

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Your advantages

- Large-surface labeling option
- Practical coding option
- Tested for railway applications

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3041736             |
| Packing unit                         | 50 pc               |
| Sales key                            | BE02                |
| Product key                          | BE2144              |
| Catalog page                         | Page 320 (C-1-2019) |
| GTIN                                 | 4046356055093       |
| Weight per piece (including packing) | 9.475 g             |
| Weight per piece (excluding packing) | 9.475 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | PL                  |

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## Technical data

### Product properties

|                     |               |
|---------------------|---------------|
| Product type        | Terminal plug |
| Number of positions | 3             |
| Pitch               | 5.2 mm        |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                     |      |
|---------------------|------|
| Rated surge voltage | 6 kV |
|---------------------|------|

### Connection data

|                                                                   |                                                       |
|-------------------------------------------------------------------|-------------------------------------------------------|
| Nominal cross section                                             | 2.5 mm <sup>2</sup>                                   |
| Stripping length                                                  | 8 mm ... 10 mm                                        |
| Internal cylindrical gage                                         | A3                                                    |
| Connection in acc. with standard                                  | IEC 61984                                             |
| Conductor cross section rigid                                     | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Cross section AWG                                                 | 28 ... 12 (converted acc. to IEC)                     |
| Conductor cross section flexible                                  | 0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Conductor cross section, flexible [AWG]                           | 28 ... 14 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Nominal current                                                   | 24 A                                                  |
| Maximum load current                                              | 24 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal voltage                                                   | 500 V                                                 |
| Nominal cross section                                             | 2.5 mm <sup>2</sup>                                   |

### Dimensions

|        |         |
|--------|---------|
| Width  | 15.6 mm |
| Height | 34 mm   |
| Length | 23.4 mm |
| Pitch  | 5.2 mm  |

### Material specifications

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Color                                                                   | gray   |
| Flammability rating according to UL 94                                  | V0     |
| Insulating material group                                               | I      |
| Insulating material                                                     | PA     |
| Static insulating material application in cold                          | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |

# SPV 2,5/ 3 - Plug



3041736

<https://www.phoenixcontact.com/us/products/3041736>

|                                                                  |             |
|------------------------------------------------------------------|-------------|
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22           | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23           | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24           | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26           | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                 | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                       | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)          | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                           | passed      |

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Standards and regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>




## Drawings

### Circuit diagram



### Diagram

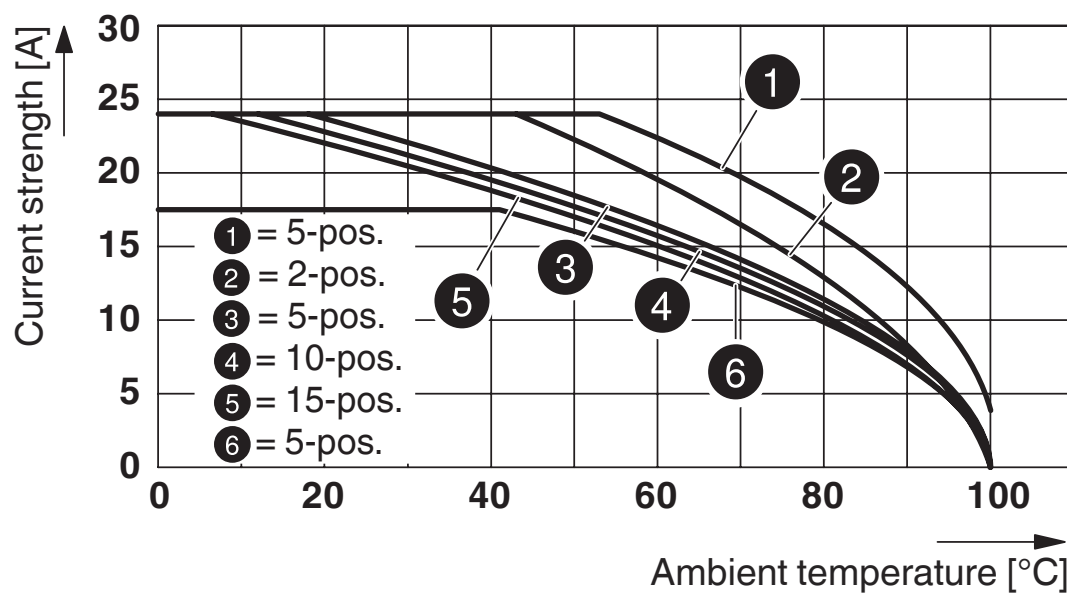

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3041736>



**IECEE CB Scheme**  
Approval ID: DE1-62736/B1/B2



**EAC**  
Approval ID: RU C-DE.BL08.B.00511

|                                                                                   |                                                        |                       |                       |                             |
|-----------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------|-----------------------|-----------------------------|
|  | <b>VDE Zeichengenehmigung</b><br>Approval ID: 40019518 |                       |                       |                             |
|                                                                                   |                                                        | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG           |
|                                                                                   | Only flexible conductors                               | 500 V                 | -                     | -                           |
|                                                                                   | Only rigid conductors                                  | 500 V                 | -                     | -                           |
|                                                                                   |                                                        |                       |                       | Cross section $\text{mm}^2$ |
|                                                                                   |                                                        |                       |                       | 0.2 - 2.5                   |
|                                                                                   |                                                        |                       |                       | 0.2 - 4                     |



**cULus Recognized**  
Approval ID: E60425



**cULus Recognized**  
Approval ID: E60425

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141151 |
| ECLASS-12.0 | 27141151 |
| ECLASS-13.0 | 27250306 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002021 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## Accessories

### PZ/2 - Strain relief

3040627

<https://www.phoenixcontact.com/us/products/3040627>



Strain relief, width: 9.3 mm, height: 48.7 mm, number of positions: 2, color: black

---

### PZ/4 - Strain relief

3040643

<https://www.phoenixcontact.com/us/products/3040643>



Strain relief, width: 19.6 mm, height: 48.7 mm, number of positions: 4, color: black



## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## PRV/2 - Latching

3041862

<https://www.phoenixcontact.com/us/products/3041862>



Latching, width: 10 mm, height: 15.8 mm, number of positions: 2, color: orange

---

## RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/us/products/1207608>

Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages



---

## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>

Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray



# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

## MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>




## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

## PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/us/products/3030983>

Test plug, Modular test plug, number of positions: 1, color: red



## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/us/products/3036725>



Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red

---

## PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/us/products/3038723>



Test plug, number of positions: 1, color: red

## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



### ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/us/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

---

### ZBF 5 CUS - Zack Marker strip, flat

0825025

<https://www.phoenixcontact.com/us/products/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10



# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/us/products/0808671>




Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/us/products/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/us/products/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/us/products/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# SPV 2,5/ 3 - Plug

3041736


<https://www.phoenixcontact.com/us/products/3041736>



## UC-TMF 5 - Marker for terminal blocks

0818153

<https://www.phoenixcontact.com/us/products/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

---

## UC-TMF 5 CUS - Marker for terminal blocks

0824638

<https://www.phoenixcontact.com/us/products/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



### UCT-TMF 5 - Marker for terminal blocks

0828744

<https://www.phoenixcontact.com/us/products/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

---

### UCT-TMF 5 CUS - Marker for terminal blocks

0829658

<https://www.phoenixcontact.com/us/products/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

## SPV 2,5/ 3 - Plug

3041736


<https://www.phoenixcontact.com/us/products/3041736>



### ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

---

### ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

---

## UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96



## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

---

## UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

## SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

---

## GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

# SPV 2,5/ 3 - Plug

3041736

<https://www.phoenixcontact.com/us/products/3041736>



## STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)