

SC 4-RZ/ 1-L - COMBI coupling

3043378

<https://www.phoenixcontact.com/sg/products/3043378>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



COMBI coupling, nom. voltage: 800 V, nominal current: 32 A, number of connections: 2, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 4 mm², cross section: 0.08 mm² - 6 mm², mounting type: on mounting panel, color: gray

Your advantages

- By means of a securing pin, these couplings can be inserted directly into a pre-drilled or punched mounting panel
- Types for self-assembly offer the option of direct mounting
- To ensure a secure fit, the bore holes must be burr-free

Commercial data

Item number	3043378
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	0167*
Product key	BE2145
Catalog page	Page 342 (C-1-2019)
GTIN	4046356012911
Weight per piece (including packing)	6.522 g
Weight per piece (excluding packing)	6.522 g
Customs tariff number	85366990
Country of origin	PL

SC 4-RZ/ 1-L - COMBI coupling

3043378

<https://www.phoenixcontact.com/sg/products/3043378>



Technical data

Product properties

Product type	Terminal coupling
Number of positions	1
Pitch	6.2 mm
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Nominal cross section	4 mm ²
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.08 mm ² ... 6 mm ²
Cross section AWG	28 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	28 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	32 A
Maximum load current	32 A (with 6 mm ² conductor cross section)
Nominal voltage	800 V
Nominal cross section	4 mm ²

Dimensions

Width	6.2 mm
End cover width	3.2 mm
Height	31 mm
Drill hole spacing	6.2 mm
Hole diameter	3.5 mm
Pitch	6.2 mm
Plate thickness	0.8 mm ... 1.5 mm

SC 4-RZ/ 1-L - COMBI coupling



3043378

<https://www.phoenixcontact.com/sg/products/3043378>

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Technical data

Drill hole spacing	6.2 mm
--------------------	--------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

Mounting

Mounting type	on mounting panel
Assembly instructions	Use of a parallel pressing tool is recommended for easy latching of the COMBI connector and coupling elements for self-assembly
Plate thickness	0.8 mm ... 1.5 mm

SC 4-RZ/ 1-L - COMBI coupling


3043378

<https://www.phoenixcontact.com/sg/products/3043378>



Drawings

Drilling plan/solder pad geometry

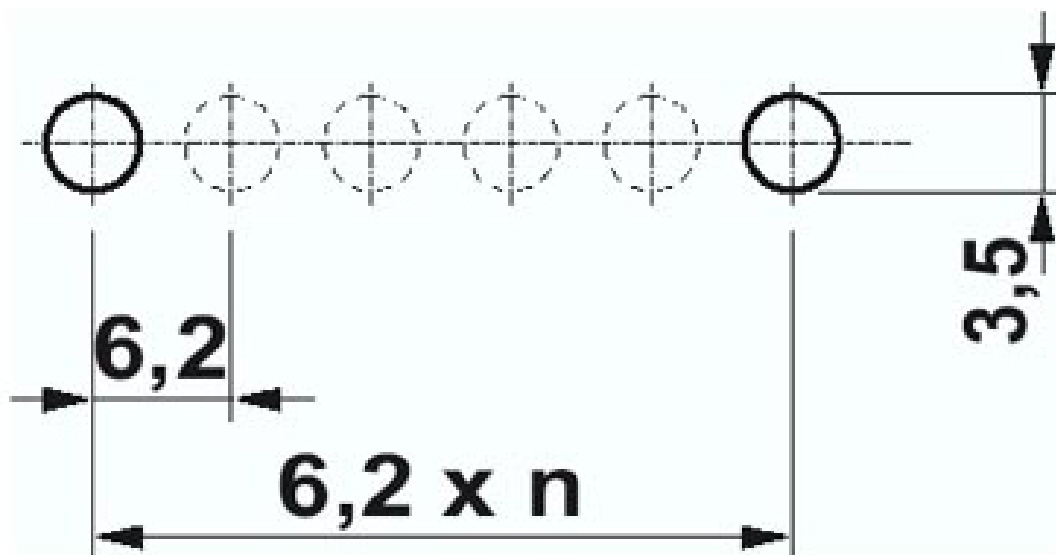

Drilling plan SC 4-RZ..., example: 1 x SC 4-RZ/ 6, metal thickness: 0.8-1.5 mm


SC 4-RZ/ 1-L - COMBI coupling

3043378

<https://www.phoenixcontact.com/sg/products/3043378>



Diagram

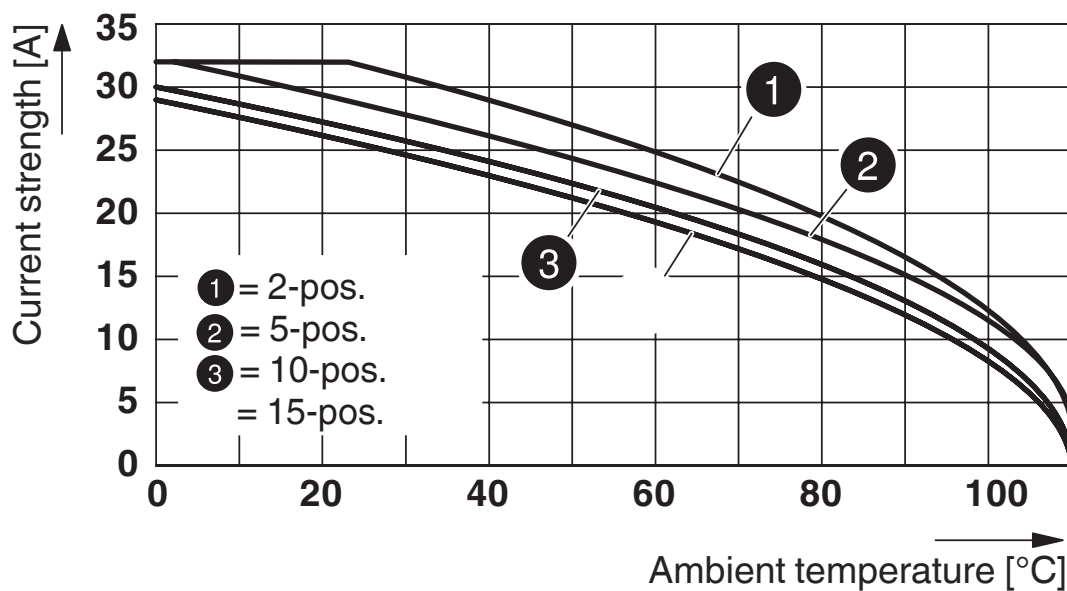

Circuit diagram



SC 4-RZ/ 1-L - COMBI coupling



3043378

<https://www.phoenixcontact.com/sg/products/3043378>

Classifications

ECLASS

ECLASS-11.0	27141151
-------------	----------

ETIM

ETIM 8.0	EC002021
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SC 4-RZ/ 1-L - COMBI coupling



3043378

<https://www.phoenixcontact.com/sg/products/3043378>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg