


RTO 5-PE-TC - Ground terminal



3049974
<https://www.phoenixcontact.com/mx/products/3049974>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal block with bolt connection technology and transparent safety contact hood, cross section: 0.1 - 6 mm², AWG: 26 - 10, width 16.3 mm, color: green-yellow

Your advantages

- Low contact resistance
- Corrosion-free terminal points
- Another labeling option
- Green-yellow housing

Commercial data

Item number	3049974
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	02
Product key	BE4312
Catalog page	Page 381 (C-1-2019)
GTIN	4046356431392
Weight per piece (including packing)	41.015 g
Weight per piece (excluding packing)	37.48 g
Customs tariff number	85369010
Country of origin	CN

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Technical data

Notes

General	Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories).
---------	---

Product properties

Product type	Bolt connection terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	6 mm ²

1 level

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-2
Nominal current	41 A
Maximum load current	41 A (with 6 mm ² conductor connection)
Nominal voltage	1000 V

Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	0.5 mm ² ... 6 mm ²
Cross section range AWG	20 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm
Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Connection in acc. with standard	DIN 46237:1970-07
Cross section	1 mm ² ... 6 mm ²

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Cross section range AWG	16 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm
Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Identification color of ring cable lugs : red	1 mm ²
Identification color of ring cable lugs : blue	2.5 mm ²
Identification color of ring cable lugs : yellow	6 mm ²

Dimensions

Width	16.3 mm
End cover width	2.2 mm
Height	66 mm
Depth on NS 35/7,5	51 mm
Depth on NS 35/15	58.5 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

ASD level	6.12 (m/s ²)/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis

Shocks

Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

RTO 5-PE-TC - Ground terminal




3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Drawings

Circuit diagram

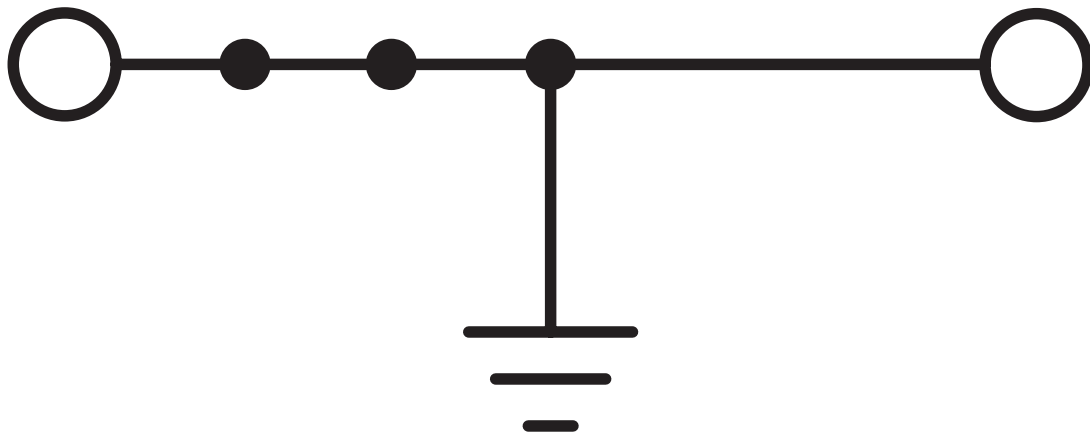

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/mx/products/3049974>



EAC

Approval ID: RU C-DE.BL08.B.00540

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250103

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

Accessories

FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/mx/products/3030284>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

FBS 3-8 - Plug-in bridge

3030297

<https://www.phoenixcontact.com/mx/products/3030297>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 4-8 - Plug-in bridge

3030307

<https://www.phoenixcontact.com/mx/products/3030307>

Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red



FBS 5-8 - Plug-in bridge

3030310

<https://www.phoenixcontact.com/mx/products/3030310>

Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 10-8 - Plug-in bridge

3030323

<https://www.phoenixcontact.com/mx/products/3030323>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

FBSRH 2-8 - Short-circuit connector

3033802

<https://www.phoenixcontact.com/mx/products/3033802>



Short-circuit connector, pitch: 8.2 mm, number of positions: 2, color: red

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBSRH 3-8 - Short-circuit connector

3033803

<https://www.phoenixcontact.com/mx/products/3033803>



Short-circuit connector, pitch: 8.2 mm, number of positions: 3, color: red

FBSRH 4-8 - Short-circuit connector

3033804

<https://www.phoenixcontact.com/mx/products/3033804>



Short-circuit connector, pitch: 8.2 mm, number of positions: 4, color: red

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 2-8 CT - Plug-in bridge

3033830

<https://www.phoenixcontact.com/mx/products/3033830>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

FBS 3-8 CT - Plug-in bridge

3033831

<https://www.phoenixcontact.com/mx/products/3033831>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 4-8 CT - Plug-in bridge

3033832

<https://www.phoenixcontact.com/mx/products/3033832>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

FBS 10-8 CT - Plug-in bridge

3033833

<https://www.phoenixcontact.com/mx/products/3033833>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/mx/products/3032567>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

FBS 3-8 BU - Plug-in bridge

3032570

<https://www.phoenixcontact.com/mx/products/3032570>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 4-8 BU - Plug-in bridge

3032583

<https://www.phoenixcontact.com/mx/products/3032583>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

FBS 5-8 BU - Plug-in bridge

3032596

<https://www.phoenixcontact.com/mx/products/3032596>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



FBS 6-8 BU - Plug-in bridge

3032677

<https://www.phoenixcontact.com/mx/products/3032677>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

FBS 10-8 BU - Plug-in bridge

3032606

<https://www.phoenixcontact.com/mx/products/3032606>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



D-RT 3/5 - End cover

3049097

<https://www.phoenixcontact.com/mx/products/3049097>

End cover, depth: 42.2 mm, width: 2.2 mm, height: 65 mm, color: gray



TPNS-UK - Partition plate

0706647

<https://www.phoenixcontact.com/mx/products/0706647>

Partition plate, depth: 70 mm, width: 2 mm, height: 80 mm, color: gray



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



BE-RT 3/5 - Path extension

3049819

<https://www.phoenixcontact.com/mx/products/3049819>



Path extension, color: gray

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/mx/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/mx/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/mx/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/mx/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/mx/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/mx/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/mx/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/mx/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/mx/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/mx/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/mx/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/mx/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/mx/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/mx/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/mx/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/mx/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/mx/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/mx/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/mx/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

RTO 5-PE-TC - Ground terminal

3049974


<https://www.phoenixcontact.com/mx/products/3049974>



ZB 16:UNPRINTED - Zack marker strip

0827461

<https://www.phoenixcontact.com/mx/products/0827461>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 16 mm, lettering field size: 16 x 10.5 mm, Number of individual labels: 50

ZB 16 CUS - Zack marker strip

0827463

<https://www.phoenixcontact.com/mx/products/0827463>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16 mm, lettering field size: 10.5 x 16 mm, Number of individual labels: 5

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



ZB 16,LGS:L1-N,PE - Zack marker strip

0827462

<https://www.phoenixcontact.com/mx/products/0827462>



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

UC-TM 16 - Marker for terminal blocks

0819217

<https://www.phoenixcontact.com/mx/products/0819217>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 16 mm, lettering field size: 15.45 x 10.5 mm, Number of individual labels: 32

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



UC-TM 16 CUS - Marker for terminal blocks

0824621

<https://www.phoenixcontact.com/mx/products/0824621>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16 mm, lettering field size: 15.45 x 10.5 mm, Number of individual labels: 32

UCT-TM 16 - Marker for terminal blocks

0829146

<https://www.phoenixcontact.com/mx/products/0829146>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 16 mm, lettering field size: 14.8 x 9.6 mm, Number of individual labels: 18

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



UCT-TM 16 CUS - Marker for terminal blocks

0829637

<https://www.phoenixcontact.com/mx/products/0829637>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16 mm, lettering field size: 14.8 x 9.6 mm, Number of individual labels: 18

ZB 16,3:UNPRINTED - Zack marker strip

0820222

<https://www.phoenixcontact.com/mx/products/0820222>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

RTO 5-PE-TC - Ground terminal

3049974


<https://www.phoenixcontact.com/mx/products/3049974>



ZB 16,3 CUS - Zack marker strip

0824946

<https://www.phoenixcontact.com/mx/products/0824946>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/mx/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/mx/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/mx/products/0201676>

Insulating sleeve, color: red



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/mx/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/mx/products/0201692>

Insulating sleeve, color: yellow



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/mx/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/mx/products/0201728>

Insulating sleeve, color: gray



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/mx/products/0201731>

Insulating sleeve, color: black



PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/mx/products/3032871>

4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



PS-8 - Test plug

3031005

<https://www.phoenixcontact.com/mx/products/3031005>



Test plug, Modular test plug, number of positions: 1, color: red

DP PS-8 - Spacer plate

3036741

<https://www.phoenixcontact.com/mx/products/3036741>



Spacer plate, depth: 29 mm, width: 8.2 mm, height: 22.4 mm, number of positions: 1, color: red

RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



PS-8/2,3MM RD - Test plug

3048564

<https://www.phoenixcontact.com/mx/products/3048564>

Test plug, number of positions: 1, color: red



CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/mx/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/mx/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/mx/products/0800886>



End clamp, width: 9.5 mm, color: gray

RTO 5-PE-TC - Ground terminal



3049974

<https://www.phoenixcontact.com/mx/products/3049974>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/mx/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/mx/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



RTO 5-PE-TC - Ground terminal

3049974

<https://www.phoenixcontact.com/mx/products/3049974>



SHN 8 - Tool

1209868

<https://www.phoenixcontact.com/mx/products/1209868>

Socket wrench, wrench size 8 mm



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT S.A. de C.V.

Lago Alberto No. 319 - Piso 9

Colonia Granada, Delegación Miguel Hidalgo, México, Ciudad de México, C.P. 11520

+52/55/1101-1380

ventas@phoenixcontact.com.mx