

# QTC 1,5-TWIN-TG - Disconnect terminal block



3050413

<https://www.phoenixcontact.com/au/products/3050413>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Disconnect terminal block, nom. voltage: 400 V, nominal current: 17.5 A, number of connections: 3, connection method: Quick connection, 1 level, Rated cross section: 1.5 mm<sup>2</sup>, cross section: 0.25 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- The insulated P-FIX (1) feed-through connector enables the installation of a feed-through terminal of the same shape
- The P-DI (2) isolating plug can be used in all disconnect terminal blocks. Following disconnection, the P-DI can be "parked" back to front in the basic terminal block.
- The P-CO(3) component plug is used to accommodate different components such as resistors or diodes
- Disconnect terminal block with universal disconnect zone for accommodating isolating plugs, feed-through connectors, component plugs, and fuse plugs
- Tested for railway applications

## Commercial data

Item number	3050413
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE3132
Product key	BE3132
Catalog page	Page 258 (C-1-2019)
GTIN	4046356079273
Weight per piece (including packing)	13.652 g
Weight per piece (excluding packing)	13.46 g
Customs tariff number	85369010
Country of origin	CN

# QTC 1,5-TWIN-TG - Disconnect terminal block

3050413

<https://www.phoenixcontact.com/au/products/3050413>



## Technical data

### Notes

General	The max. load current must not be exceeded by the total current of all connected conductors. Current and voltage are determined by the plug used.
---------	--

### Product properties

Product type	Disconnect terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	3
Number of rows	1
Potentials	1

### Insulation characteristics

Ovvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

### Connection data

Number of connections per level	3
Frequency of connections with the same cross section	100
Nominal cross section	1.5 mm <sup>2</sup>

#### 1 level

Material wire insulation	PVC / PE
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Cross section AWG	24 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 16 (converted acc. to IEC)
Nominal current	17.5 A
Maximum load current	17.5 A (with 1.5 mm <sup>2</sup> conductor cross section)
Nominal voltage	400 V
Nominal cross section	1.5 mm <sup>2</sup>

### Dimensions

Width	5.2 mm
End cover width	2.2 mm
Height	94 mm

# QTC 1,5-TWIN-TG - Disconnect terminal block



3050413

<https://www.phoenixcontact.com/au/products/3050413>

Depth	39.3 mm
Depth on NS 35/7,5	39.3 mm
Depth on NS 35/15	46.8 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Cable/line

Wire diameter incl. insulation	3 mm
--------------------------------	------

## Electrical tests

Surge voltage test	
Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test	
Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 1.5 mm <sup>2</sup>	0.18 kA
Result	Test passed

Power-frequency withstand voltage	
Test voltage setpoint	1.89 kV
Result	Test passed

## Mechanical properties

Mechanical data	
Open side panel	Yes

## Mechanical tests

# QTC 1,5-TWIN-TG - Disconnect terminal block

3050413

<https://www.phoenixcontact.com/au/products/3050413>



## Mechanical strength

Result	Test passed
--------	-------------

## Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	1 N
Result	Test passed

## Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.2 mm <sup>2</sup> / 0.2 kg
	1.5 mm <sup>2</sup> / 0.4 kg
Result	Test passed

## Environmental and real-life conditions

### Aging

Temperature cycles	192
Result	Test passed

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# QTC 1,5-TWIN-TG - Disconnect terminal block


3050413

<https://www.phoenixcontact.com/au/products/3050413>



## Drawings

Circuit diagram

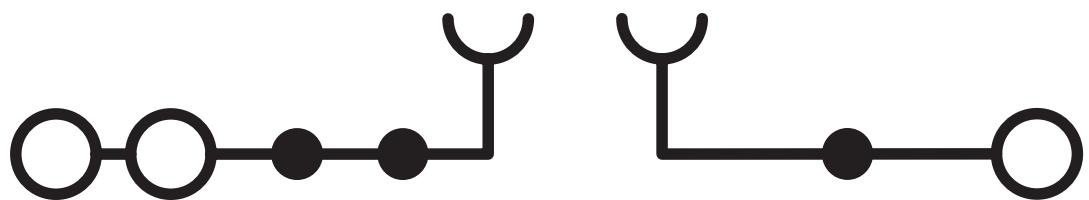

# QTC 1,5-TWIN-TG - Disconnect terminal block



3050413

<https://www.phoenixcontact.com/au/products/3050413>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3050413>



**EAC**

Approval ID: RU C-DE.BL08.B.00539

# QTC 1,5-TWIN-TG - Disconnect terminal block

3050413

<https://www.phoenixcontact.com/au/products/3050413>



## Classifications

### ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250108

### ETIM

ETIM 9.0	EC000902
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# QTC 1,5-TWIN-TG - Disconnect terminal block

3050413

<https://www.phoenixcontact.com/au/products/3050413>



## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmer NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)