

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse holder, fuse type: gPV 10.3 x 38 mm in accordance with 60269-6, nom. voltage: 1000 V DC, nominal current: 20 A, connection method: Push-in connection, Rated cross section: 10 mm², cross section: 1.5 mm²- 10 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- Fuse holder for fusing PV strings 1000 V DC
- Quick identification of faulty fuses regardless of the current direction, thanks to LED status indicator
- For 10 x 38 gPV fuse-links in accordance with IEC 60269-6

Commercial data

Item number	3062143
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	*****
Product key	BE2234
Catalog page	Page 122 (C-1-2019)
GTIN	4046356724739
Weight per piece (including packing)	54.84 g
Weight per piece (excluding packing)	54.84 g
Customs tariff number	85369095
Country of origin	CN

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	4 W
Fuse	gPV 10.3 x 38 mm in accordance with 60269-6
LED voltage range	400 V DC ... 1000 V DC
Maximum power dissipation	3 W (Fuse insert)

Input data

LED voltage range	400 V DC ... 1000 V DC
-------------------	------------------------

Connection data

Number of connections per level	2
Nominal cross section	10 mm ²
Rated cross section AWG	6
Stripping length	18 mm
Connection in acc. with standard	IEC 60269-1 / -2
Conductor cross section rigid	1.5 mm ² ... 10 mm ²
Cross section AWG	14 ... 8 (converted acc. to IEC)
Conductor cross section flexible	1.5 mm ² ... 16 mm ²
Conductor cross section, flexible [AWG]	14 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 10 mm ²
Nominal current	20 A (the current is determined by the fuse used)
Maximum load current	20 A (the current is determined by the fuse used)
Nominal voltage	1000 V DC (the voltage is determined by the fuse used)
Nominal cross section	10 mm ²

Connection cross sections directly pluggable

Conductor cross section rigid	1.5 mm ² ... 10 mm ²
Conductor cross section, rigid [AWG]	16 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	4 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	2.5 mm ² ... 10 mm ²

Dimensions

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Width	17.6 mm
Height	87 mm
Depth on NS 35/7,5	63 mm
Depth on NS 35/15	70.5 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	IIIa
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 85 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60269-1 / -2
----------------------------------	------------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

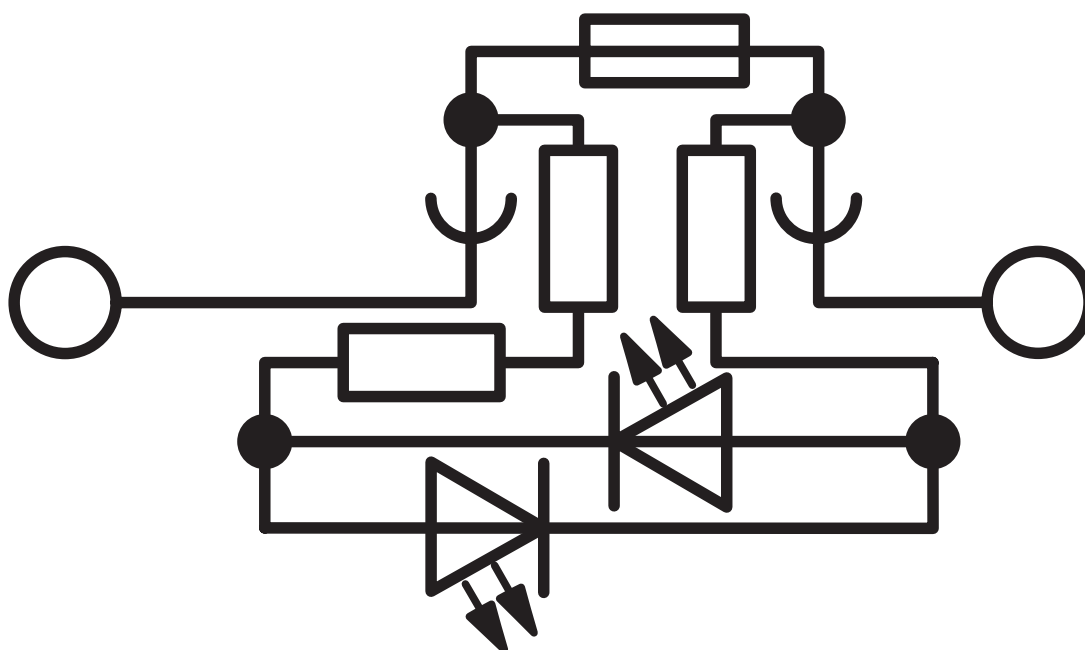

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/3062143>

**EAC**
Approval ID: RU C-DE.BL08.B.00644

	UL Listed Approval ID: FILE E 353282			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	1000 V	32 A	-	16 - 6

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PT 10,3-HESILED 1000V - Fuse holder



3062143

<https://www.phoenixcontact.com/sg/products/3062143>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg