

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block

3073953
<https://www.phoenixcontact.com/pc/products/3073953>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse terminal block for cartridge fuse insert, cross section: 0.5 - 16 mm², AWG: 24 - 6, width: 12 mm, color: black

Your advantages

- Can be bridged with FBI ... fixed bridge

Commercial data

Item number	3073953
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE1235
GTIN	4046356343121
Weight per piece (including packing)	33.8 g
Weight per piece (excluding packing)	33.8 g
Customs tariff number	85369095
Country of origin	PL

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953

<https://www.phoenixcontact.com/pc/products/3073953>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	2.43 W
Fuse	G / 5 x 20

Connection data

Number of connections per level	2
Nominal cross section	16 mm ²

Level 1 above 1 below 1

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	11 mm
Internal cylindrical gage	B6
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm ² ... 16 mm ²
Cross section AWG	20 ... 6 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 16 mm ²
Conductor cross section, flexible [AWG]	20 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 10 mm ²
Cross-section with insertion bridge, rigid	10 mm ²
Cross-section with insertion bridge, flexible	10 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 10 mm ²
Nominal current	10 A
Maximum load current	10 A
Nominal voltage	500 V (As a fuse terminal block)

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953

<https://www.phoenixcontact.com/pc/products/3073953>

	800 V (As a disconnect terminal block)
Nominal cross section	1.5 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	Ⓔ II 3 GD Ex nA IIC Gc
Operating temperature range	-50 °C ... 125 °C
Ex-certified accessories	1205066 SZS 1,0X4,0 VDE
	1201442 E/UK
Rated voltage	275 V
Rated insulation voltage	250 V
output	(Permanent)

Ex level General

Rated current	6.3 A
Maximum load current	6.3 A

Ex connection data General

Torque range	1.5 Nm ... 1.8 Nm
Nominal cross section	16 mm ²
Rated cross section AWG	6
Connection capacity rigid	0.5 mm ² ... 16 mm ²
Connection capacity AWG	20 ... 6
Connection capacity flexible	0.5 mm ² ... 16 mm ²
Connection capacity AWG	20 ... 6
2 conductors with same cross section, solid	0.5 mm ² ... 4 mm ²
2 conductors with the same cross-section AWG rigid	20 ... 10
2 conductors with same cross section, stranded	0.5 mm ² ... 4 mm ²
2 conductors with the same cross-section AWG flexible	20 ... 10

Dimensions

Width	12 mm
Height	62 mm
Depth on NS 32	62.2 mm
Depth on NS 35/7,5	57.2 mm
Depth on NS 35/15	64.7 mm

Material specifications

Color	black
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA

Mechanical properties

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953

<https://www.phoenixcontact.com/pc/products/3073953>

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block




3073953

<https://www.phoenixcontact.com/pc/products/3073953>

Drawings

Circuit diagram

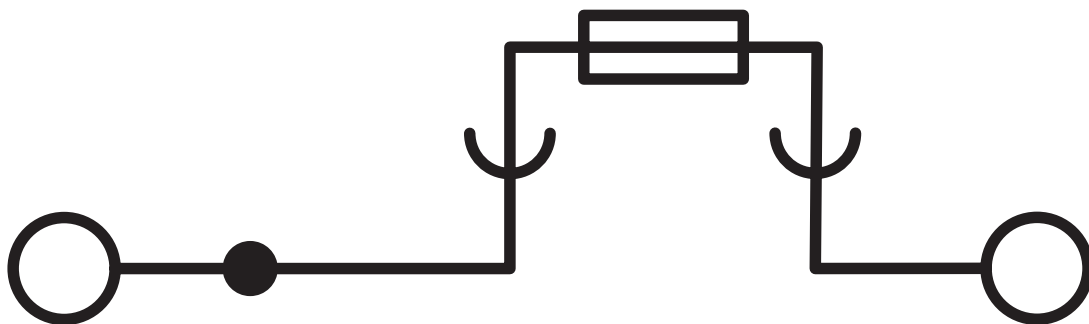

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953

<https://www.phoenixcontact.com/pc/products/3073953>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3073953>



EAC

Approval ID: RU C-DE.BL08.B.00534



ATEX

Approval ID: KEMA10ATEX0096U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	6.3 A	-	0.5 - 16



IECEx

Approval ID: IECExKEM10.0054U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	6.3 A	-	0.5 - 16



CCC

Approval ID: 2020322313000632



UKCA-EX

Approval ID: DEKRA 22UKEX6025U

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953

<https://www.phoenixcontact.com/pc/products/3073953>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UK 10-DREHSI-EX (5X20) - Fuse modular terminal block



3073953
<https://www.phoenixcontact.com/pc/products/3073953>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com