3201589

https://www.phoenixcontact.com/gb/products/3201589



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ferrule, sleeve length: 8 mm, color: yellow



Your advantages

- The taped ferrules were developed specifically for the CF 3000-2,5 automatic crimping device
- Available in the main color ranges up to 2.5 mm²
- · Can be used to wire all terminal blocks, especially those of the CLIPLINE complete system

Commercial data

Item number	3201589
Packing unit	1,000 pc
Minimum order quantity	1,000 pc
Sales key	BH3414
Product key	BH3414
Catalog page	Page 515 (C-3-2019)
GTIN	4017918126230
Weight per piece (including packing)	0.146 g
Weight per piece (excluding packing)	0.146 g
Customs tariff number	85369010
Country of origin	DE

3201589

https://www.phoenixcontact.com/gb/products/3201589



Technical data

Product properties

Product type	Cable end sleeve
Conductor category	stranded conductors, class 2, 5, 6 / B, C, K, M


Connection data

(Conductor	connection	

Conductor cross section flexible max.	1 mm²
Conductor cross section AWG max.	18
Stripping length	11 mm

Dimensions

Dimensional drawing



Sleeve length	8 mm
Maximum stripping length	11 mm
Ferrule diameter	1.5 mm
Sleeve wall thickness	0.15 mm
Insulating collar thickness	0.3 mm
Inner dimensions of the insulating collar	3 mm

Material specifications

Color	yellow
Material	CU-DHP
Flammability rating according to UL 94	НВ
Coating	tin-plated (galvanic)
Components	free from silicone and halogen

Mechanical properties

Technical data	
Sleeve length	8 mm

Environmental and real-life conditions

Ambient conditions	
Permanent temperature	105 °C (-40 °C no load / 0 °C dynamic load)
Short-term temperature	120 °C

Standards and regulations



3201589 https://www.phoenixcontact.com/gb/products/3201589



Design according to standard


Special color

- 8 YE-B - Ferrule AI 1

3201589 https://www.phoenixcontact.com/gb/products/3201589



Drawings

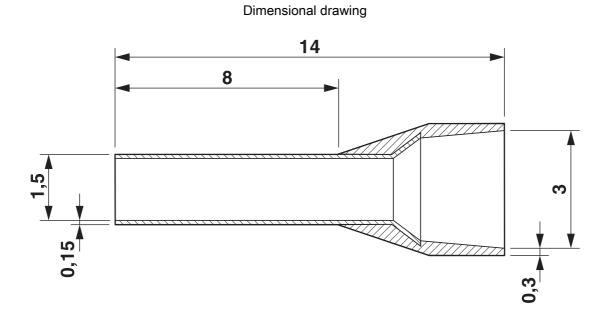

- 8 YE-B - Ferrule AI 1

3201589

https://www.phoenixcontact.com/gb/products/3201589



Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/3201589



cULus Listed Approval ID: E488001

3201589

https://www.phoenixcontact.com/gb/products/3201589



Classifications

ECLASS

ECLASS-11.0	27400201
ECLASS-12.0	27400201
ECLASS-13.0	27400201

ETIM

	ETIM 9.0	EC000005	
UN	UNSPSC		
	UNSPSC 21.0	27121700	

3201589

https://www.phoenixcontact.com/gb/products/3201589



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk