

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal, connection method: Quick connection, cross section: 0.25 mm² - 1.5 mm², connection method: Spring-cage connection, cross section: 0.08 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- Same shape and pitch as the feed-through terminal blocks
- Contact is made free from mechanical and electrical errors by simply snapping onto the DIN rail
- All the requirements of standard IEC 60947-7-2 are met

Commercial data

Item number	3206364
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE3129
Catalog page	Page 261 (C-1-2019)
GTIN	4017918975999
Weight per piece (including packing)	13.306 g
Weight per piece (excluding packing)	13.306 g
Customs tariff number	85369010
Country of origin	CN

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Technical data

Product properties

Product type	Ground terminal block
Number of connections	3
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Grounding foot	Yes
Number of connections per level	3
Frequency of connections with the same cross section	100
Nominal cross section	1.5 mm ²

Level 1 above 1+2

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	10 mm
Material wire insulation	PVC / PE
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.25 mm ² ... 1.5 mm ²
Cross section AWG	24 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.25 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 16 (converted acc. to IEC)
Cross section, sensor conductors	0.25 mm ² ... 0.34 mm ²

Level 1 below 1

Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.08 mm ² ... 4 mm ²
Cross section AWG	28 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 2.5 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²

Ex data

Rated data (ATEX/IECEx)

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Identification	II 2 GD Ex eb IIC Gb
Operating temperature range	-45 °C ... 90 °C
Ex-certified accessories	3206403 D-QTCS 1,5-TWIN
	1204517 SZF 1-0,6X3,5
	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
output	(Permanent)

Ex connection data Fast connection

Nominal cross section	1.5 mm²
Rated cross section AWG	16
Connection capacity rigid	0.25 mm² ... 1.5 mm²
Connection capacity AWG	24 ... 16
Connection capacity flexible	0.25 mm² ... 1.5 mm²
Connection capacity AWG	24 ... 16
Frequency of connections with the same cross section	100

Ex connection data Spring-cage connection

Nominal cross section	1.5 mm²
Rated cross section AWG	16
Connection capacity rigid	0.08 mm² ... 4 mm²
Connection capacity AWG	28 ... 12
Connection capacity flexible	0.08 mm² ... 2.5 mm²
Connection capacity AWG	28 ... 14

Dimensions

Width	5.2 mm
End cover width	2.2 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Smoke gas toxicity NFPA 130 (SMP 800C)	passed
--	--------

Cable/line

Wire diameter incl. insulation	3 mm
--------------------------------	------

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
	IEC 60947-7-2

Mounting

Mounting type	NS 35/7,5
	NS 35/15

QTCS 1,5-TWIN-PE - Ground terminal


3206364

<https://www.phoenixcontact.com/pc/products/3206364>



Drawings

Circuit diagram

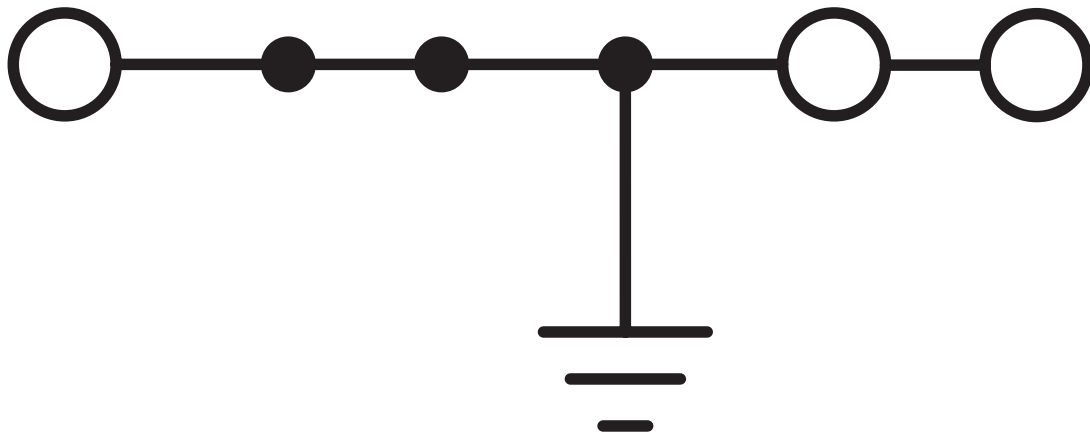

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Classifications

ECLASS

ECLASS-11.0	27141141
-------------	----------

ETIM

ETIM 8.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

QTCS 1,5-TWIN-PE - Ground terminal



3206364

<https://www.phoenixcontact.com/pc/products/3206364>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com