

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

PCB header, 10-pos.



Commercial data

Item number	3208736
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	BE643X
Catalog page	Page 334 (C-1-2019)
GTIN	4055626012681
Weight per piece (including packing)	43.46 g
Weight per piece (excluding packing)	43.46 g
Customs tariff number	85366990
Country of origin	PL

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Technical data

Product properties

Product type	Plug
Number of positions	10
Pitch	6.1 mm
Number of connections	10
Number of rows	1
Potentials	10

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.02 W


Connection data

Nominal cross section	4 mm²
Rated cross section AWG	10

Level 1

Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.5 mm² ... 2.5 mm²
Cross section AWG	20 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm² ... 2.5 mm²
Conductor cross section, flexible [AWG]	20 ... 14 (converted acc. to IEC)
Nominal current	15 A
Maximum load current	30 A
Nominal voltage	320 V

Dimensions

Dimensional drawing	
Width	97.5 mm
Height	29.1 mm
Depth	34.3 mm
Pitch	6.1 mm

Material specifications

Color	gray
-------	------

FC 4-PCB/10 - Connector



3208736

<https://www.phoenixcontact.com/pc/products/3208736>

Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Short-time withstand current 2.5 mm ²	0.01 kA
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 60255-21-1:1996-05 (following)
Frequency	10 Hz ... 150 Hz
Acceleration	1g (84.2 Hz ... 150 Hz)
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 60255-21-1:1996-05 (following)
Pulse shape	Half-sine
Acceleration	30g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

FC 4-PCB/10 - Connector



3208736

<https://www.phoenixcontact.com/pc/products/3208736>

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

Mounting

Mounting type	PCB mounting
---------------	--------------

FC 4-PCB/10 - Connector


3208736

<https://www.phoenixcontact.com/pc/products/3208736>




Drawings

Circuit diagram

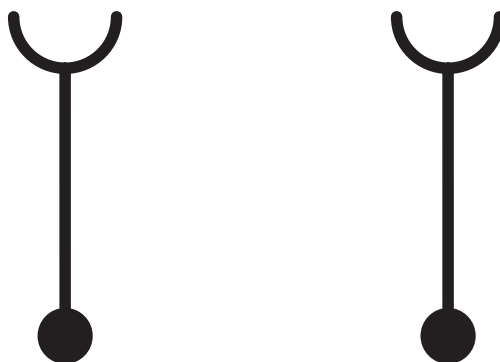

Dimensional drawing

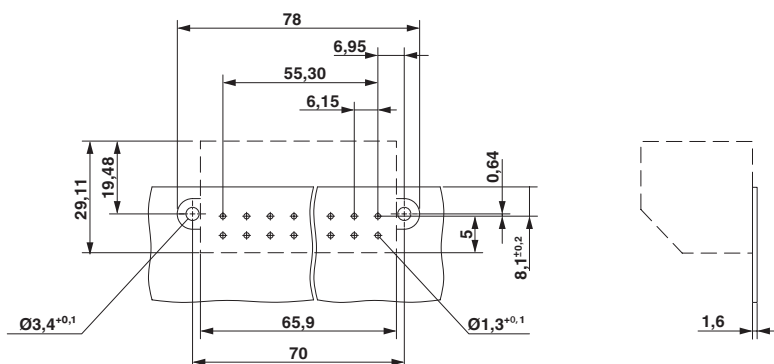

Drilling diagram

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3208736>



EAC

Approval ID: RU C-DE.BL08.B.00511

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Classifications

ECLASS

ECLASS-11.0	27141133
ECLASS-12.0	27141133
ECLASS-13.0	27250301

ETIM

ETIM 9.0	EC000886
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



Accessories

PC - Coding star

3040588

<https://www.phoenixcontact.com/pc/products/3040588>



Coding star, 4-section, depth: 6 mm, width: 3 mm, height: 3 mm, color: red

ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/pc/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/pc/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

UC-TMF 6 - Marker for terminal blocks

0818140

<https://www.phoenixcontact.com/pc/products/0818140>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



UC-TMF 6 CUS - Marker for terminal blocks

0824646

<https://www.phoenixcontact.com/pc/products/0824646>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

UCT-TMF 6 - Marker for terminal blocks

0828746

<https://www.phoenixcontact.com/pc/products/0828746>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



UCT-TMF 6 CUS - Marker for terminal blocks

0829665

<https://www.phoenixcontact.com/pc/products/0829665>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

<https://www.phoenixcontact.com/pc/products/0808749>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/pc/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

<https://www.phoenixcontact.com/pc/products/0810834>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

<https://www.phoenixcontact.com/pc/products/0810876>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/pc/products/3208733>



Plug for five current transformers, each with leading transformer short circuit

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



BP 4-5VT - Plug

3208734

<https://www.phoenixcontact.com/pc/products/3208734>

Plug for five voltage transducers



C-SCFI 1,5/6,3X0,8 - Connector

3240052

<https://www.phoenixcontact.com/pc/products/3240052>

Slip-on sleeve, red, 0.5 ... 1.5 mm², 6.3 x 0.8



FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



C-SCFI 2,5/6,3X0,8 - Connector

3240055

<https://www.phoenixcontact.com/pc/products/3240055>



Slip-on sleeve, blue, 1.5 ... 2.5 mm², 6.3 x 0.8

C-SCFI 6/6,3X0,8 - Connector

3240056

<https://www.phoenixcontact.com/pc/products/3240056>



Slip-on sleeve, yellow, 4 ... 6 mm², 6.3 x 0.8

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



C-SCFFI 1,5/6,3X0,8 - Connector

3240538

<https://www.phoenixcontact.com/pc/products/3240538>



Slip-on sleeve, fully isolated, red, 0.5 ... 1.5 mm², for plug 6.3 x 0.8 mm

C-SCFFI 2,5/6,3X0,8 - Connector

3240547

<https://www.phoenixcontact.com/pc/products/3240547>



Slip-on sleeve, fully isolated, blue, 1.5 ... 2.5 mm², for plug 6.3 x 0.8 mm

FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/pc/products/3208736>



C-SCFFI 6/6,3X0,8 - Connector

3240541

<https://www.phoenixcontact.com/pc/products/3240541>



Slip-on sleeve, fully insulated, yellow, 4 ... 6 mm², for 6.3 x 0.8 mm plugs

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com