


STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, nom. voltage: 24 V, nominal current: 18 A, number of connections: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Three-conductor output terminal block of the same shape with PE connection in the lower level for wiring actuators
- Power terminal blocks can be located at any point on the terminal strip for supply or extension purposes
- Versions with LED for indicating the switching states
- Easy bridging and potential distribution using the patented plug-in bridges from the CLIPLINE complete system
- For space and time-saving wiring of three-conductor initiators and actuators
- The upper level is for signal wiring, whereas the two lower levels are used to distribute the positive and negative potential
- Potential is supplied via the STIO-IN power terminal blocks

Commercial data

Item number	3209138
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE2117
Catalog page	Page 214 (C-1-2019)
GTIN	4046356143516
Weight per piece (including packing)	11.83 g
Weight per piece (excluding packing)	11.83 g
Customs tariff number	85369010
Country of origin	TR

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

Technical data

Product properties

Product type	Sensor/actuator terminal block
Number of connections	4
Number of rows	3

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	2.5 mm ²
Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	8 mm ... 10 mm
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.08 mm ² ... 4 mm ²
Cross section AWG	28 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	28 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	18 A
Maximum load current	18 A (with 4 mm ² conductor cross section)
Nominal voltage	24 V (Light indicator, red)
Nominal cross section	2.5 mm ²

Dimensions

Width	5.2 mm
End cover width	2.2 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
----------------------------------	-----------------------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block

3209138

<https://www.phoenixcontact.com/pc/products/3209138>

Drawings

Circuit diagram

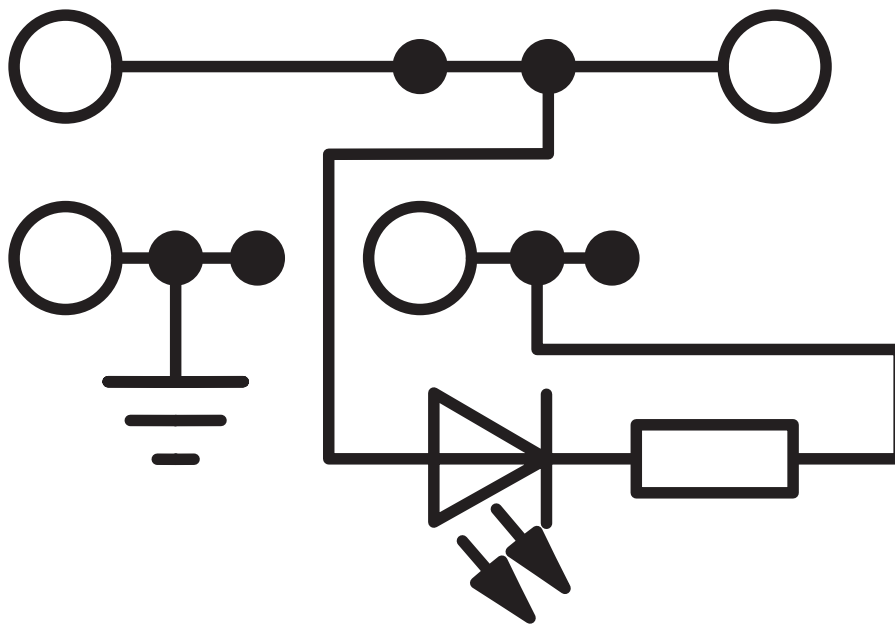

3209138
<https://www.phoenixcontact.com/pc/products/3209138>

Classifications

ECLASS		
	ECLASS-11.0	27141128
ETIM		
	ETIM 8.0	EC000900
UNSPSC		
	UNSPSC 21.0	39121400

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138
<https://www.phoenixcontact.com/pc/products/3209138>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

Accessories



Note: Applying some accessories below might limit this product.

FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/pc/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red



Max. current carrying capacity: 24 A

FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red



Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/pc/products/3030187>

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red



 Max. current carrying capacity: 24 A

FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/pc/products/3030190>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/pc/products/3030213>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red



 Max. current carrying capacity: 24 A

FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/pc/products/3030226>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/pc/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 24 A

FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/pc/products/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/pc/products/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/pc/products/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/pc/products/3036903>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue



 Max. current carrying capacity: 24 A

FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/pc/products/3036916>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/pc/products/3036929>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue



 Max. current carrying capacity: 24 A

FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/pc/products/3032114>

Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 2-5 GY - Plug-in bridge

3038969

<https://www.phoenixcontact.com/pc/products/3038969>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 24 A

FBS 3-5 GY - Plug-in bridge

3038972

<https://www.phoenixcontact.com/pc/products/3038972>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 4-5 GY - Plug-in bridge

3038985

<https://www.phoenixcontact.com/pc/products/3038985>

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: gray



 Max. current carrying capacity: 24 A

FBS 5-5 GY - Plug-in bridge

3038998

<https://www.phoenixcontact.com/pc/products/3038998>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: gray



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 10-5 GY - Plug-in bridge

3039007

<https://www.phoenixcontact.com/pc/products/3039007>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 24 A

FBS 20-5 GY - Plug-in bridge

3038671

<https://www.phoenixcontact.com/pc/products/3038671>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: gray



 Max. current carrying capacity: 24 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBS 50-5 GY - Plug-in bridge

3032127

<https://www.phoenixcontact.com/pc/products/3032127>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: gray

 Max. current carrying capacity: 24 A

FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/pc/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/pc/products/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/pc/products/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/pc/products/3001593>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red



 Max. current carrying capacity: 17.5 A

FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/pc/products/3033710>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red



 Max. current carrying capacity: 17.5 A

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

D-STIO 2,5/3 - End cover

3209112

<https://www.phoenixcontact.com/pc/products/3209112>

End cover, depth: 36.8 mm, width: 2.2 mm, height: 74.9 mm, color: gray



ST-IL - Mounting material

3039900

<https://www.phoenixcontact.com/pc/products/3039900>

Operating decal for the ST terminal block



STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/pc/products/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



CEC 2,5 - Filler plug

3062757

<https://www.phoenixcontact.com/pc/products/3062757>

Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm



STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

WST 2,5 - Warning cover

3030941

<https://www.phoenixcontact.com/pc/products/3030941>

Warning cover, 5-pos., for terminal width: 5.2 mm



BST 2,5 - Group cover marker

3061282

<https://www.phoenixcontact.com/pc/products/3061282>

Cover for actuation shaft, 5-pos., for spring-cage terminal blocks with width of 5.2 mm



STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>


DIN rail end piece, for DIN rail NS 35/7.5



ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/pc/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block




3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/pc/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/pc/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block




3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/pc/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/pc/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block




3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/pc/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/pc/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/pc/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/pc/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/pc/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/pc/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/pc/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/pc/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/pc/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

ZBF 5 CUS - Zack Marker strip, flat

0825025

<https://www.phoenixcontact.com/pc/products/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/pc/products/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/pc/products/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/pc/products/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/pc/products/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

UC-TMF 5 - Marker for terminal blocks

0818153

<https://www.phoenixcontact.com/pc/products/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

UC-TMF 5 CUS - Marker for terminal blocks

0824638

<https://www.phoenixcontact.com/pc/products/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

UCT-TMF 5 - Marker for terminal blocks

0828744

<https://www.phoenixcontact.com/pc/products/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

UCT-TMF 5 CUS - Marker for terminal blocks

0829658

<https://www.phoenixcontact.com/pc/products/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

STIO 2,5/3-PE/B/L-LA24RD/O-M - Installation ground terminal block



3209138

<https://www.phoenixcontact.com/pc/products/3209138>

E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/pc/products/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

STIO-IN 2,5/3-PE OG - Installation ground terminal block

3209086

<https://www.phoenixcontact.com/pc/products/3209086>



Installation ground terminal block, nom. voltage: 250 V, nominal current: 30 A, number of connections: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: orange

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com