


# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Knife-disconnect terminal block, nom. voltage: 400 V, nominal current: 16 A, 1st and 2nd level, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- The compact design and front connection enable wiring in a confined space
- Clear identification of the disconnect point, thanks to color highlighting
- Convenient separation of circuits, thanks to lever-type disconnect knife

## Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 3210251            |
| Packing unit                         | 50 pc              |
| Minimum order quantity               | 50 pc              |
| Product key                          | BE2231             |
| Catalog page                         | Page 80 (C-1-2019) |
| GTIN                                 | 4046356863261      |
| Weight per piece (including packing) | 17.636 g           |
| Weight per piece (excluding packing) | 17.636 g           |
| Customs tariff number                | 85369010           |
| Country of origin                    | PL                 |

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Technical data

### Product properties

|                       |                           |
|-----------------------|---------------------------|
| Product type          | Disconnect terminal block |
| Number of connections | 4                         |
| Number of rows        | 2                         |
| Potentials            | 2                         |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 04 |
|------------------|----|

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.77 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Number of connections per level | 2                   |
| Nominal cross section           | 2.5 mm <sup>2</sup> |

### 1st and 2nd level

|                                                                                           |                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Stripping length                                                                          | 8 mm ... 10 mm                                        |
| Internal cylindrical gage                                                                 | A3                                                    |
| Connection in acc. with standard                                                          | IEC 60947-7-1                                         |
| Conductor cross section rigid                                                             | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Cross section AWG                                                                         | 26 ... 12 (converted acc. to IEC)                     |
| Conductor cross section flexible                                                          | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Conductor cross section, flexible [AWG]                                                   | 26 ... 14 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup>                                   |
| Nominal current                                                                           | 16 A                                                  |
| Maximum load current                                                                      | 16 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal voltage                                                                           | 400 V                                                 |
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                                   |
| Cross section AWG                                                                         | 26 ... 12 (converted acc. to IEC)                     |

### 1st and 2nd level Connection cross sections directly pluggable

|                                                                   |                                              |
|-------------------------------------------------------------------|----------------------------------------------|
| Conductor cross section rigid                                     | 0.34 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 5.2 mm  |
| End cover width    | 0.8 mm  |
| Height             | 92.4 mm |
| Depth              | 45.8 mm |
| Depth on NS 35/7,5 | 47.4 mm |
| Depth on NS 35/15  | 54.9 mm |

## Material specifications

|                                                                         |                 |
|-------------------------------------------------------------------------|-----------------|
| Color                                                                   | gray (RAL 7042) |
| Flammability rating according to UL 94                                  | V0              |
| Insulating material group                                               | I               |
| Insulating material                                                     | PA              |
| Static insulating material application in cold                          | -60 °C          |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C          |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C          |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3     |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 27,5 MJ/kg      |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed          |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed          |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed          |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV      |
| Result                | Test passed |

### Temperature-rise test

|                                                  |                                     |
|--------------------------------------------------|-------------------------------------|
| Requirement temperature-rise test                | Increase in temperature $\leq 45$ K |
| Result                                           | Test passed                         |
| Short-time withstand current 2.5 mm <sup>2</sup> | 0.3 kA                              |
| Result                                           | Test passed                         |

### Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV     |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35       |
| Test force setpoint     | 1 N         |
| Result                  | Test passed |

### Test for conductor damage and slackening

|                                |                               |
|--------------------------------|-------------------------------|
| Rotation speed                 | 10 rpm                        |
| Revolutions                    | 135                           |
| Conductor cross section/weight | 0.14 mm <sup>2</sup> / 0.2 kg |
|                                | 2.5 mm <sup>2</sup> / 0.7 kg  |
|                                | 4 mm <sup>2</sup> / 0.9 kg    |
| Result                         | Test passed                   |

## Environmental and real-life conditions

### Aging

|                    |             |
|--------------------|-------------|
| Temperature cycles | 192         |
| Result             | Test passed |

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |                                                |
|------------------------|------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03            |
| Spectrum               | Service life test category 2, bogie-mounted    |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level              | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz      |
| Acceleration           | 3.12g                                          |
| Test duration per axis | 5 h                                            |
| Test directions        | X-, Y- and Z-axis                              |
| Result                 | Test passed                                    |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 30g                                 |
| Shock duration                 | 18 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations


|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

## Drawings

Circuit diagram

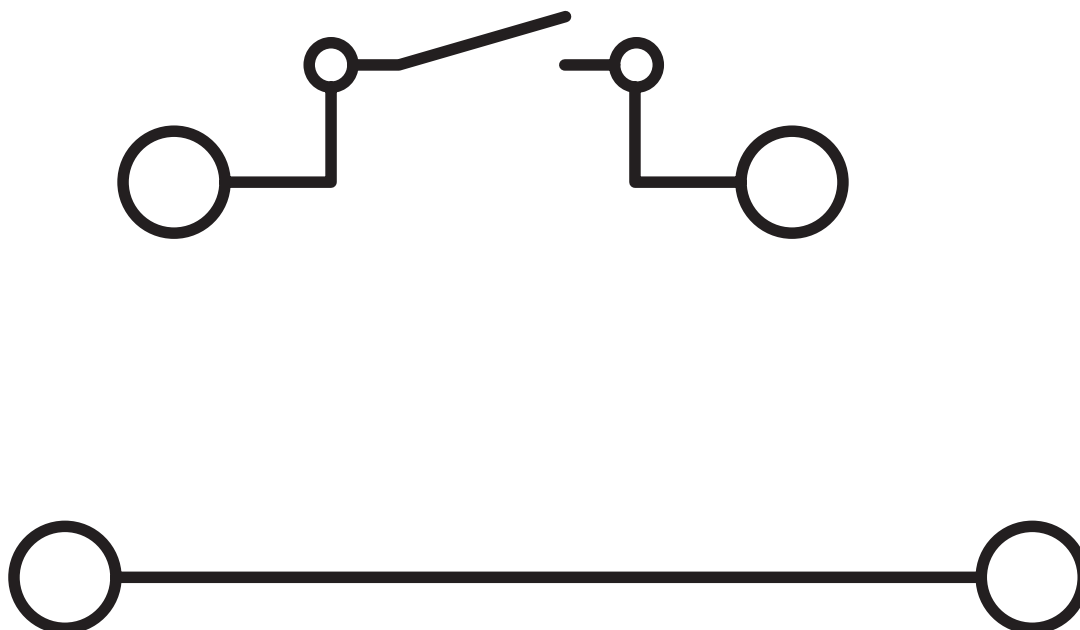

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3210251>

|                                                                                                                      |                       |                       |                   |                             |
|----------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>CSA</b><br>Approval ID: 2030668 |                       |                       |                   |                             |
|                                                                                                                      | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                          |                       |                       |                   |                             |
|                                                                                                                      | 300 V                 | 16 A                  | 26 - 12           | -                           |
| Use group C                                                                                                          |                       |                       |                   |                             |
|                                                                                                                      | 300 V                 | 16 A                  | 26 - 12           | -                           |

|                                                                                                                                   |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>EAC</b><br>Approval ID: RU C-DE.BL08.B.00644 |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|                                                                                                                                    |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>cULus Recognized</b><br>Approval ID: E60425 |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|                                                                                                                                    |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>cULus Recognized</b><br>Approval ID: E60425 |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141126 |
| ECLASS-12.0 | 27141126 |
| ECLASS-13.0 | 27250108 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000902 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# PTT 2,5-L/MT - Knife-disconnect terminal block



3210251

<https://www.phoenixcontact.com/pc/products/3210251>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)