

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: green-yellow

Your advantages

- Large-surface labeling option
- The Push-in technology COMBI plugs for self-assembly provide solutions that users can implement themselves
- Tested for railway applications

Commercial data

Item number	3211971
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE22
Product key	BE2244
Catalog page	Page 327 (C-1-2019)
GTIN	4046356482998
Weight per piece (including packing)	5.114 g
Weight per piece (excluding packing)	4.538 g
Customs tariff number	85366990
Country of origin	PL

PP-H 4/ 1-M GNYE - Plug



3211971

<https://www.phoenixcontact.com/us/products/3211971>

Technical data

Product properties

Product type	Terminal plug
Number of positions	1
Pitch	6.2 mm
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	1
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.02 W

Connection data

Number of connections per level	1
Nominal cross section	4 mm ²

1st level connection left

Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	32 A
Maximum load current	32 A (with 6 mm ² conductor cross section)
Nominal voltage	800 V
Nominal cross section	4 mm ²

1st level connection left Connection cross sections directly pluggable

Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 4 mm ²

PP-H 4/ 1-M GNYE - Plug



3211971

<https://www.phoenixcontact.com/us/products/3211971>

Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
--	---

Dimensions

Width	6.2 mm
Height	21 mm
Depth	42.3 mm
Pitch	6.2 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

Mounting

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Assembly instructions

Use of a parallel pressing tool is recommended for easy latching of the COMBI connector and coupling elements for self-assembly


PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>

Drawings

Schematic diagram

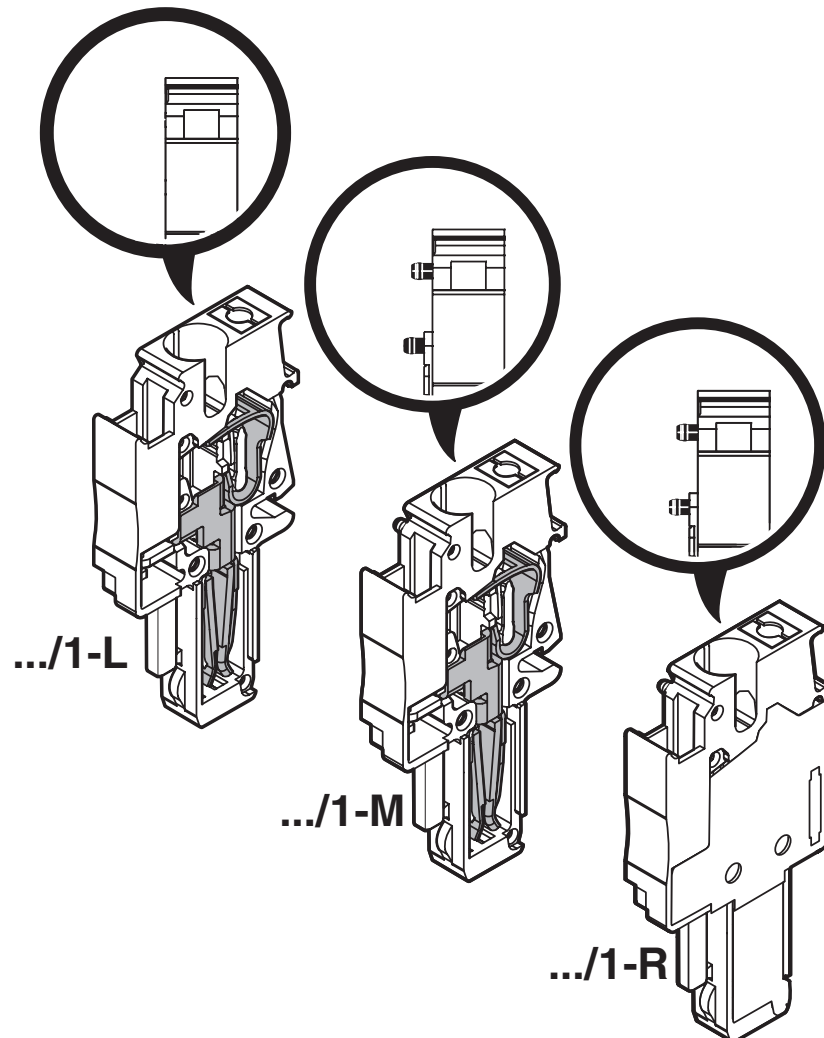

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Circuit diagram



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3211971>

**DNV**
Approval ID: TAE000010T

	IECEE CB Scheme Approval ID: DE1-64672_B1_B2			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	800 V	32 A	-	-

**EAC**
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**
Approval ID: E60425

**BV**
Approval ID: 39979/B0 BV

	VDE Zeichengenehmigung Approval ID: 40043445			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	Only flexible conductors	800 V	32 A	-

**cULus Recognized**
Approval ID: E60425

**cULus Recognized**
Approval ID: E60425

PP-H 4/ 1-M GNYE - Plug



3211971
<https://www.phoenixcontact.com/us/products/3211971>

Classifications

ECLASS

ECLASS-11.0	27141151
ECLASS-12.0	27141151
ECLASS-13.0	27250306

ETIM

ETIM 9.0	EC002021
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Accessories

PR/2 - Latching

3040630

<https://www.phoenixcontact.com/us/products/3040630>



Latching, width: 10 mm, height: 29.8 mm, number of positions: 2, color: orange

PRT/2 - Latching

3040631

<https://www.phoenixcontact.com/us/products/3040631>



Latching, can only be released using a screwdriver, width: 9 mm, height: 23.2 mm, number of positions: 2, color: orange

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PRZ - Latching

3040614

<https://www.phoenixcontact.com/us/products/3040614>



Latching, number of positions: 2, length: 64 mm, color: orange

PZ/2 - Strain relief

3040627

<https://www.phoenixcontact.com/us/products/3040627>



Strain relief, width: 9.3 mm, height: 48.7 mm, number of positions: 2, color: black

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PP-H 4/ 1-L - Plug

3211948

<https://www.phoenixcontact.com/us/products/3211948>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: gray

PP-H 4/ 1-L BU - Plug

3211951

<https://www.phoenixcontact.com/us/products/3211951>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: blue

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PP-H 4/ 1-L GNYE - Plug

3211958

<https://www.phoenixcontact.com/us/products/3211958>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: green-yellow

PP-H 4/ 1-L RD - Plug

3211949

<https://www.phoenixcontact.com/us/products/3211949>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: red

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PP-H 4/ 1-M - Plug

3211965

<https://www.phoenixcontact.com/us/products/3211965>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: gray

PP-H 4/ 1-M BU - Plug

3211964

<https://www.phoenixcontact.com/us/products/3211964>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: blue

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: green-yellow

PP-H 4/ 1-R - Plug

3211977

<https://www.phoenixcontact.com/us/products/3211977>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: gray

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PP-H 4/ 1-R BU - Plug

3211980

<https://www.phoenixcontact.com/us/products/3211980>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: blue

PP-H 4/ 1-R GNYE - Plug

3211987

<https://www.phoenixcontact.com/us/products/3211987>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of connections: 1, number of positions: 1, connection method: Push-in connection, 1st level connection left, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², color: green-yellow

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



PR - Latching

3040559

<https://www.phoenixcontact.com/us/products/3040559>



Latching, width: 4.4 mm, height: 29.8 mm, number of positions: 1, color: orange

ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/us/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/us/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

UC-TMF 6 - Marker for terminal blocks

0818140

<https://www.phoenixcontact.com/us/products/0818140>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



UC-TMF 6 CUS - Marker for terminal blocks

0824646

<https://www.phoenixcontact.com/us/products/0824646>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

UCT-TMF 6 - Marker for terminal blocks

0828746

<https://www.phoenixcontact.com/us/products/0828746>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



UCT-TMF 6 CUS - Marker for terminal blocks

0829665

<https://www.phoenixcontact.com/us/products/0829665>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

<https://www.phoenixcontact.com/us/products/0808749>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/us/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

<https://www.phoenixcontact.com/us/products/0810834>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

<https://www.phoenixcontact.com/us/products/0810876>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



ISH 4/0,5 - Insulating sleeve

3002885

<https://www.phoenixcontact.com/us/products/3002885>

Insulating sleeve, color: gray



PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



ISH 4/1,0 - Insulating sleeve

3002898

<https://www.phoenixcontact.com/us/products/3002898>



Insulating sleeve, color: black

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

PP-H 4/ 1-M GNYE - Plug

3211971

<https://www.phoenixcontact.com/us/products/3211971>



ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/us/products/1207608>

Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com