


# UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Component terminal block, The current and voltage are determined by the LED display used., nom. voltage: 24 V, nominal current: 19 A, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Since function shafts are provided on each level, all potential distribution tasks can be implemented quickly
- For a clear overview, each terminal point supports large-surface labeling
- A very high wiring density is achieved with the compact three-level terminal blocks

## Commercial data

Item number	3214288
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE1174
Product key	BE1174
Catalog page	Page 150 (C-1-2019)
GTIN	4046356575430
Weight per piece (including packing)	25.593 g
Weight per piece (excluding packing)	25.593 g
Customs tariff number	85369010
Country of origin	PL

# UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

## Technical data

### Notes

General	The current and voltage are determined by the LED display used.
---------	---

### Product properties

Product type	Component terminal block
Number of connections	6
Number of rows	3
Potentials	3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W
LED voltage range	15 V DC ... 30 V DC
LED current range	2.5 mA ... 7.5 mA

### Input data

LED voltage range	15 V DC ... 30 V DC
-------------------	---------------------

### Connection data

Number of connections per level	2
Nominal cross section	2.5 mm <sup>2</sup>
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Internal cylindrical gage	A3
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross section AWG	26 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	26 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Nominal current	19 A (with a 2.5 mm <sup>2</sup> conductor cross section)
Maximum load current	24 A (with 4 mm <sup>2</sup> conductor cross section)
Nominal voltage	24 V
Nominal cross section	2.5 mm <sup>2</sup>

### Dimensions

Width	5.2 mm
-------	--------

# UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

End cover width	2.2 mm
Height	90 mm
Depth on NS 35/7,5	77.5 mm
Depth on NS 35/15	85 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Environmental and real-life conditions

### Ambient conditions


Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

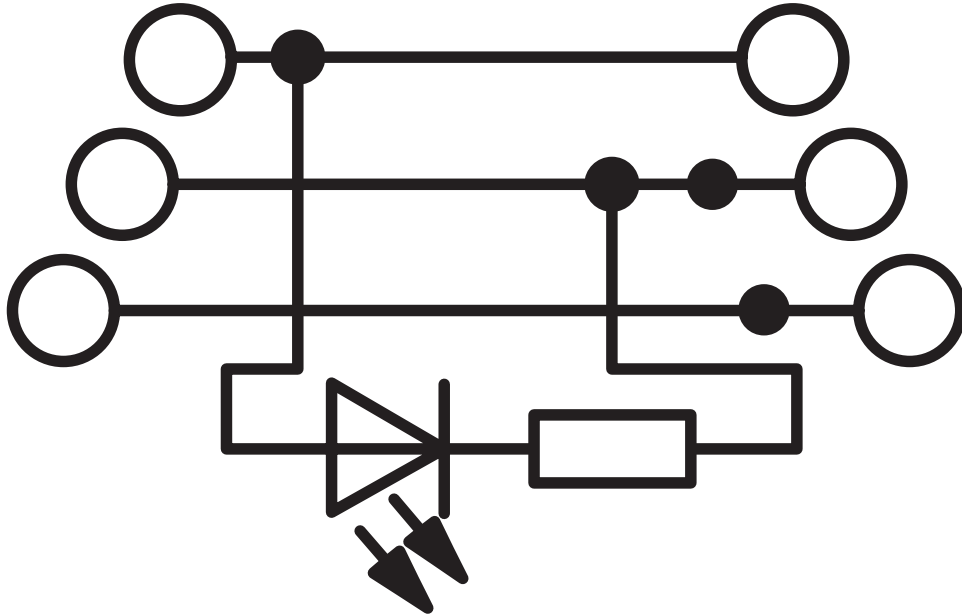

# UT 2,5-3L-LA24RD/O-M - Component terminal block





3214288


<https://www.phoenixcontact.com/au/products/3214288>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3214288>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	24 V	20 A	26 - 12	-
Use group C	24 V	20 A	26 - 12	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	300 V	20 A	26 - 12	-
Use group C	300 V	20 A	26 - 12	-
Use group D	600 V	5 A	26 - 12	-

# UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

## Classifications

### ECLASS

ECLASS-11.0	27141127
ECLASS-12.0	27141127
ECLASS-13.0	27250114

### ETIM

ETIM 9.0	EC000903
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)