

# AB-SKS 60 - Support bracket



3240223

<https://www.phoenixcontact.com/us/products/3240223>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Support bracket for busbars



## Your advantages

- For user-friendly shield connection, especially for single and multi-level terminal blocks and devices with a front connection
- For mounting SK and SKS shield connection clamps
- End bracket function
- Isolated from DIN rail

## Commercial data

Item number	3240223
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE07
Product key	BE7113
Catalog page	Page 571 (C-3-2019)
GTIN	4046356455725
Weight per piece (including packing)	26.1 g
Weight per piece (excluding packing)	25.4 g
Customs tariff number	39269097
Country of origin	DE

# AB-SKS 60 - Support bracket



3240223

<https://www.phoenixcontact.com/us/products/3240223>

## Technical data

### Product properties

Product type	Support bracket
Number of positions	1

### Data management status

Article revision	00
------------------	----

### Electrical properties

Nominal current I <sub>N</sub>	0 A
--------------------------------	-----

### Dimensions

Dimensional drawing	
Width	9.5 mm
Height	97.8 mm
Depth on NS 35/7,5	46.9 mm
Depth on NS 35/15	54.4 mm

### Material specifications

Color	gray (RAL 7042)
Material	PA
Flammability rating according to UL 94	V0
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	120 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

### Mounting

Mounting type	DIN rail mounting
Thread type	()


# AB-SKS 60 - Support bracket

3240223

<https://www.phoenixcontact.com/us/products/3240223>



## Drawings

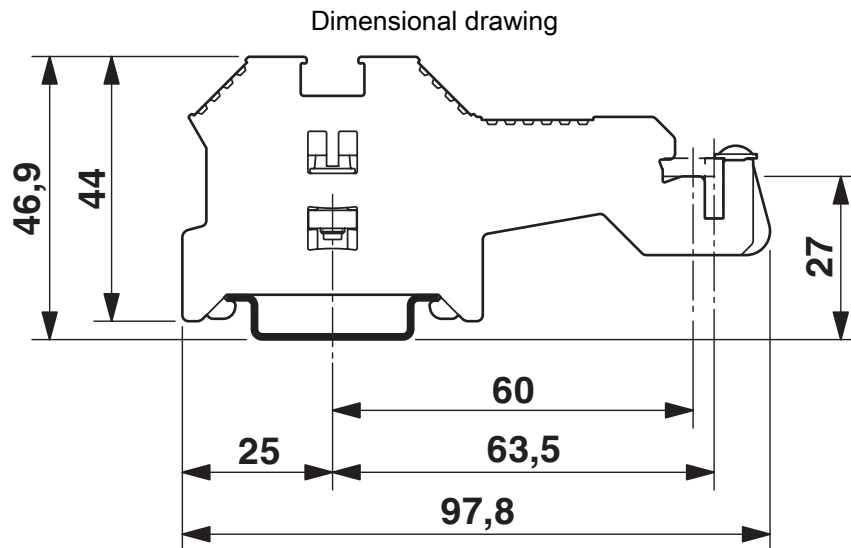

# AB-SKS 60 - Support bracket



3240223

<https://www.phoenixcontact.com/us/products/3240223>

## Classifications

### ECLASS

ECLASS-11.0	27400607
ECLASS-12.0	27400607
ECLASS-13.0	27400607

### ETIM

ETIM 9.0	EC001166
----------	----------

### UNSPSC

UNSPSC 21.0	39121700
-------------	----------

# AB-SKS 60 - Support bracket



3240223

<https://www.phoenixcontact.com/us/products/3240223>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)