

# CD 40X100 - Cable duct

3240294

<https://www.phoenixcontact.com/ca/products/3240294>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable duct for installation and mounting in control cabinets, gray, comprising upper part and mounting base, width: 40 mm, height: 100 mm, length: 2000 mm

## Your advantages

- Predetermined breaking point enables tool-free, burr-free removal of bars
- Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool

## Commercial data

Item number	3240294
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE07
Product key	BE7431
Catalog page	Page 581 (C-3-2019)
GTIN	4046356481359
Weight per piece (including packing)	1,400 g
Weight per piece (excluding packing)	1,400 g
Customs tariff number	39259020
Country of origin	DE

# CD 40X100 - Cable duct

3240294

<https://www.phoenixcontact.com/ca/products/3240294>



## Technical data


### Product properties

Product type	Wiring duct
--------------	-------------

### Connection data

Nominal cross section	2633 mm <sup>2</sup>
-----------------------	----------------------

### Dimensions

Dimensional drawing	
Width	40 mm
Height	2000 mm
Depth	100 mm
Length	2000 mm

### Material specifications

Color	gray
Material	PVC
Flammability rating according to UL 94	V0
Components	Lead-free

### Cable/line

Halogen-free	no
--------------	----

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-5 °C ... 60 °C
---------------------------------	-----------------

# CD 40X100 - Cable duct


3240294

<https://www.phoenixcontact.com/ca/products/3240294>



## Drawings

Dimensional drawing

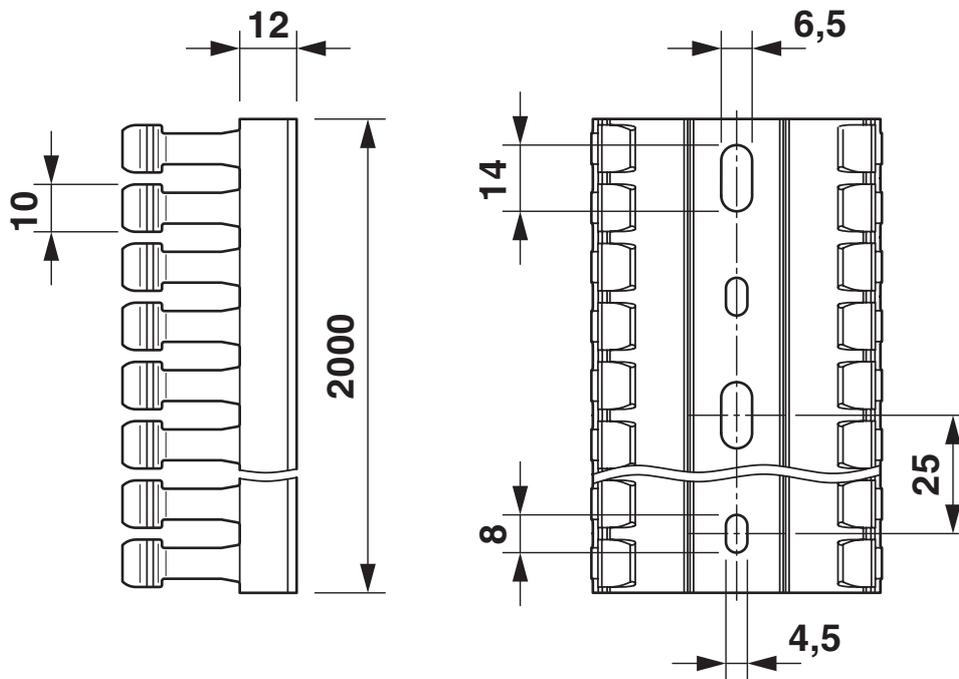

Base perforation according to DIN EN 50085

# CD 40X100 - Cable duct



3240294

<https://www.phoenixcontact.com/ca/products/3240294>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/3240294>



**CSA**

Approval ID: 248269



**UL Recognized**

Approval ID: FILE E 328576



**VDE Zeichengenehmigung**

Approval ID: 40027969



**EAC**

Approval ID: RU C-DE.PB68.W.00478

# CD 40X100 - Cable duct

3240294

<https://www.phoenixcontact.com/ca/products/3240294>



## Classifications

### ECLASS

ECLASS-11.0	27400703
ECLASS-12.0	27400703
ECLASS-13.0	27400703

### ETIM

ETIM 9.0	EC000012
----------	----------

### UNSPSC

UNSPSC 21.0	39131700
-------------	----------

# CD 40X100 - Cable duct



3240294

<https://www.phoenixcontact.com/ca/products/3240294>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
8240 Parkhill Drive  
Milton, Ontario L9T 5V7  
1-800-890-2820  
[cdinfo@phoenixcontact.ca](mailto:cdinfo@phoenixcontact.ca)