

https://www.phoenixcontact.com/us/products/3240309



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable duct for installation and mounting in control cabinets, blue, comprising upper part and mounting base, width: 40 mm, height: 40 mm, length: 2000 mm

Your advantages

- · Predetermined breaking point enables tool-free, burr-free removal of bars
- · Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- · Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- · The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- · Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- · Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool

Commercial data

Item number	3240309
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BE74
Product key	BE7432
Catalog page	Page 581 (C-3-2019)
GTIN	4046356507899
Weight per piece (including packing)	760 g
Weight per piece (excluding packing)	760 g
Customs tariff number	39259020
Country of origin	DE



https://www.phoenixcontact.com/us/products/3240309



Technical data

Product properties

	Product type	Wiring duct
Сс	onnection data	
	Nominal cross section	749 mm²

Dimensions

Dimensional drawing	9.5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Width	40 mm
Height	2000 mm
Depth	40 mm
Length	2000 mm

Material specifications

Color	blue
Material	PVC
Flammability rating according to UL 94	V0
Components	Lead-free

Cable/line

Halogen-free	no

Environmental and real-life conditions

Ambient conditions


Ambient temperature (operation)	-5 °C 60 °C
---------------------------------	-------------

3240309

https://www.phoenixcontact.com/us/products/3240309



Drawings

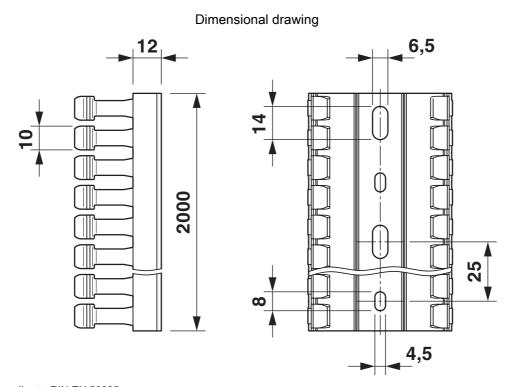

Base perforation according to DIN EN 50085



https://www.phoenixcontact.com/us/products/3240309



Approvals

🎨 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3240309



Approval ID: 248269



UL Recognized

Approval ID: FILE E 328576



VDE Zeichengenehmigung Approval ID: 40027969



EAC

Approval ID: RU C-DE.PB68.W.00478



https://www.phoenixcontact.com/us/products/3240309



Classifications

UNSPSC 21.0

ECLASS

	ECLASS-11.0	27400703
	ECLASS-12.0	27400703
	ECLASS-13.0	27400703
ETIM		
	ETIM 9.0	EC000012
UNSPSC		

39131700

3240309

https://www.phoenixcontact.com/us/products/3240309



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com