

https://www.phoenixcontact.com/pc/products/3240355



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable duct for installation and mounting in control cabinets, light gray, halogen-free, comprising upper part and mounting base, width: 60 mm, height: 100 mm, length: 2000 mm

Your advantages

- · Predetermined breaking point enables tool-free, burr-free removal of bars
- · Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- · Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- · The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- · Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- · Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool

Commercial data

Item number	3240355
Packing unit	12 pc
Minimum order quantity	12 pc
Product key	BE7441
Catalog page	Page 579 (C-3-2019)
GTIN	4046356508407
Weight per piece (including packing)	1,500 g
Weight per piece (excluding packing)	1,500 g
Customs tariff number	39259020
Country of origin	DE



https://www.phoenixcontact.com/pc/products/3240355



Technical data

Product properties

Product type	Wiring duct	
Data management status		
Article revision	04	

Connection data

Nominal cross section	4239 mm²

Dimensions

Dimensional drawing	9.5
Width	60 mm
Height	2000 mm
Depth	100 mm
Length	2000 mm

Material specifications

Color	light grey RAL 7035
Material	PC/ABS
Flammability rating according to UL 94	VO
Components	halogen-free

Cable/line

Hologon from	VAS 2AV
Halogen-free	yes

Environmental and real-life conditions

Ambient conditions


Ambient temperature (operation)	-40 °C 90 °C

3240355

https://www.phoenixcontact.com/pc/products/3240355



Drawings

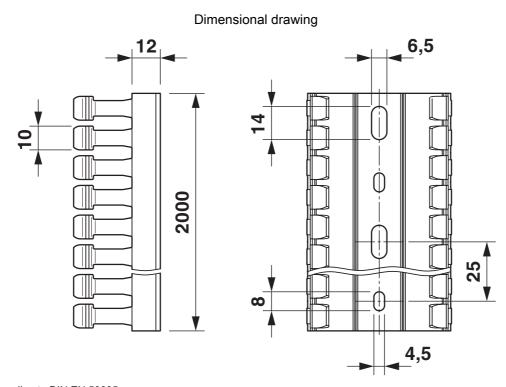

Base perforation according to DIN EN 50085



https://www.phoenixcontact.com/pc/products/3240355



Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/3240355



VDE Zeichengenehmigung

Approval ID: 40058453



cULus Recognized

Approval ID: E328576



cCSAus

Approval ID: 80202282



https://www.phoenixcontact.com/pc/products/3240355



Classifications

UNSPSC 21.0

ECLASS

	ECLASS-11.0	27400703
	ECLASS-12.0	27400703
	ECLASS-13.0	27400703
ETIM		
	ETIM 9.0	EC000012
UNSPSC		

39131700



https://www.phoenixcontact.com/pc/products/3240355



Environmental product compliance

EU RoHS	
---------	--

Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	



https://www.phoenixcontact.com/pc/products/3240355



Accessories

CD-HF COVER 60 - Cover profile

3240372

https://www.phoenixcontact.com/pc/products/3240372



Cover for cable duct, light gray, halogen-free, width: 60 mm, length: 2000 mm

RVT-PA 4 - Fastening clip

3240498

https://www.phoenixcontact.com/pc/products/3240498



Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 \dots 6 mm



https://www.phoenixcontact.com/pc/products/3240355



RVT-PA 6 - Fastening clip

3240499

https://www.phoenixcontact.com/pc/products/3240499



Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 \dots 6 mm

UNIFOX-RVT P 4 - Tool

1212478

https://www.phoenixcontact.com/pc/products/1212478



Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets



https://www.phoenixcontact.com/pc/products/3240355



UNIFOX-RVT P 6 - Tool

1212509

https://www.phoenixcontact.com/pc/products/1212509



Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com