

https://www.phoenixcontact.com/pc/products/3240625



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable duct for installation and mounting in control cabinets, white, comprising upper part and mounting base, width: 40 mm, height: 60 mm, length: 2000 mm

## Your advantages

- · Predetermined breaking point enables tool-free, burr-free removal of bars
- · Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- · Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- · The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- · Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- · Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool

### Commercial data

Item number	3240625
Packing unit	20 pc
Minimum order quantity	20 pc
Product key	BE7433
Catalog page	Page 581 (C-3-2019)
GTIN	4046356629416
Weight per piece (including packing)	870 g
Weight per piece (excluding packing)	870 g
Customs tariff number	39259020
Country of origin	DE



https://www.phoenixcontact.com/pc/products/3240625



## Technical data

### Product properties

	Product type	Wiring duct
Со	onnection data	
	Nominal cross section	1404 mm²

### **Dimensions**

Dimensional drawing	9.5
Width	40 mm
Height	2000 mm
Depth	60 mm
Length	2000 mm

## Material specifications

Color	white
Material	PVC
Flammability rating according to UL 94	V0
Components	Lead-free

### Cable/line

Halogen-free	no

### Environmental and real-life conditions

#### Ambient conditions


Ambient temperature (operation)	-5 °C 60 °C
---------------------------------	-------------

3240625

https://www.phoenixcontact.com/pc/products/3240625



# Drawings

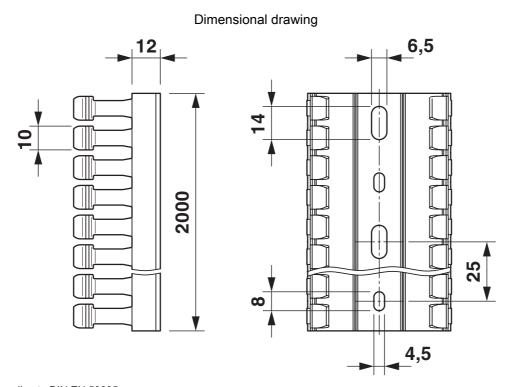

Base perforation according to DIN EN 50085



3240625

https://www.phoenixcontact.com/pc/products/3240625

## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/3240625



Approval ID: 248269



**UL Recognized** 

Approval ID: FILE E 328576



**VDE Zeichengenehmigung** Approval ID: 40027969



**EAC** 

Approval ID: RU C-DE.PB68.W.00478



3240625

https://www.phoenixcontact.com/pc/products/3240625

# Classifications

UNSPSC 21.0

### **ECLASS**

ECLASS-11.0	27400703	
ECLASS-12.0	27400703	
ECLASS-13.0	27400703	
ETIM		
ETIM 9.0	EC000012	
UNSPSC		

39131700



https://www.phoenixcontact.com/pc/products/3240625



## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com