

# AI 0,75-8 WH-B 3000 - Ferrule



3240677

<https://www.phoenixcontact.com/us/products/3240677>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ferrule, sleeve length: 8 mm, color: white



## Commercial data

Item number	3240677
Packing unit	3,000 pc
Minimum order quantity	3,000 pc
Sales key	BH34
Product key	BH3414
Catalog page	Page 487 (C-3-2019)
GTIN	4046356638265
Weight per piece (including packing)	0.1 g
Weight per piece (excluding packing)	0.092 g
Customs tariff number	85369010
Country of origin	DE

# AI 0,75-8 WH-B 3000 - Ferrule



3240677

<https://www.phoenixcontact.com/us/products/3240677>

## Technical data

### Product properties


Product type	Cable end sleeve
Conductor category	stranded conductors, class 2, 5, 6 / B, C, K, M

### Connection data

#### Conductor connection

Conductor cross section flexible max.	0.75 mm²
Conductor cross section AWG max.	18
Stripping length	11 mm

### Dimensions

Dimensional drawing	
Sleeve length	8 mm
Maximum stripping length	11 mm
Ferrule diameter	1.3 mm
Sleeve wall thickness	0.15 mm
Insulating collar thickness	0.25 mm
Inner dimensions of the insulating collar	2.8 mm

### Material specifications

Color	white
Material	CU-DHP
Flammability rating according to UL 94	HB
Coating	tin-plated (galvanic)
Components	free from silicone and halogen

### Mechanical properties

#### Technical data

Sleeve length	8 mm
---------------	------

### Environmental and real-life conditions

#### Ambient conditions

Permanent temperature	105 °C (-40 °C no load / 0 °C dynamic load)
Short-term temperature	120 °C

### Standards and regulations

# AI 0,75-8 WH-B 3000 - Ferrule



3240677

<https://www.phoenixcontact.com/us/products/3240677>

Design according to standard	Special color
------------------------------	---------------

# AI 0,75-8 WH-B 3000 - Ferrule


3240677

<https://www.phoenixcontact.com/us/products/3240677>



## Drawings

Dimensional drawing

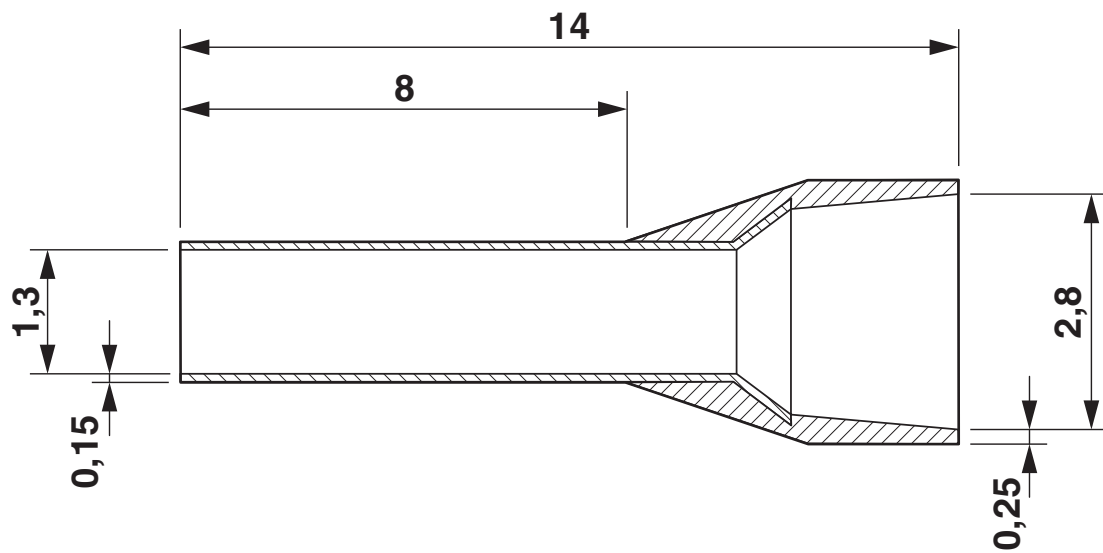

# AI 0,75-8 WH-B 3000 - Ferrule



3240677

<https://www.phoenixcontact.com/us/products/3240677>

## Classifications

### ECLASS

ECLASS-11.0	27400201
ECLASS-13.0	27400201
ECLASS-12.0	27400201

### ETIM

ETIM 9.0	EC000005
----------	----------

### UNSPSC

UNSPSC 21.0	27121700
-------------	----------

# AI 0,75-8 WH-B 3000 - Ferrule



3240677

<https://www.phoenixcontact.com/us/products/3240677>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

# AI 0,75-8 WH-B 3000 - Ferrule

3240677

<https://www.phoenixcontact.com/us/products/3240677>



## Mandatory accessories

### CF 3000-2,5 - Electrical crimping tool

1205477

<https://www.phoenixcontact.com/us/products/1205477>



Automatic stripping and crimping device, 230 V version, for taped insulated ferrules 0.25 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, sleeve length 8 mm, incl. 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup> conversion kits

---

### CF 3000-2,5 120V - Electrical crimping tool

1205516

<https://www.phoenixcontact.com/us/products/1205516>



Automatic stripping and crimping device, 120 V version, for taped insulated ferrules 0.25 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, sleeve length 8 mm, incl. 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup> conversion kits

---

## Accessories

# AI 0,75-8 WH-B 3000 - Ferrule

3240677

<https://www.phoenixcontact.com/us/products/3240677>



## CRIMPFOX CENTRUS 6H - Crimping pliers

1213146

<https://www.phoenixcontact.com/us/products/1213146>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

---

## CRIMPFOX CENTRUS 10H - Crimping pliers

1213156

<https://www.phoenixcontact.com/us/products/1213156>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 10 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection



# AI 0,75-8 WH-B 3000 - Ferrule

3240677

<https://www.phoenixcontact.com/us/products/3240677>



## CRIMPFOX 6H - Crimping pliers

1212046

<https://www.phoenixcontact.com/us/products/1212046>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, unlockable pressure lock, lateral entry

---

## CRIMPFOX 6-M - Crimping pliers

1212720

<https://www.phoenixcontact.com/us/products/1212720>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

# AI 0,75-8 WH-B 3000 - Ferrule

3240677

<https://www.phoenixcontact.com/us/products/3240677>



## CRIMPFOX 6T - Crimping pliers

1212037

<https://www.phoenixcontact.com/us/products/1212037>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

## CRIMPFOX 6S-F - Crimping pliers

1212043

<https://www.phoenixcontact.com/us/products/1212043>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.5 mm<sup>2</sup> ... 6 mm<sup>2</sup>, front entry, square crimp

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)