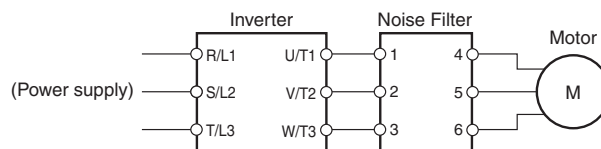



Output Noise Filter 3G3AX-NFO□□


Reduces noise generated by the Inverter. Connect as close to the Inverter as possible.

●Connection Example**●Specifications**


Power supply	Model	Rated current (A)	Applicable motor (kW)		External Dimensions (H X W X D) (mm)	Weight (kg)
			200 V class	400 V class		
3-phase, 3-wire Rated voltage 500 VAC	3G3AX-NFO01	6	to 0.75	to 2.2	156 × 95 × 50	0.7
	3G3AX-NFO02	12	1.5, 2.2	3.7	176 × 110 × 70	0.9
	3G3AX-NFO03	25	3.7, 5.5	5.5, 7.5	154 × 160 × 120	2.1
	3G3AX-NFO04	50	7.5	---	210 × 200 × 150	3.7

●Dimensions (Unit: mm)

**3G3AX-NFO01
3G3AX-NFO02**

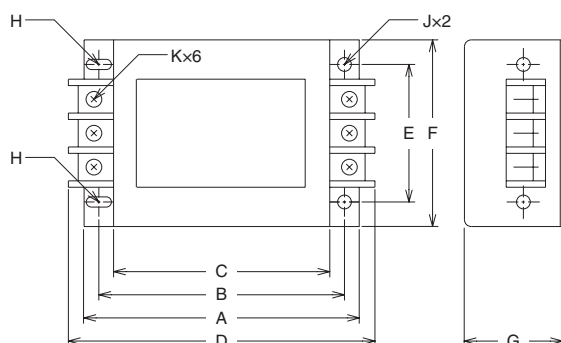

**3G3AX-NFO03/3G3AX-NFO04/3G3AX-NFO05
3G3AX-NFO06/3G3AX-NFO07**

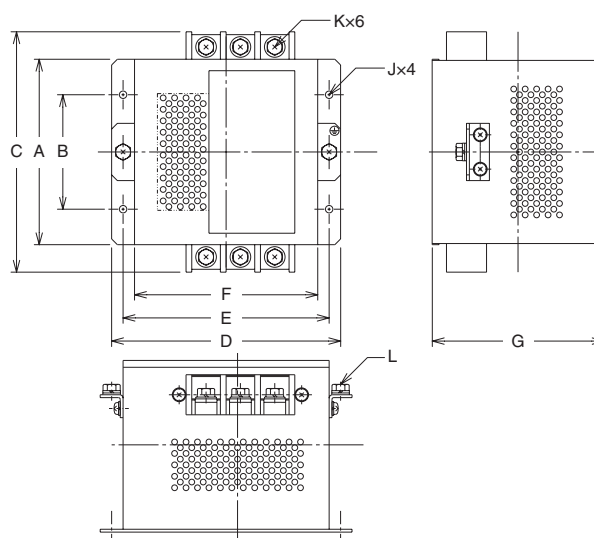

Model	A	B	C	D	E	F	G	H	J	K	L
3G3AX-NFO01	140	125	110	156	70	95	50	R: 2.25mm Length: 6mm	4.5 dia. mm	M4	---
3G3AX-NFO02	160	145	130	176	80	110	70	R: 2.75mm Length: 7mm	5.5 dia. mm	M4	---
3G3AX-NFO03	112	80	154	160	145	130	120	---	6.5 dia. mm	M4	---
3G3AX-NFO04	162	100	210	200	180	160	150	---	6.5 dia. mm	M5	M5