

SETRON, Switch disconnecter 3LD, emergency switching-off switch, 3-pole, Iu: 63 A, operating power / at AC-23 A 400 V: 22 kW, installation in distribution boards, knob-operated mechanism, Red / yellow, handle direct at the switch

| Model | |
|---|-------------------------------------|
| product brand name | SETRON |
| product designation | 3LD Switch disconnecter |
| design of the product | EMERGENCY-STOP switch |
| display version for switch position indicator manual operation | 1 ON - 0 OFF |
| type of switch | DIN-rail mounting |
| design of the actuating element | selector switch |
| color of the actuating element | red |
| design of handle | knob-operated mechanism, red/yellow |
| type of the driving mechanism motor drive | No |
| General technical data | |
| number of poles | 3 |
| size of switch disconnecter | 3 |
| mechanical service life (operating cycles) typical | 100 000 |
| electrical endurance (operating cycles) | |
| • at AC-23 A at 690 V | 6 000 |
| operating frequency maximum | 50 1/h |
| degree of pollution | 3 |
| Voltage | |
| insulation voltage rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| operating voltage | |
| • at AC rated value | 690 V |
| operating frequency rated value | |
| • minimum | 50 Hz |
| • maximum | 60 Hz |
| Protection class | |
| protection class IP | IP40 |
| protection class IP on the front | IP40 |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 4.5 W |
| Current | |
| operational current rated value | 63 A |
| operational current | |
| • at 40 °C rated value | 63 A |
| • at 45 °C rated value | 63 A |
| • at 50 °C rated value | 63 A |
| • at 55 °C rated value | 63 A |
| • at AC rated value | 63 A |

| | |
|---|-----------------------|
| Main circuit | |
| operational current | |
| • at AC-21 at 690 V rated value | 63 A |
| • at AC-21 A at 240 V rated value | 63 A |
| • at AC-21 A at 400 V rated value | 63 A |
| • at AC-21 A at 440 V rated value | 63 A |
| • at AC-23 A at 400 V rated value | 43 A |
| operating power | |
| • at AC-23 A at 240 V rated value | 11 kW |
| • at AC-23 A at 400 V rated value | 22 kW |
| • at AC-23 A at 440 V rated value | 22 kW |
| • at AC-23 A at 690 V rated value | 19 kW |
| • at AC-3 at 240 V rated value | 11 kW |
| • at AC-3 at 400 V rated value | 19 kW |
| • at AC-3 at 690 V rated value | 15 kW |
| Auxiliary circuit | |
| number of CO contacts for auxiliary contacts | 0 |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| operating voltage of auxiliary contacts at AC maximum | 500 V |
| continuous current of the auxiliary contact rated value | 10 A |
| insulation voltage of the auxiliary switch rated value | 500 V |
| Suitability | |
| suitability for use | |
| • main switch | Yes |
| • switch disconnecter | Yes |
| • EMERGENCY OFF switch | Yes |
| • safety switch | Yes |
| • maintenance/repair switch | Yes |
| Product details | |
| product feature can be locked into OFF position | Yes |
| accessories | |
| product extension optional | |
| • motor drive | No |
| • voltage trigger | No |
| number of connectable NC contacts for auxiliary contacts attachable maximum | 2 |
| number of connectable NO contacts for auxiliary contacts attachable maximum | 4 |
| number of connectable CO contacts for auxiliary contacts attachable maximum | 0 |
| number of bracket locks maximum | 2 |
| hasp thickness of the bracket locks | 4 ... 6 mm |
| Short circuit | |
| conditional short-circuit current with line-side fuse protection | |
| • at 690 V by gG fuse rated value | 50 kA |
| let-through current with closed switch | |
| • at 240 V for combination switch + gG fuse maximum | 6 kA |
| • at 440 V for combination switch + gG fuse maximum | 6 kA |
| • at 690 V for combination switch + gG fuse maximum permissible | 6 kA |
| I ² t value with closed switch | |
| • at 240 V for combination switch + gG fuse maximum | 21 kA ² .s |
| • at 440 V for combination switch + gG fuse maximum | 21 kA ² .s |
| • at 690 V for combination switch + gG fuse maximum | 21 kA ² .s |
| design of the fuse link | |
| • for short-circuit protection of the main circuit required | fuse gL/gG: 63 A |
| • for short-circuit protection of the auxiliary switch required | fuse gL/gG: 10 A |
| operational current of upstream fuse rated value | 63 A |
| according UL | |

| | |
|--|-------|
| operational current at AC according to UL 508/UL 60947-4-1 rated value | 63 A |
| operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value | 600 V |
| active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value | 40 |
| active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value | 50 |
| short-time withstand current (SCCR) at 600 V according to UL 508/UL 60947-4-1 | 5 kA |
| continuous current of upstream fuse according to UL rated value | 175 A |
| type of fuse according to UL | RK5 |

Connections

| | |
|---|--|
| AWG number as coded connectable conductor cross section solid | |
| <ul style="list-style-type: none"> • maximum • minimum | 6 14 |
| type of connectable conductor cross-sections for copper conductor | |
| <ul style="list-style-type: none"> • solid • finely stranded with core end processing • stranded | 1x (2,5...35mm ²) 1x (2.5...16 mm ²) 1x (2,5...35mm ²) |
| type of connectable conductor cross-sections for auxiliary contacts | |
| <ul style="list-style-type: none"> • solid • finely stranded with core end processing • stranded | 2x (0.75 ... 2.5 mm ²), 1x 4 mm ² 2x (0.75 ... 1.5 mm ²), 1x 2.5 mm ² 2x (0.75 ... 2.5 mm ²), 1x 4 mm ² |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary contacts | box terminal connection terminals |

Mechanical Design

| | |
|--|-------------------------------------|
| height | 64 mm |
| width | 64 mm |
| depth | 93 mm |
| type of device | fixed mounting |
| fastening method | Built-in unit fixed-mounted version |
| fastening method | |
| <ul style="list-style-type: none"> • 4-hole front mounting • front mounting with central attachment • rail mounting | No No Yes |
| net weight | 304 g |

Environmental conditions

| | |
|--|-----------------|
| ambient temperature during operation | |
| <ul style="list-style-type: none"> • minimum • maximum | -25 °C 55 °C |
| ambient temperature during storage | |
| <ul style="list-style-type: none"> • minimum • maximum | -25 °C 55 °C |

General Product Approval



[Confirmation](#)



[Miscellaneous](#)

| General Product Approval | Declaration of Conformity | Test Certificates | Marine / Shipping | other |
|--------------------------|---------------------------|-------------------|-------------------|-------|
|--------------------------|---------------------------|-------------------|-------------------|-------|



[Special Test Certificate](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2530-0TK13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD2530-0TK13>

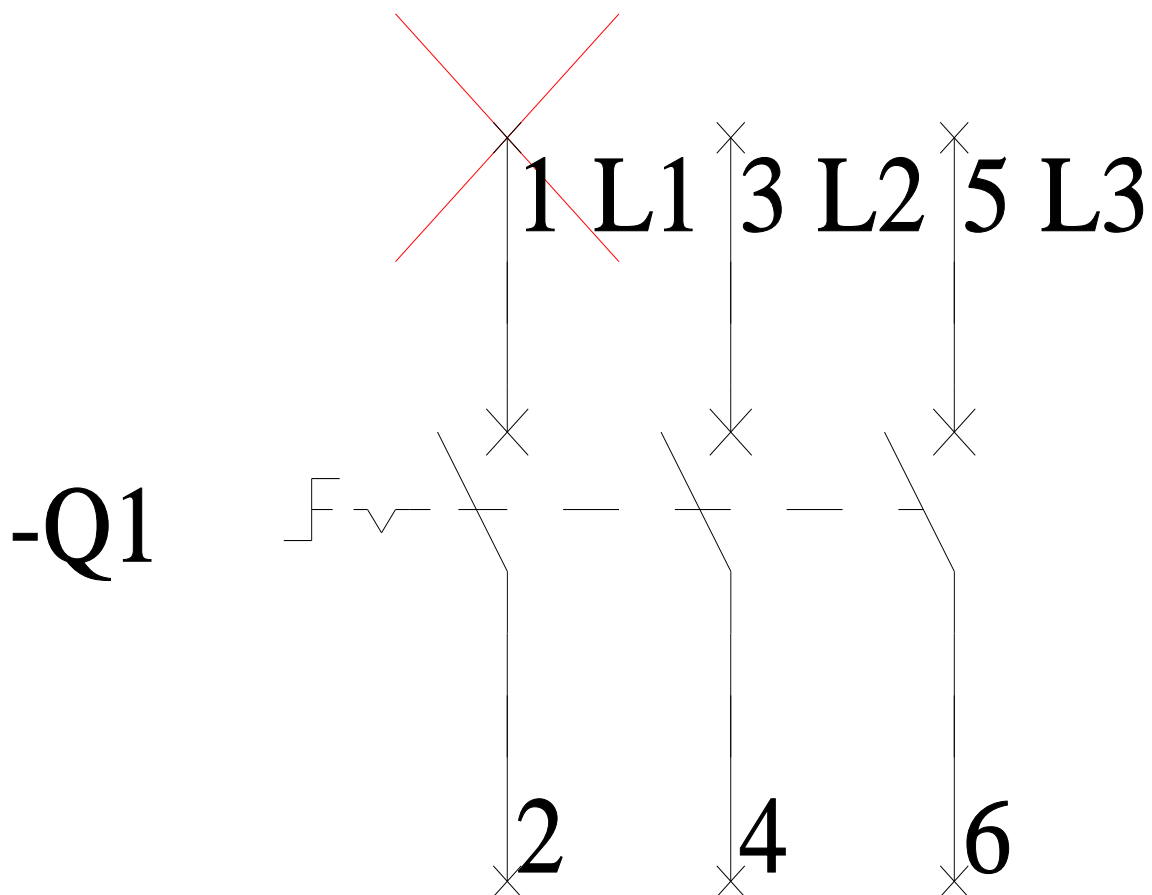
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD2530-0TK13

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

-CI

