SIEMENS

Product data sheet 3NA3240



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 2, 200A, AC 500V/DC 440V

Similar to image

| T. 1. 2. 1. 4. | | |
|--|----|--|
| Technical data: | | |
| Current / for AC / rated value | Α | 200 |
| Operating class of the fuse link | | gG |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | NH2 |
| Supply voltage | | |
| • for AC / rated value | V | 500 |
| • for DC | V | 440 |
| Switching capacity current | | |
| • in accordance with IEC 60947-2 / rated value | kA | 120 |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25 |
| Design of an identification indicator | | Front indicators |
| type of the assembly | | Non-insulated grip lugs |
| Protection class IP | | IP20, with connected conductors |
| Climatic class | | -20 to +50 at 95% relative humidity |
| Ambient temperature | | |
| • minimum | °C | -5 |
| • maximum | °C | 40 |
| Product description | | Using screw adapter or adapter sleeves |

Certificates/approvals:

General Product Approval

Declaration of Conformity

Test Certificates









Special Test Certificate Type Test
Certificates/Test
Report

Shipping Approval

other



Environmental Confirmations

GL

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3NA3240/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3240}}$


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

Datanorm GAEB81 GAEB83 RTF TXT

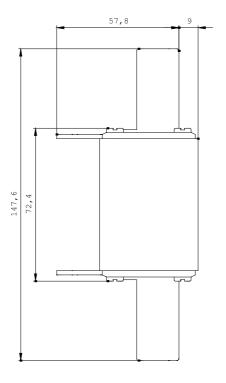



last change: Jan 28, 2013