SIEMENS

Data sheet 3NA6144



LV HRC fuse element, NH1, In: 250 A, gG, Un AC: 500 V, Un DC: 440 V, Combined indicator, Insulated grip lugs

del oduct brand name SENTRON oduct designation LV HRC fuse link with blade contacts esign of an identification indicator Combination alarms esign of the switching contact Non-corroding, silver-plated LV HRC fuse link LV HRC fus	
Detection class IP IP20, with connected conductors teching capacity witching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value • according to IEC 60947-2 rated value • according to IEC 60947-2 rated value • according to IEC 60947-2 rated value	
asign of the product asign of an identification indicator asign of the switching contact asign of the switching contact Any, preferably vertical at a promote to the foundations and the product of the current at AC in hot perating state per pole chanical Design at weight at waixinum at minimum a maximum at minimum a maximum at wirronmental category avironmental category avironmental category at the fire at weight at part of the product Any, preferably verical per pole ctificates ference code according to IEC 81346-2 FC	
asign of an identification indicator Sesign of the switching contact Sesign of the switching contact Sesign of the fuse link LV HRC fuse link Seral technical data Rear of the fuse link Seral to the seral to link Seral to	
pesign of the switching contact pesign of the fuse link peral technical data LV HRC fuse link peral technical data LV HRC fuse link Peral technical data LV HRC fuse link LV HRC fuse link LV HRC fuse link Peral technical data NH1 Peral technical data AC/DC Peral technical decondations Peral technical data AC/DC Peral tec	
asign of the fuse link LV HRC fuse link LV HRC fuse link are of fuse system according to EN 60269-1 NH1 perating class of the fuse link gG ounting type per of voltage of the operating voltage at AC rated value at C rated value at DC tection class otection class IP troining capacity witching capacity witching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value bower loss [W] ower loss [W] ower loss [W] for rated value of the current at AC in hot berating pastion witch of the enclosure ounting position at weight dith of the enclosure ounting position at weight at So g different at AC at AC at So g different at AC at Cated at	
reral technical data ze of fuse system according to EN 60269-1 peratting class of the fuse link geratting class of the operating voltage a CV/DC pupply voltage a t AC rated value a t DC at DC 440 V tection class cotection class IP IP20, with connected conductors tching capacity witching capacity witching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value according to IEC 60947-2 rated value bever loss [W] cover loss [W] cover loss [W] cover loss [W] for rated value of the current at AC in hot berating state per pole chanical Design dith of the enclosure counting position at weight 47.2 mm counting position at weight 450 g drironmental conditions minimum minimum	
per of fuse system according to EN 60269-1 NH1 perating class of the fuse link per of voltage of the operating voltage of voltage of the operating voltage of at AC rated value of at DC of a	
perating class of the fuse link ounting type pe of voltage of the operating voltage pe of voltage of the operating voltage at AC rated value at DC at DC tection class otection class IP tiching capacity vitching capacity current at DC according to IEC 60947-2 rated value at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value bearing state per pole chanical Design dith of the enclosure outting position at weight vironmental conditions mibient temperature during operation a maximum a maximum a maximum a maximum a maximum a moderating state per pole charical category a maximum a maximu	
ounting type insulated grip lugs pe of voltage of the operating voltage • at AC rated value • at DC onductors IP20, with connected conductors IP20	
pe of voltage of the operating voltage at AC rated value at DC at DC tection class otection class IP tricking capacity witching capacity witching capacity current at DC according to IEC 60947-2 rated value bever loss [W] tower loss [W] to rated value of the current at AC in hot loss [W] tower loss [W] tower loss [W] to rated value of the current at AC in hot loss [W] tower loss [W] to set W to set W	
inply voltage at AC rated value at DC tection class otection class IP IP20, with connected conductors tching capacity vitching capacity vitching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value to according to IEC 60947-2 rated value according to IEC 60947-2 rated value to according to IEC 81346-2	
at AC rated value at DC tection class otection class IP IP20, with connected conductors tching capacity vitching capacity vitching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value text DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value text DC according to IEC 81346-2 TAC ACCORDING TO ACCO	
tection class obtection class IP IP20, with connected conductors tching capacity witching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA sipation over loss [W] over loss [W] Is.2 W over loss [W] Is.	
tection class Interest of tection class IP Interest of tection class IT Interest of tection c	
tching capacity vitching capacity vitching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA sipation ower loss [W] ower loss	
vitching capacity vitching capacity vitching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA sipation Diver loss [W] 18.2 W Diver loss [W] 18.2 W Diver loss [W] 18.2 W Diverating state per pole Chanical Design didth of the enclosure Ounting position Any, preferably vertical at weight Ariconmental conditions Inbient temperature during operation • minimum • maximum Any 40 °C Diverance of the current at AC in hot and the current at AC in hot are also as a cur	
witching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA sipation ower loss [W] the proof of the current at AC in hot over loss [W] for rated value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for rated value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot over loss [W] for value of the current at AC in hot ov	
at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA 18.2 W 18.	
● according to IEC 60947-2 rated value sipation ower loss [W] ower loss [W] for rated value of the current at AC in hot overating state per pole chanical Design idth of the enclosure ounting position et weight frommental conditions mbient temperature during operation ● maximum • maximum • maximum 40 °C rivironmental category rivironmental category during storage ference code according to IEC 81346-2 FC	
power loss [W] power loss [W] for rated value of the current at AC in hot perating state per pole chanical Design didth of the enclosure ounting position Any, preferably vertical et weight formental conditions mbient temperature during operation • maximum • maximum • maximum 40 °C revironmental category revironmental category during storage tificates ference code according to IEC 81346-2 FC	
bower loss [W] 18.2 W bower loss [W] for rated value of the current at AC in hot berating state per pole chanical Design didth of the enclosure 47.2 mm ounting position Any, preferably vertical 450 g vironmental conditions mbient temperature during operation • maximum -5 °C nvironmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C tificates ference code according to IEC 81346-2 FC	
ower loss [W] for rated value of the current at AC in hot berating state per pole chanical Design idth of the enclosure ounting position Any, preferably vertical et weight vironmental conditions mbient temperature during operation • minimum • maximum 40 °C rivironmental category -20 to +50 at 95% relative humidity navironmental category during storage tificates ference code according to IEC 81346-2 FC	
perating state per pole chanical Design didth of the enclosure ounting position Any, preferably vertical et weight fronmental conditions mbient temperature during operation • minimum • maximum • maximum 40 °C rivironmental category rivironmental category rivironmental category rivironmental category rivironmental category rivironmental category for each of the enclosure 47.2 mm Any, preferably vertical 450 g rivironmental conditions -5 °C -20 to +50 at 95% relative humidity rivironmental category during storage 90% at 20°C tificates for ence code according to IEC 81346-2 FC	
idth of the enclosure 47.2 mm Any, preferably vertical et weight 450 g vironmental conditions mbient temperature during operation • minimum • maximum 40 °C nvironmental category vironmental category vironmental category power of tificates ference code according to IEC 81346-2 FC	
Any, preferably vertical at weight 450 g Any, preferably vertical 450 g	
et weight vironmental conditions mbient temperature during operation • minimum • maximum • maximum 40 °C -vironmental category -20 to +50 at 95% relative humidity environmental category during storage tificates ference code according to IEC 81346-2 FC	
rironmental conditions mbient temperature during operation minimum maximum 40 °C -20 to +50 at 95% relative humidity environmental category during storage tificates ference code according to IEC 81346-2 FC	
mbient temperature during operation • minimum • maximum 40 °C -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C tificates ference code according to IEC 81346-2 FC	
minimum	
rivironmental category -20 to +50 at 95% relative humidity rivironmental category during storage 90% at 20°C tificates ference code according to IEC 81346-2 FC	
nvironmental category during storage 90% at 20°C tificates ference code according to IEC 81346-2 FC	
tificates ference code according to IEC 81346-2 FC	
ference code according to IEC 81346-2 FC	
•	
eneral Product Approval Decla	
	ration of Conformity



Confirmation









Test Certificates Marine / Shipping other

<u>Miscellaneous</u> <u>Special Test Certificate</u>

Type Test Certificates/Test Report



Miscellaneous Confirmation

other Environment

Miscellaneous Environmental Con-

firmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA6144

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3NA6144

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA6144


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications

http://www.siemens.com/specifications

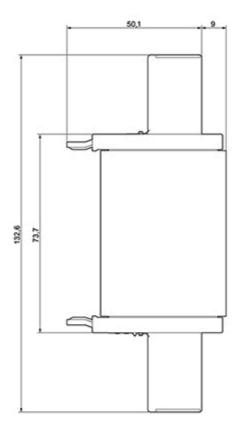



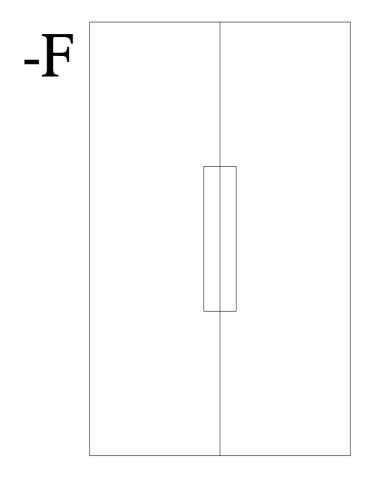

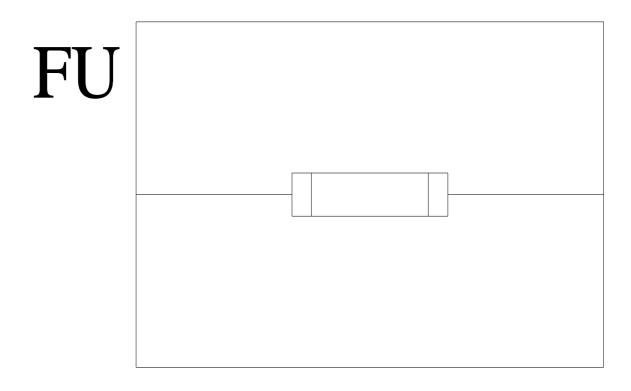

last modified: 2/14/2023 🖸