



LV HRC fuse element, NH000, In: 63 A, gG, Un AC: 400 V, Combined indicator, insulated Grip lugs

Model

product brand name	SETRON
product designation	LV HRC fuse link
design of the product	With blade contacts
design of an identification indicator	Combination alarms
design of the switching contact	Non-corroding, silver-plated
design of the fuse link	LV HRC fuse link

General technical data

size of fuse system according to EN 60269-1	NH000
operating class of the fuse link	gG
mounting type	insulated grip lugs
type of voltage of the operating voltage	AC
supply voltage	
• at AC rated value	400 V

Protection class

protection class IP	IP20, with connected conductors
---------------------	---------------------------------

Switching capacity

switching capacity current	
• according to IEC 60947-2 rated value	120 kA

Dissipation

power loss [W]	4.36 W
power loss [W] for rated value of the current at AC in hot operating state per pole	4.36 W

Current

operational current	
• at 30 °C rated value	61.74 A
• at 40 °C rated value	59.85 A
• at 45 °C rated value	57.96 A
• at 50 °C rated value	56.7 A
• at 55 °C rated value	55.44 A
• at 60 °C rated value	54.18 A
• at AC rated value	63 A

Mechanical Design

width of the enclosure	21 mm
mounting position	Any, preferably vertical
net weight	131 g

Environmental conditions

ambient temperature during operation	
• minimum	-5 °C
• maximum	40 °C

environmental category
environmental category during storage

-20 to +50 at 95% relative humidity
90% at 20°C

General Product Approval

Declaration of Conformity

Test Certificates

[Confirmation](#)



[Miscellaneous](#)

Test Certificates

Marine / Shipping

other

[Special Test Certificate](#)



[Miscellaneous](#)

[Environmental Confirmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA6822-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA6822-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA6822-4

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

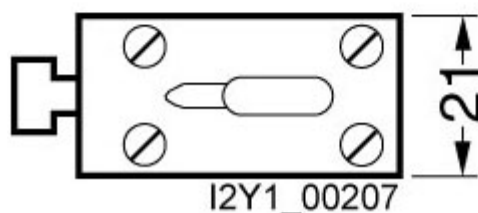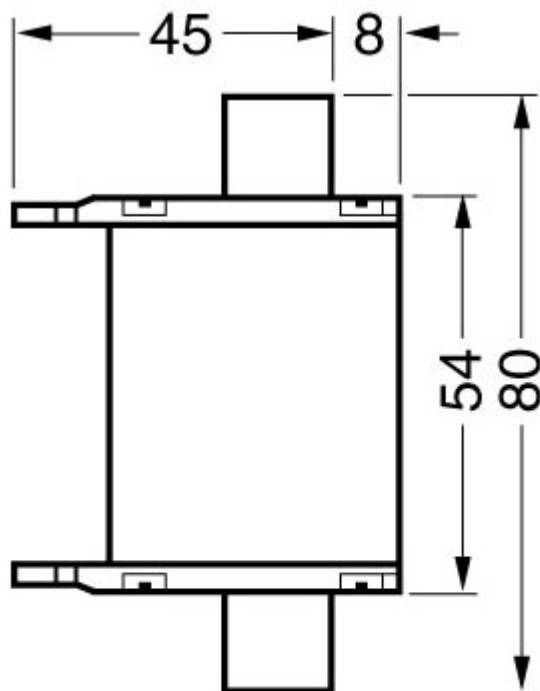

-F

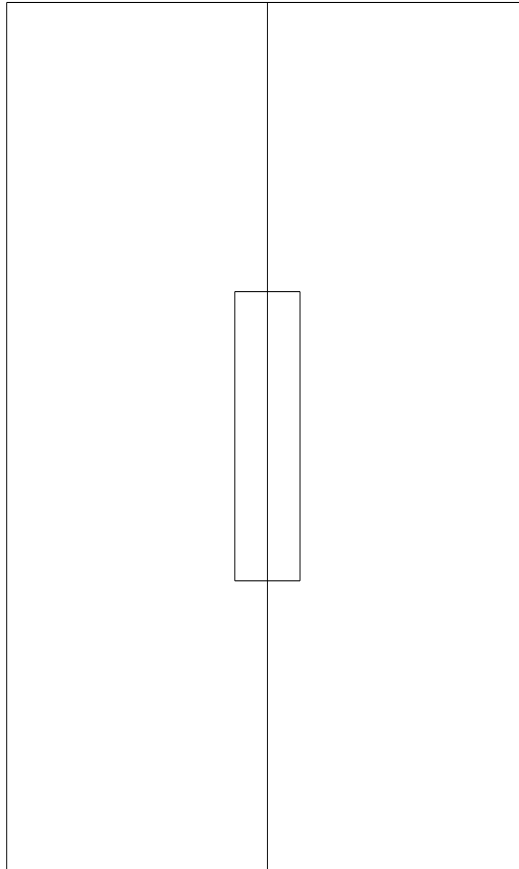

FU

