## SIEMENS

## Data sheet


## 3ND1817



LV HRC fuse element, NH000, In: 40 A, aM, Un AC: 500 V, Un DC: 440 V, Front indicator, live grip lugs

Model							
product brand name		SENTRON					
product designation		LV HRC fuse link					
design of the product		With blade contacts					
design of an identification indicator		Front indicators					
design of the switching contact		Non-corroding, silver-plated					
design of the fuse link		LV HRC fuse link					
General technical data							
size of fuse system according to EN 60269-1		NH000					
operating class of the fuse link	operating class of the fuse link		aM				
mounting type		non-insulated grip lugs					
type of voltage of the operating voltage		AC					
supply voltage							
at AC rated value		500 V					
Protection class							
protection class IP		IP20, with connected conductor	rs				
Switching capacity							
switching capacity current							
<ul> <li>according to IEC 60947-2 rated value</li> </ul>		120 kA					
Dissipation							
power loss [W]		2 W					
power loss [W] for rated value of the current at AC in hot operating state per pole		2 W					
Mechanical Design							
width of the enclosure		21 mm					
mounting position		Any, preferably vertical					
net weight		130 g					
Environmental conditions							
ambient temperature during operation							
• minimum		-5 °C					
• maximum		40 °C					
environmental category		-20 to +50 at 95% relative humidity					
environmental category during storage		90% at 20°C					
Certificates							
reference code according to IEC 81346-2		FC					
General Product Approval	Declaration of	Conformity	Test Certificates				

<u>Confirmation</u>	EAC	CE EG-Konf.	UK CA	<u>Type Test Certific-</u> ates/Test Report	<u>Miscellaneous</u>
Test Certificates	other		Environment		
Special Test Certific- ate	<u>Confirmation</u>	<u>Miscellaneous</u>	Environmental Con- firmations		
https://press.siemens.c Siemens is working o Please contact your loc EAC relevant market (o Information on the pa https://support.industry	other than the sanctioned I ackaging .siemens.com/cs/ww/en/vi	e/siemens-wind-down-rus rent EAC certificates. status of validity of the EA EAEU member states Ru iew/109813875	AC certification if you inte	nd to import or offer to supp	ly these products to an
http://www.siemens.com Industry Mall (Online https://mall.industry.sie Service&Support (Ma https://support.industry Image database (proc	ordering system) mens.com/mall/en/en/Cata nuals, Certificates, Char siemens.com/cs/ww/en/pr duct images, 2D dimensio siemens.com/bilddb/cax_e r m/cax	alog/product?mlfb=3ND1 acteristics, FAQs,) s/3ND1817 on drawings, 3D models		ns,)	
		—45 —•			
			54 80	8	
	Щ			_	
	더	0 0 I2Y1_0			

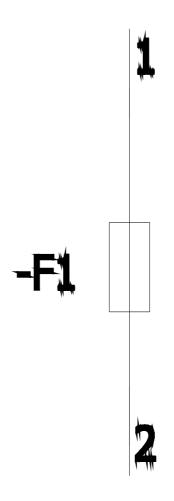

last modified:

2/14/2023 🖸