SIEMENS

Data sheet 3NE8725-1



SITOR fuse link, with Bolt-on links, NH000, In: 200 A, aR, Un AC: 690 V, Un DC: 440 V, front indicator

SENTRON	
SITOR fuse link	
With bolt-on links	
front indicator	
SITOR, LV HRC design	
NH000	
aR	
0.9	
AC/DC	
690 V	
690 V	
440 V	
50 kA	
200 kA	
36 W	
36 W	
36 W	
Any, preferably vertical	
-20 °C	
50 °C	
-20 to +50 at 95% relative humi-	dity
	Declaration of Conformity
	SITOR fuse link With bolt-on links front indicator SITOR, LV HRC design NH000 aR 0.9 AC/DC 690 V 690 V 440 V 50 kA 200 kA 36 W 36 W Any, preferably vertical



Confirmation



EAC





Confirmation

Miscellaneous

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE8725-1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3NE8725-1

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE8725-1

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

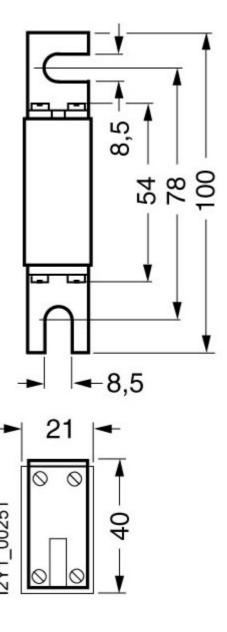

last modified: 2/3/2023 🖸