










Fuseless motor starter Direct start 600VAC Size S00 0.28-0.4A 220/240VAC 50/60Hz screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor)


| | |
|--|-------------------------------|
| product brand name | SIRIUS |
| product designation | non-fused motor starter 3RA2 |
| design of the product | direct starter |
| manufacturer's article number | |
| • of the supplied contactor | 3RT2015-1AP61 |
| • of the supplied circuit-breakers | 3RV2011-0EA15 |
| • of the supplied busbar adapter | 8US1251-5DS10 |
| • of the supplied link module | 3RA1921-1DA00 |
| General technical data | |
| size of the circuit-breaker | S00 |
| size of load feeder | S00 |
| product extension auxiliary switch | Yes |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 6 kV |
| shock resistance according to IEC 60068-2-27 | 6g / 11 ms |
| mechanical service life (operating cycles) of contactor typical | 30 000 000 |
| type of assignment | 2 |
| Ambient conditions | |
| ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |
| • during transport | -55 ... +80 °C |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | electromechanical |
| adjustable current response value current of the current-dependent overload release | 0.28 ... 0.4 A |
| operating voltage | |
| • rated value | 690 V |
| • at AC-3 rated value maximum | 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current at AC-3 at 400 V rated value | 0.3 A |
| operating power at AC-3 | |
| • at 400 V rated value | 90 W |
| • at 500 V rated value | 120 W |
| • at 690 V rated value | 180 W |
| Control circuit/ Control | |
| control supply voltage at AC | |
| • at 50 Hz rated value | 220 V |
| • at 50 Hz rated value | 187 ... 242 V |
| • at 60 Hz rated value | 240 V |
| • at 60 Hz rated value | 192 ... 264 V |
| apparent holding power of magnet coil at AC | 4.8 VA |
| inductive power factor with the holding power of the coil | 0.25 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 1 |
| number of NO contacts for auxiliary contacts | 2 |
| Protective and monitoring functions | |
| trip class | CLASS 10 |

| | | |
|--|--|--------------------------------|
| design of the overload release | thermal (bimetallic) | |
| response value current of instantaneous short-circuit trip unit | 5.2 A | |
| Short-circuit protection | | |
| product function short circuit protection | Yes | |
| design of the short-circuit trip | magnetic | |
| conditional short-circuit current (I _q) | | |
| • at 690 V according to IEC 60947-4-1 rated value | 100 000 A | |
| • at 400 V according to IEC 60947-4-1 rated value | 153 000 A | |
| • at 500 V according to IEC 60947-4-1 rated value | 100 000 A | |
| Installation/ mounting/ dimensions | | |
| mounting position | vertical | |
| fastening method | for snapping onto 60 mm busbar systems | |
| height | 200 mm | |
| width | 45 mm | |
| depth | 155.1 mm | |
| required spacing | | |
| • for grounded parts | | |
| — forwards | 0 mm | |
| — backwards | 0 mm | |
| — upwards | 20 mm | |
| — at the side | 9 mm | |
| — downwards | 10 mm | |
| • for live parts | | |
| — forwards | 0 mm | |
| — backwards | 0 mm | |
| — upwards | 20 mm | |
| — downwards | 10 mm | |
| — at the side | 9 mm | |
| Connections/ Terminals | | |
| type of electrical connection for main current circuit | screw-type terminals | |
| type of connectable conductor cross-sections for main contacts stranded | 0.5 ... 4 mm², 2x (0.75 ... 2.5 mm²) | |
| connectable conductor cross-section for main contacts finely stranded with core end processing | 0.5 ... 2.5 mm² | |
| Safety related data | | |
| B10 value with high demand rate according to SN 31920 | 1 000 000 | |
| proportion of dangerous failures with high demand rate according to SN 31920 | 73 % | |
| protection class IP on the front according to IEC 60529 | IP20 | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front | |
| Certificates/ approvals | | |
| General Product Approval | | For use in hazardous locations |
| | | Declaration of Conformity |
| <div><div>Confirmation</div><div></div><div></div><div></div><div></div><div></div></div> | | |
| | | |
| Test Certificates | | Marine / Shipping |
| <div><div>Type Test Certificates/Test Report</div><div>Special Test Certificate</div></div> | | |
| <div><div></div><div></div><div></div><div></div></div> | | |
| Marine / Shipping | | other |
| | | Railway |



Vibration and Shock

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-0ED15-1AP6&objecttype=14&gridview=view1>

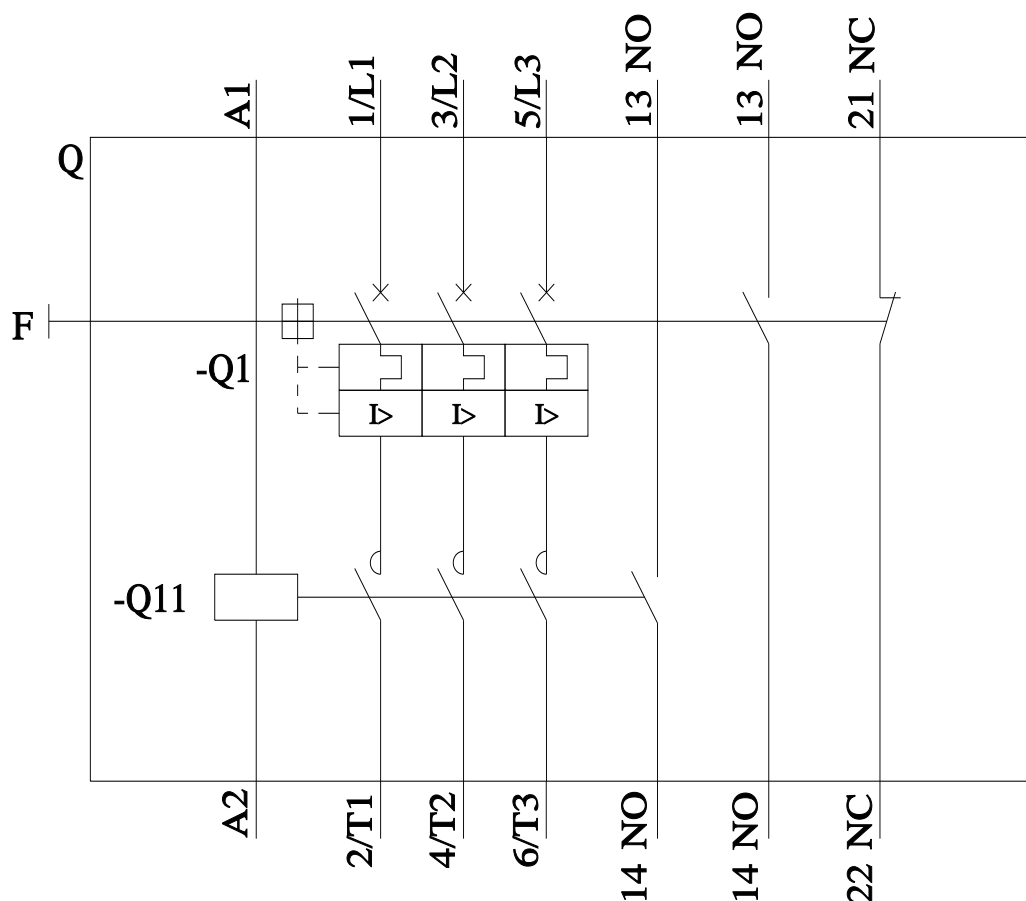

12/15/2020