



Overload relay 12.5...50 A Electronic For motor protection Size S3, Class 5E...30E Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name
product designation
product type designation

SIRIUS
solid-state overload relay
3RB3

General technical data

size of overload relay	S3
size of contactor can be combined company-specific power loss [W] for rated value of the current at AC in hot operating state	S3 0.9 W
• per pole	0.3 W
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
• between auxiliary and auxiliary circuit	300 V
• between auxiliary and auxiliary circuit	300 V
• between main and auxiliary circuit	600 V
• between main and auxiliary circuit	690 V
shock resistance	8g / 11 ms
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
thermal current	50 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
reference code according to IEC 81346-2 Substance Prohibition (Date)	F 03/01/2017

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
temperature compensation	-25 ... +60 °C
relative humidity during operation	10 ... 95 %

Main circuit

number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	12.5 ... 50 A
operating voltage	
• rated value	1 000 V
• for remote-reset function at DC	24 V

• at AC-3e rated value maximum	1 000 V
operating frequency rated value	50 ... 60 Hz
operational current rated value	50 A
operational current at AC-3e at 400 V rated value	50 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	7.5 ... 22 kW
• for AC motors at 500 V at 50 Hz	11 ... 30 kW
• for AC motors at 690 V at 50 Hz	11 ... 45 kW

Auxiliary circuit

design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

Protective and monitoring functions

trip class	CLASS 5E, 10E, 20E and 30E adjustable
design of the overload release	electronic
response value current of the grounding protection minimum	0.75 x IMotor
response time of the grounding protection in settled state	1 000 ms
operating range of the grounding protection relating to current set value	
• minimum	IMotor > lower current setting value
• maximum	IMotor < upper current setting value x 3.5

UL/CSA ratings

full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	50 A
• at 600 V rated value	50 A
contact rating of auxiliary contacts according to UL	B600 / R300

Short-circuit protection

design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 200 A
— with type of assignment 2 required	gG: 200 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

Installation/ mounting/ dimensions

mounting position	any
fastening method	Contactor mounting
height	106 mm
width	70 mm
depth	124 mm

Connections/ Terminals

product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
arrangement of electrical connectors for main current	Top and bottom

circuit

type of connectable conductor cross-sections for main contacts

- solid
- stranded
- solid or stranded
- finely stranded with core end processing

type of connectable conductor cross-sections

- for auxiliary contacts
 - solid
 - solid or stranded
 - finely stranded with core end processing
- at AWG cables for auxiliary contacts

tightening torque

- for main contacts with screw-type terminals
- for auxiliary contacts with screw-type terminals

design of screwdriver shaft**size of the screwdriver tip****design of the thread of the connection screw**

- for main contacts
- of the auxiliary and control contacts

2x (2.5 ... 16 mm²)
2x 16 mm²
1x (2,5 ... 70 mm²), 2x (2,5 ... 50 mm²)
1x (2,5 ... 50 mm²), 2x (2,5 ... 35 mm²)

1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²)
1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²)
1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²)
2x (20 ... 14)

4.5 ... 6 N·m
0.8 ... 1.2 N·m

Diameter 5 to 6 mm
Pozidriv PZ 2

M6
M3

Safety related data**protection class IP on the front according to IEC 60529**

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

Communication/ Protocol**type of voltage supply via input/output link master**

No

Electromagnetic compatibility**conducted interference**

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3

2 kV (line to earth) corresponds to degree of severity 3

1 kV (line to line) corresponds to degree of severity 3

10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz

10 V/m

6 kV contact discharge / 8 kV air discharge

Display**display version for switching status**

Slide switch

Certificates/ approvals**General Product Approval**

EMC



[Confirmation](#)

**For use in hazardous locations****Declaration of Conformity****Test Certificates****Marine / Shipping**

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

**Marine / Shipping****other**

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3143-4UB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3143-4UB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3143-4UB0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3143-4UB0&objecttype=14&gridview=view1>

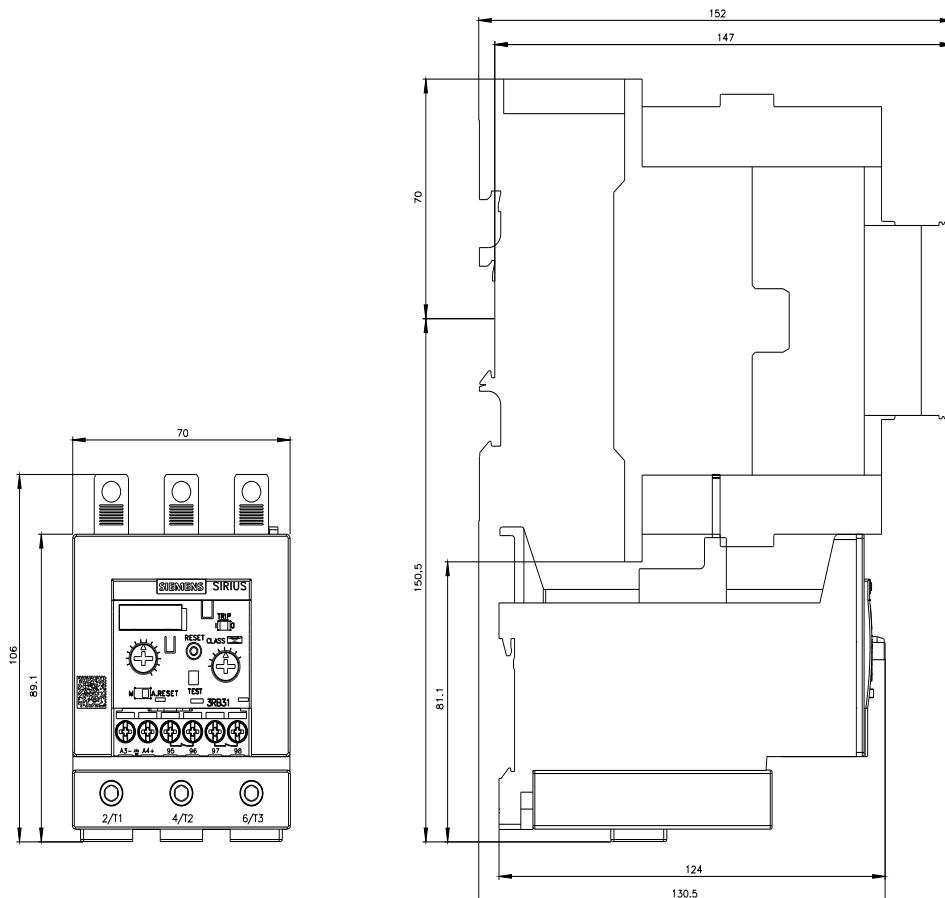

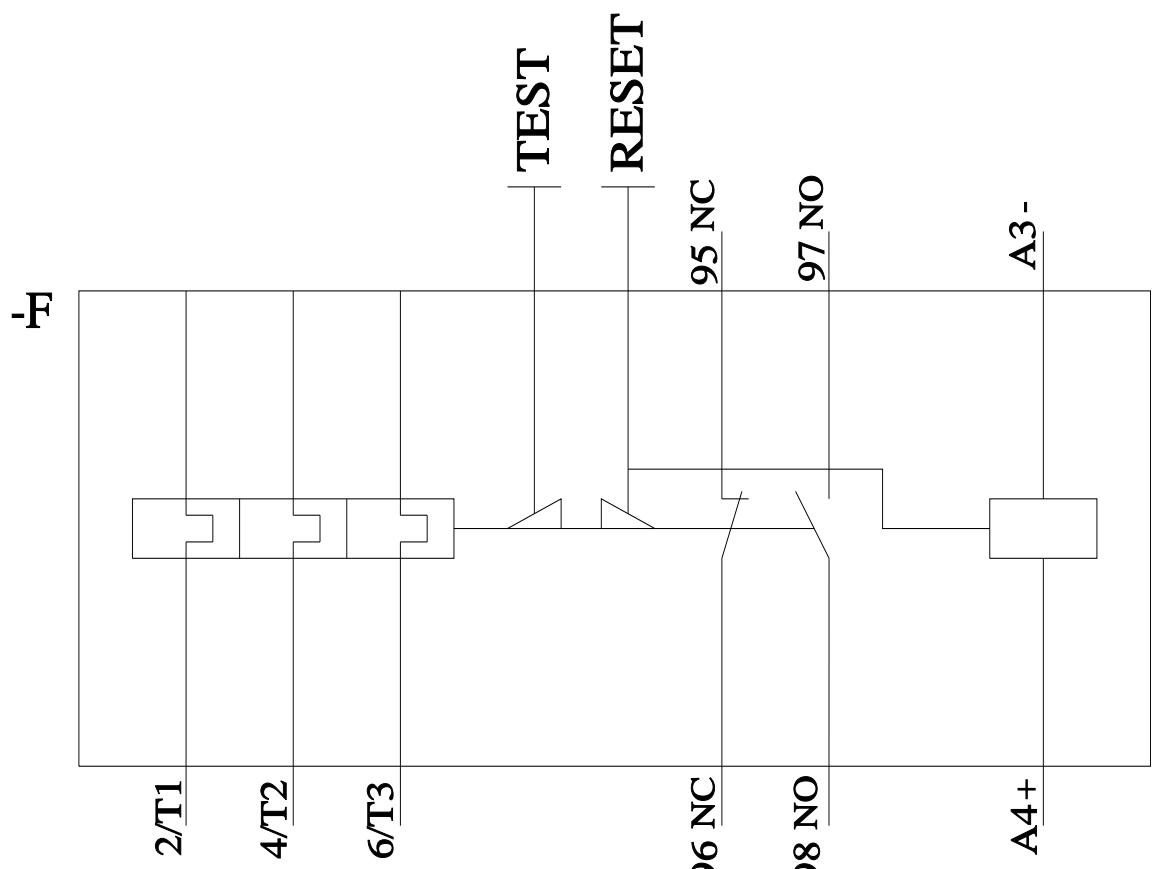

last modified:

2/9/2022