



Semiconductor relay, 1-phase 3RF2 Overall width 22.5 mm, 50 A 48-460 V / 110-230 V AC Ring cable connection

<p>product brand name</p> <p>product designation</p> <p>design of the product</p> <p>product type designation</p> <p>manufacturer's article number</p> <ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _4 of the accessories that can be ordered <p>product designation</p> <ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _4 of the accessories that can be ordered 	<p>SIRIUS</p> <p>solid-state relay</p> <p>single-phase</p> <p>3RF21</p> <p>3RF2900-3PA88</p> <p>3RF2950-0GA36</p> <p>terminal cover</p> <p>load monitoring</p>
---	--

General technical data

<p>product function</p> <p>power loss [V·A] maximum</p> <p>power loss [W] for rated value of the current without load current share typical</p> <p>insulation voltage rated value</p> <p>type of voltage of the control supply voltage</p> <p>surge voltage resistance of main circuit rated value</p> <p>shock resistance according to IEC 60068-2-27</p> <p>vibration resistance according to IEC 60068-2-6</p> <p>reference code according to IEC 81346-2</p> <p>Substance Prohibitance (Date)</p>	<p>zero-point switching</p> <p>66 VA</p> <p>3.5 W</p> <p>600 V</p> <p>AC</p> <p>6 kV</p> <p>15g / 11 ms</p> <p>2g</p> <p>Q</p> <p>05/28/2009</p>
---	--

Main circuit

<p>number of poles for main current circuit</p> <p>number of NO contacts for main contacts</p> <p>number of NC contacts for main contacts</p> <p>operating voltage at AC</p> <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value <p>operating frequency rated value</p> <p>relative symmetrical tolerance of the operating frequency</p> <p>operating range relative to the operating voltage at AC</p> <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz <p>operational current</p> <ul style="list-style-type: none"> • at AC-51 rated value • according to UL 508 rated value <p>ampacity maximum</p> <p>operational current minimum</p> <p>rate of voltage rise at the thyristor for main contacts maximum permissible</p>	<p>1</p> <p>1</p> <p>0</p> <p>48 ... 460 V</p> <p>48 ... 460 V</p> <p>50 ... 60 Hz</p> <p>10 %</p> <p>40 ... 506 V</p> <p>40 ... 506 V</p> <p>50 A</p> <p>50 A</p> <p>50 A</p> <p>500 mA</p> <p>1 000 V/μs</p>
--	--

blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I²t value maximum	1 800 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	110 ... 230 V
• at 60 Hz	110 ... 230 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at AC	
• at 50 Hz full-scale value for signal<0> recognition	40 V
• at 60 Hz full-scale value for signal<0> recognition	40 V
control supply voltage	
• at AC initial value for signal <1> detection	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
OFF-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
• side-by-side mounting	Yes
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	85 mm
width	22.5 mm
depth	48 mm
Connections/ Terminals	
type of electrical connection	Ring cable lug connection ring terminal lug connection
• for main current circuit	
• for auxiliary and control circuit	
type of connectable conductor cross-sections	
• for main contacts for JIS cable lug	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5
• for DIN cable lug for main contacts	DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	7 ... 10.3 lbf·in
• for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in
design of the thread of the connection screw	
• for main contacts	M5
• of the auxiliary and control contacts	M3
stripped length of the cable	
• for main contacts	7 mm

- for auxiliary and control contacts

7 mm

Safety related data

protection class IP on the front according to IEC 60529

IP00; IP20 with cover

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front with cover

Ambient conditions

installation altitude at height above sea level maximum

1 000 m

ambient temperature

- during operation
- during storage

-25 ... +60 °C
-55 ... +80 °C

Electromagnetic compatibility

conducted interference

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

2 kV / 5 kHz behavior criterion 2
2 kV behavior criterion 2

1 kV behavior criterion 2

140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1

field-based interference according to IEC 61000-4-3

80 MHz ... 1 GHz 10 V/m, behavior criterion 1

electrostatic discharge according to IEC 61000-4-2

4 kV contact discharging / 8 kV air discharging, behavior criterion 2

conducted HF interference emissions according to CISPR11

Class A for industrial environment

field-bound HF interference emission according to CISPR11

Class B for the domestic, business and commercial environments

Short-circuit protection, design of the fuse link

manufacturer's article number

- of gS fuse for semiconductor protection at NH design usable
- of full range R fuse link for semiconductor protection at cylindrical design usable
- of back-up R fuse link for semiconductor protection at NH design usable
- of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable

[3NE1802-0: These fuses have a smaller rated current than the semiconductor relays](#)

[5SE1335: These fuses have a smaller rated current than the semiconductor relays](#)

[3NE8017-1](#)

[3NC1450](#)

[3NC2250](#)

manufacturer's article number of the gG fuse

- at NH design usable
- at cylindrical design 22 x 58 mm usable

[3NA6807: These fuses have a smaller rated current than the semiconductor relays](#)

[3NW6205-1: These fuses have a smaller rated current than the semiconductor relays](#)

manufacturer's article number

- of DIAZED fuse usable
- of NEOZED fuse usable

[5SB2711: These fuses have a smaller rated current than the semiconductor relays](#)

[5SE2320: These fuses have a smaller rated current than the semiconductor relays](#)

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



[Confirmation](#)



Declaration of Conformity

Test Certificates

other



[Type Test Certificates/Test Report](#)

[Confirmation](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RF2150-3AA24>

Cax online generator


<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mfb=3RF2150-3AA24>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2150-3AA24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RF2150-3AA24&lang=en

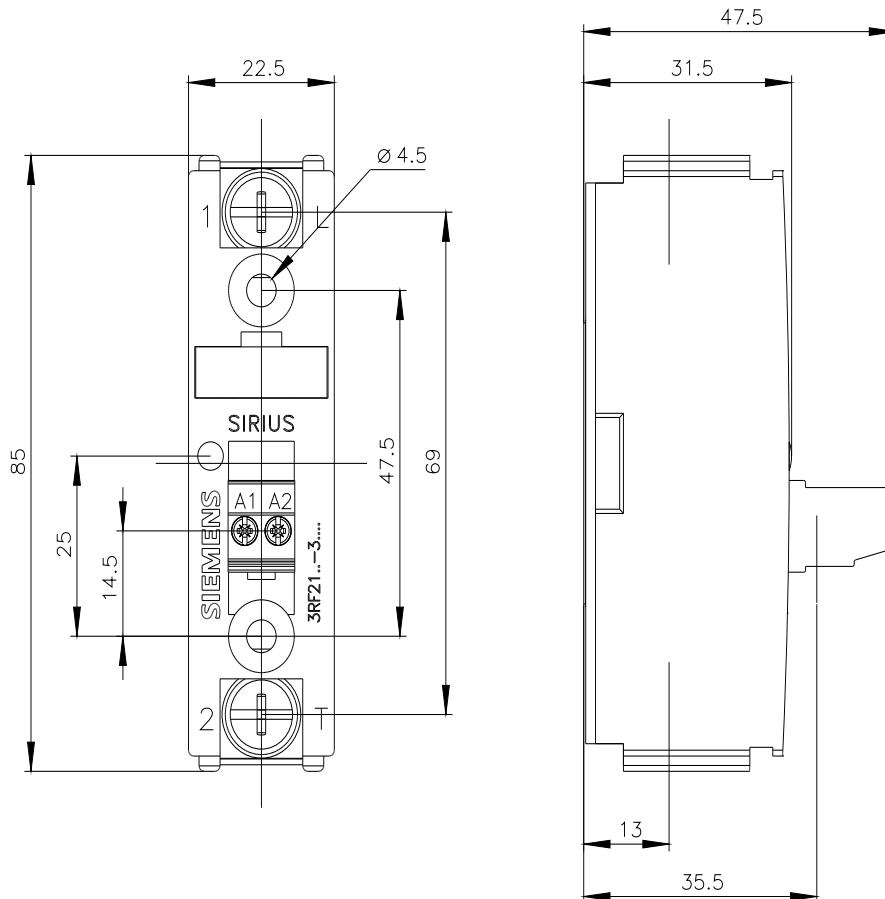

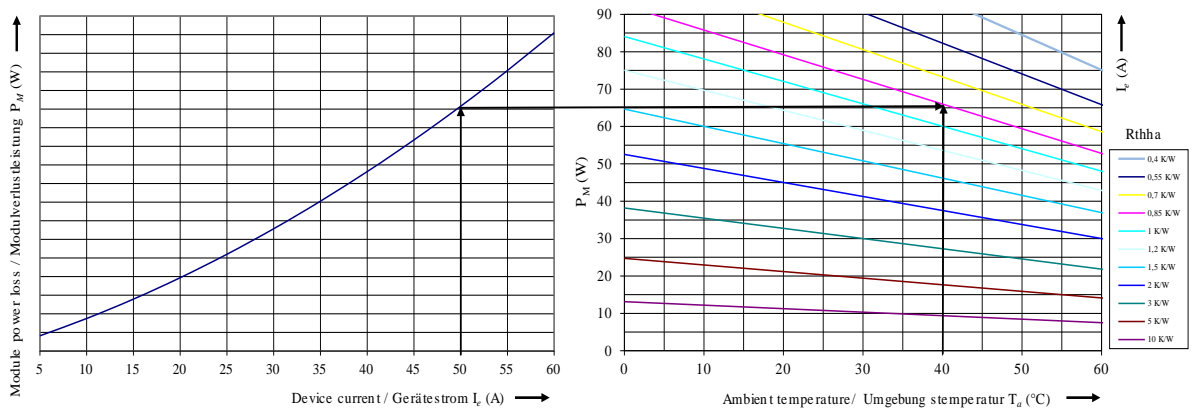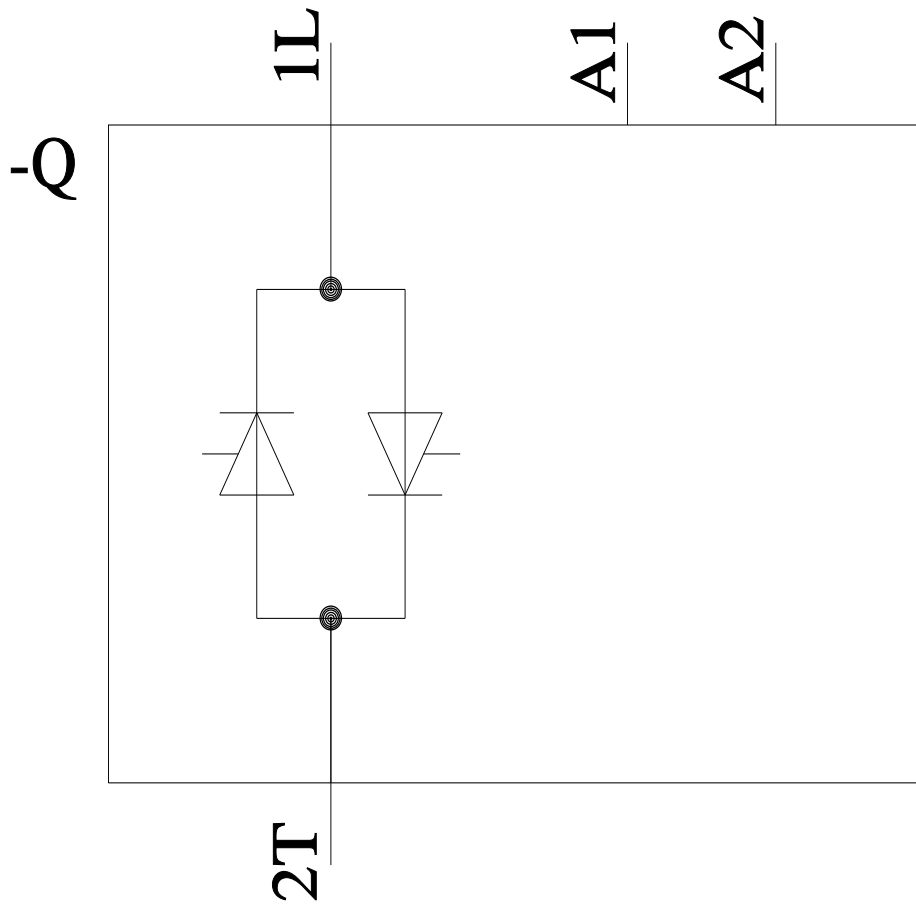

last modified:

1/27/2022