



Semiconductor relay, 1-phase 3RF2 Overall width 22.5 mm, 70 A 48-600 V / 4-30 V DC screw terminal Blocking voltage 1200 V

|                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>product brand name</b>                                                                                                                                                                                                                                                                                   | SIRIUS                                                                                                                                                            |
| <b>product designation</b>                                                                                                                                                                                                                                                                                  | solid-state relay                                                                                                                                                 |
| <b>design of the product</b>                                                                                                                                                                                                                                                                                | single-phase                                                                                                                                                      |
| <b>product type designation</b>                                                                                                                                                                                                                                                                             | 3RF21                                                                                                                                                             |
| <b>manufacturer's article number</b>                                                                                                                                                                                                                                                                        |                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>• _1 of the accessories that can be ordered</li><li>• _2 of the accessories that can be ordered</li><li>• _3 of the accessories that can be ordered</li><li>• _4 of the accessories that can be ordered</li><li>• _5 of the accessories that can be ordered</li></ul> | <a href="#">3RF2900-3PA88</a><br><a href="#">3RF2990-0HA16</a><br><a href="#">3RF2900-0EA18</a><br><a href="#">3RF2990-0GA16</a><br><a href="#">3RF2920-0FA08</a> |
| <b>product designation</b>                                                                                                                                                                                                                                                                                  |                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>• _1 of the accessories that can be ordered</li><li>• _2 of the accessories that can be ordered</li><li>• _3 of the accessories that can be ordered</li><li>• _4 of the accessories that can be ordered</li><li>• _5 of the accessories that can be ordered</li></ul> | terminal cover<br>power regulator<br>converter<br>load monitoring<br>load monitoring, basis                                                                       |
| <b>General technical data</b>                                                                                                                                                                                                                                                                               |                                                                                                                                                                   |
| <b>product function</b>                                                                                                                                                                                                                                                                                     | zero-point switching                                                                                                                                              |
| <b>power loss [V·A] maximum</b>                                                                                                                                                                                                                                                                             | 94 VA                                                                                                                                                             |
| <b>power loss [W] for rated value of the current</b>                                                                                                                                                                                                                                                        |                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>• at AC in hot operating state</li><li>• at AC in hot operating state per pole</li><li>• without load current share typical</li></ul>                                                                                                                                 | 94 W<br>94 W<br>0.5 W                                                                                                                                             |
| <b>insulation voltage rated value</b>                                                                                                                                                                                                                                                                       | 600 V                                                                                                                                                             |
| type of voltage of the control supply voltage                                                                                                                                                                                                                                                               | DC                                                                                                                                                                |
| surge voltage resistance of main circuit rated value                                                                                                                                                                                                                                                        | 6 kV                                                                                                                                                              |
| <b>shock resistance according to IEC 60068-2-27</b>                                                                                                                                                                                                                                                         | 15g / 11 ms                                                                                                                                                       |
| <b>vibration resistance according to IEC 60068-2-6</b>                                                                                                                                                                                                                                                      | 2g                                                                                                                                                                |
| <b>reference code according to IEC 81346-2</b>                                                                                                                                                                                                                                                              | Q                                                                                                                                                                 |
| <b>Substance Prohibitance (Date)</b>                                                                                                                                                                                                                                                                        | 05/28/2009                                                                                                                                                        |
| <b>Main circuit</b>                                                                                                                                                                                                                                                                                         |                                                                                                                                                                   |
| <b>number of poles for main current circuit</b>                                                                                                                                                                                                                                                             | 1                                                                                                                                                                 |
| <b>number of NO contacts for main contacts</b>                                                                                                                                                                                                                                                              | 1                                                                                                                                                                 |
| <b>number of NC contacts for main contacts</b>                                                                                                                                                                                                                                                              | 0                                                                                                                                                                 |
| <b>operating voltage at AC</b>                                                                                                                                                                                                                                                                              |                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>• at 50 Hz rated value</li><li>• at 60 Hz rated value</li></ul>                                                                                                                                                                                                       | 48 ... 600 V<br>48 ... 600 V                                                                                                                                      |
| <b>operating frequency rated value</b>                                                                                                                                                                                                                                                                      | 50 ... 60 Hz                                                                                                                                                      |
| <b>relative symmetrical tolerance of the operating frequency</b>                                                                                                                                                                                                                                            | 10 %                                                                                                                                                              |
| <b>operating range relative to the operating voltage at AC</b>                                                                                                                                                                                                                                              |                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>• at 50 Hz</li></ul>                                                                                                                                                                                                                                                  | 40 ... 660 V                                                                                                                                                      |

|                                                                                    |                         |
|------------------------------------------------------------------------------------|-------------------------|
| • at 60 Hz                                                                         | 40 ... 660 V            |
| <b>operational current</b>                                                         |                         |
| • at AC-51 rated value                                                             | 50 A                    |
| • according to UL 508 rated value                                                  | 50 A                    |
| <b>ampacity maximum</b>                                                            | 70 A                    |
| <b>operational current minimum</b>                                                 | 500 mA                  |
| <b>rate of voltage rise at the thyristor for main contacts maximum permissible</b> | 1 000 V/μs              |
| <b>blocking voltage at the thyristor for main contacts maximum permissible</b>     | 1 200 V                 |
| <b>reverse current of the thyristor</b>                                            | 10 mA                   |
| <b>derating temperature</b>                                                        | 40 °C                   |
| <b>surge current resistance rated value</b>                                        | 1 200 A                 |
| <b>I<sup>2</sup>t value maximum</b>                                                | 7 200 A <sup>2</sup> ·s |

#### Control circuit/ Control

|                                                          |                                       |
|----------------------------------------------------------|---------------------------------------|
| <b>type of voltage of the control supply voltage</b>     | DC                                    |
| <b>control supply voltage 1</b>                          |                                       |
| • at DC rated value                                      | 30 V                                  |
| • at DC                                                  | 4 ... 30 V                            |
| <b>control supply voltage</b>                            |                                       |
| • at DC initial value for signal <1> detection           | 4 V                                   |
| • at DC full-scale value for signal<0> recognition       | 1 V                                   |
| <b>control current at minimum control supply voltage</b> |                                       |
| • at DC                                                  | 13 mA                                 |
| control current at DC rated value                        | 15 mA                                 |
| <b>ON-delay time</b>                                     | 1 ms; additionally max. one half-wave |
| <b>OFF-delay time</b>                                    | 1 ms; additionally max. one half-wave |

#### Auxiliary circuit

|                                                     |   |
|-----------------------------------------------------|---|
| <b>number of NC contacts for auxiliary contacts</b> | 0 |
| <b>number of NO contacts for auxiliary contacts</b> | 0 |
| <b>number of CO contacts for auxiliary contacts</b> | 0 |

#### Installation/ mounting/ dimensions

|                                                                     |              |
|---------------------------------------------------------------------|--------------|
| <b>fastening method</b>                                             | screw fixing |
| • side-by-side mounting                                             | Yes          |
| <b>design of the thread of the screw for securing the equipment</b> | M4           |
| <b>tightening torque of fixing screw maximum</b>                    | 1.5 N·m      |
| <b>tightening torque [lbf·in] of fixing screw maximum</b>           | 13 lbf·in    |
| <b>height</b>                                                       | 85 mm        |
| <b>width</b>                                                        | 22.5 mm      |
| <b>depth</b>                                                        | 48 mm        |

#### Connections/ Terminals

|                                                                           |                                                                                         |
|---------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>type of electrical connection</b>                                      |                                                                                         |
| • for main current circuit                                                | screw-type terminals                                                                    |
| • for auxiliary and control circuit                                       | screw-type terminals                                                                    |
| <b>type of connectable conductor cross-sections</b>                       |                                                                                         |
| • for main contacts                                                       |                                                                                         |
| — solid                                                                   | 2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )                      |
| — finely stranded with core end processing                                | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> |
| • at AWG cables for main contacts                                         | 2x (14 ... 10)                                                                          |
| <b>connectable conductor cross-section for main contacts</b>              |                                                                                         |
| • solid or stranded                                                       | 1.5 ... 6 mm <sup>2</sup>                                                               |
| • finely stranded with core end processing                                | 1 ... 10 mm <sup>2</sup>                                                                |
| <b>type of connectable conductor cross-sections</b>                       |                                                                                         |
| • for auxiliary and control contacts                                      |                                                                                         |
| — solid                                                                   | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                    |
| — finely stranded with core end processing                                | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                    |
| — finely stranded without core end processing                             | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )                    |
| • at AWG cables for auxiliary and control contacts                        | 1x (AWG 20 ... 12)                                                                      |
| AWG number as coded connectable conductor cross section for main contacts | 14 ... 10                                                                               |
| <b>tightening torque</b>                                                  |                                                                                         |
| • for main contacts with screw-type terminals                             | 2 ... 2.5 N·m                                                                           |

|                                                                                                                                                                     |                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <ul style="list-style-type: none"> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>                                                      | 0.5 ... 0.6 N·m                         |
| <b>tightening torque [lbf·in]</b>                                                                                                                                   |                                         |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul> | 7 ... 10.3 lbf·in<br>4.5 ... 5.3 lbf·in |
| <b>design of the thread of the connection screw</b>                                                                                                                 |                                         |
| <ul style="list-style-type: none"> <li>for main contacts</li> <li>of the auxiliary and control contacts</li> </ul>                                                  | M4<br>M3                                |
| <b>stripped length of the cable</b>                                                                                                                                 |                                         |
| <ul style="list-style-type: none"> <li>for main contacts</li> <li>for auxiliary and control contacts</li> </ul>                                                     | 7 mm<br>7 mm                            |

#### Safety related data

|                                                                |                                                  |
|----------------------------------------------------------------|--------------------------------------------------|
| <b>protection class IP on the front according to IEC 60529</b> | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

#### Ambient conditions

|                                                                                            |                                  |
|--------------------------------------------------------------------------------------------|----------------------------------|
| installation altitude at height above sea level maximum                                    | 1 000 m                          |
| <b>ambient temperature</b>                                                                 |                                  |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul> | -25 ... +60 °C<br>-55 ... +80 °C |

#### Electromagnetic compatibility

|                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>conducted interference</b>                                                                                                                                                                                                                                                                       |                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> <li>due to conductor-earth surge according to IEC 61000-4-5</li> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> <li>due to high-frequency radiation according to IEC 61000-4-6</li> </ul> | 2 kV / 5 kHz behavior criterion 2<br>2 kV behavior criterion 2<br>1 kV behavior criterion 2<br>140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1 |
| <b>field-based interference according to IEC 61000-4-3</b>                                                                                                                                                                                                                                          | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1                                                                                                                        |
| <b>electrostatic discharge according to IEC 61000-4-2</b>                                                                                                                                                                                                                                           | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2                                                                                                |
| <b>conducted HF interference emissions according to CISPR11</b>                                                                                                                                                                                                                                     | Class A for industrial environment                                                                                                                                   |
| <b>field-bound HF interference emission according to CISPR11</b>                                                                                                                                                                                                                                    | Class B for the domestic, business and commercial environments                                                                                                       |

#### Short-circuit protection, design of the fuse link

|                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| manufacturer's article number <ul style="list-style-type: none"> <li>of full range R fuse link for semiconductor protection at NH design usable</li> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul> | <a href="#">3NE1020-2</a><br><a href="#">3NE8020-1</a><br><a href="#">3NC2280</a>                                                                                                                      |
| manufacturer's article number of the gG fuse <ul style="list-style-type: none"> <li>at NH design usable</li> <li>at cylindrical design 22 x 58 mm usable</li> </ul>                                                                                                                                                                              | <a href="#">3NA6812</a> ; These fuses have a smaller rated current than the semiconductor relays<br><a href="#">3NW6212-1</a> ; These fuses have a smaller rated current than the semiconductor relays |
| manufacturer's article number <ul style="list-style-type: none"> <li>of NEOZED fuse usable</li> </ul>                                                                                                                                                                                                                                            | <a href="#">5SE2335</a> ; These fuses have a smaller rated current than the semiconductor relays                                                                                                       |

#### Certificates/ approvals


|                                 |            |                                  |
|---------------------------------|------------|----------------------------------|
| <b>General Product Approval</b> | <b>EMC</b> | <b>Declaration of Conformity</b> |
|---------------------------------|------------|----------------------------------|




[Confirmation](#)



|                                  |                          |              |
|----------------------------------|--------------------------|--------------|
| <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>other</b> |
|----------------------------------|--------------------------|--------------|

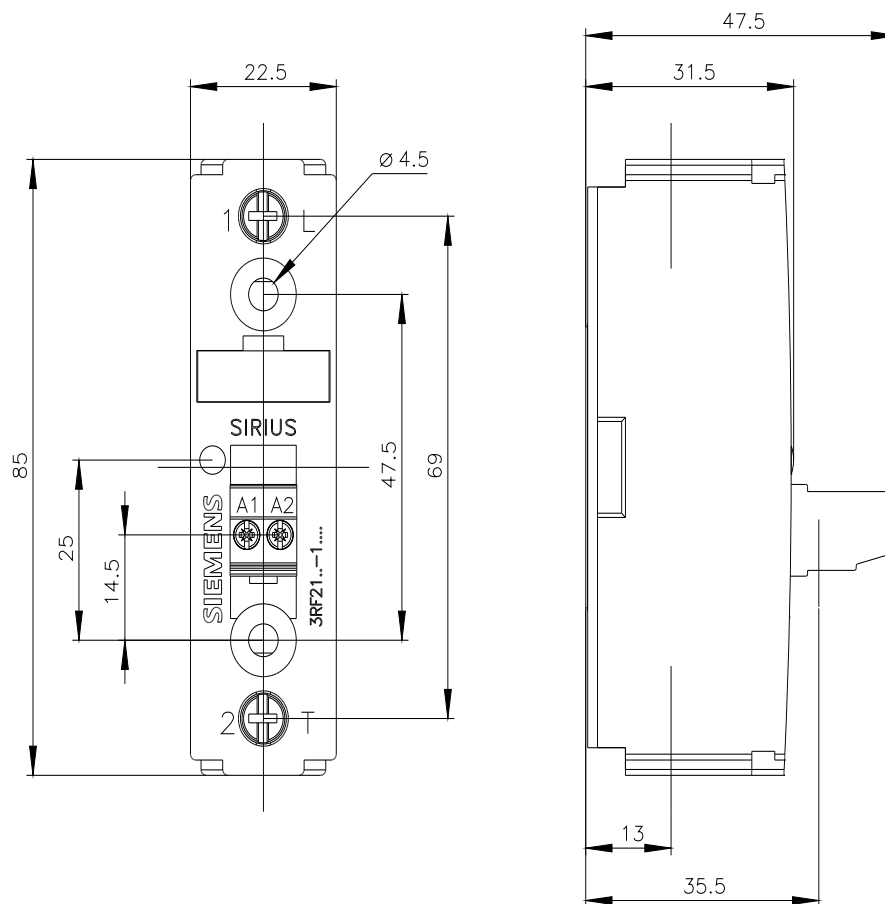**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2170-1AA45>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2170-1AA45>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3RF2170-1AA45>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2170-1AA45&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2170-1AA45&lang=en)

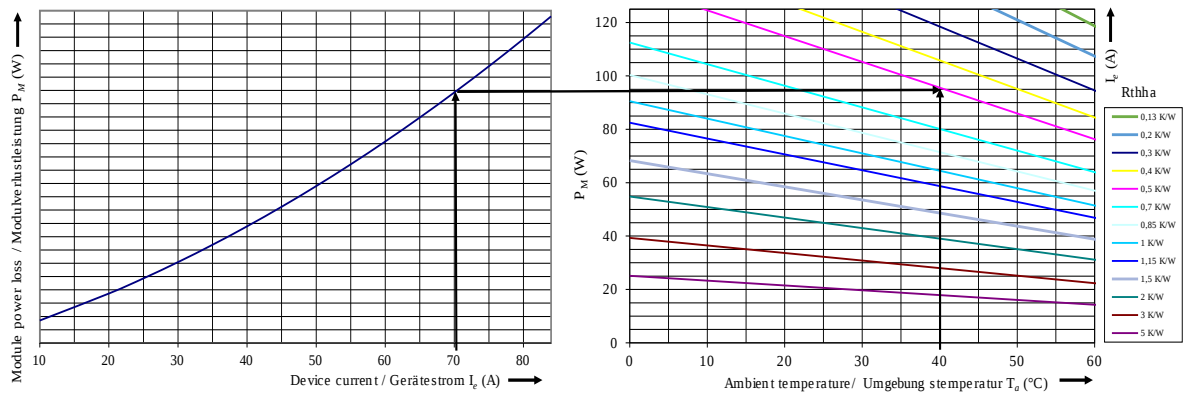

last modified:

1/12/2022