



Semiconductor relay, 1-phase 3RF2 Overall width 22.5 mm, 90 A 24-230 V / 24 V DC Spring-type terminal

|   |                               |
|---|-------------------------------|
| <b>product brand name</b>   | SIRIUS                        |
| <b>product designation</b>  | solid-state relay             |
| <b>design of the product</b>  | single-phase                  |
| <b>product type designation</b>   | 3RF21                         |
| <b>manufacturer's article number</b>  |                               |
| <ul style="list-style-type: none"> <li>• _3 of the accessories that can be ordered</li> </ul> | <a href="#">3RF2900-0EA18</a> |
| <b>product designation</b>  |                               |
| <ul style="list-style-type: none"> <li>• _3 of the accessories that can be ordered</li> </ul> | converter                     |

### General technical data

|   |                      |
|---|----------------------|
| <b>product function</b>   | zero-point switching |
| <b>power loss [V·A] maximum</b>   | 118 VA               |
| <b>power loss [W] for rated value of the current</b>                                      |                      |
| <ul style="list-style-type: none"> <li>• at AC in hot operating state</li> </ul>          | 118 W                |
| <ul style="list-style-type: none"> <li>• at AC in hot operating state per pole</li> </ul> | 118 W                |
| <ul style="list-style-type: none"> <li>• without load current share typical</li> </ul>    | 0.4 W                |
| <b>insulation voltage rated value</b>   | 600 V                |
| <b>type of voltage of the control supply voltage</b>                                      | DC                   |
| <b>surge voltage resistance of main circuit rated value</b>                               | 6 kV                 |
| <b>shock resistance according to IEC 60068-2-27</b>                                       | 15g / 11 ms          |
| <b>vibration resistance according to IEC 60068-2-6</b>                                    | 2g                   |
| <b>reference code according to IEC 81346-2</b>  | Q                    |
| <b>Substance Prohibitance (Date)</b>  | 05/28/2009           |

### Main circuit

|   |              |
|---|--------------|
| <b>number of poles for main current circuit</b>                                     | 1            |
| <b>number of NO contacts for main contacts</b>                                      | 1            |
| <b>number of NC contacts for main contacts</b>                                      | 0            |
| <b>operating voltage at AC</b>  |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>            | 24 ... 230 V |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>            | 24 ... 230 V |
| <b>operating frequency rated value</b>  | 50 ... 60 Hz |
| <b>relative symmetrical tolerance of the operating frequency</b>                    | 10 %         |
| <b>operating range relative to the operating voltage at AC</b>                      |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                        | 20 ... 253 V |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                        | 20 ... 253 V |
| <b>operational current</b>  |              |
| <ul style="list-style-type: none"> <li>• at AC-51 rated value</li> </ul>            | 20 A         |
| <ul style="list-style-type: none"> <li>• according to UL 508 rated value</li> </ul> | 20 A         |
| <b>ampacity maximum</b>   | 90 A         |
| <b>operational current minimum</b>  | 500 mA       |
| <b>rate of voltage rise at the thyristor for main contacts</b>                      | 1 000 V/μs   |
| <b>maximum permissible</b>  |              |

|  |                                       |
|--|---------------------------------------|
| <b>blocking voltage at the thyristor for main contacts maximum permissible</b> | 800 V                                 |
| <b>reverse current of the thyristor</b>  | 10 mA                                 |
| <b>derating temperature</b>  | 40 °C                                 |
| <b>surge current resistance rated value</b>                                    | 1 150 A                               |
| <b>I<sup>2</sup>t value maximum</b>  | 6 600 A <sup>2</sup> ·s               |
| <b>Control circuit/ Control</b>  |                                       |
| <b>type of voltage of the control supply voltage</b>                           | DC                                    |
| <b>control supply voltage 1</b>  |                                       |
| • at DC rated value  | 30 V                                  |
| • at DC  | 15 ... 24 V                           |
| <b>control supply voltage</b>  |                                       |
| • at DC initial value for signal <1> detection                                 | 15 V                                  |
| • at DC full-scale value for signal<0> recognition                             | 5 V                                   |
| <b>control current at minimum control supply voltage</b>                       |                                       |
| • at DC  | 13 mA                                 |
| control current at DC rated value  | 15 mA                                 |
| <b>ON-delay time</b>   | 1 ms; additionally max. one half-wave |
| <b>OFF-delay time</b>  | 1 ms; additionally max. one half-wave |
| <b>Auxiliary circuit</b>   |                                       |
| <b>number of NC contacts for auxiliary contacts</b>                            | 0                                     |
| <b>number of NO contacts for auxiliary contacts</b>                            | 0                                     |
| <b>number of CO contacts for auxiliary contacts</b>                            | 0                                     |
| <b>Installation/ mounting/ dimensions</b>                                      |                                       |
| <b>fastening method</b>  | screw fixing                          |
| • side-by-side mounting  | Yes                                   |
| <b>design of the thread of the screw for securing the equipment</b>            | M4                                    |
| <b>tightening torque of fixing screw maximum</b>                               | 1.5 N·m                               |
| <b>tightening torque [lbf·in] of fixing screw maximum</b>                      | 13 lbf·in                             |
| <b>height</b>  | 85 mm                                 |
| <b>width</b>   | 22.5 mm                               |
| <b>depth</b>   | 48 mm                                 |
| <b>Connections/ Terminals</b>  |                                       |
| <b>type of electrical connection</b>   |                                       |
| • for main current circuit   | spring-loaded terminals               |
| • for auxiliary and control circuit  | spring-loaded terminals               |
| <b>type of connectable conductor cross-sections</b>                            |                                       |
| • for main contacts  |                                       |
| — solid  | 2x (0.5 ... 2.5 mm <sup>2</sup> )     |
| — finely stranded with core end processing                                     | 2x (0.5 ... 1.5 mm <sup>2</sup> )     |
| — finely stranded without core end processing                                  | 2x (0.5 ... 2.5 mm <sup>2</sup> )     |
| • at AWG cables for main contacts  | 2x (18 ... 14)                        |
| <b>connectable conductor cross-section for main contacts</b>                   |                                       |
| • solid or stranded  | 0.5 ... 2.5 mm <sup>2</sup>           |
| • finely stranded with core end processing                                     | 0.5 ... 1.5 mm <sup>2</sup>           |
| • finely stranded without core end processing                                  | 0.5 ... 2.5 mm <sup>2</sup>           |
| <b>type of connectable conductor cross-sections</b>                            |                                       |
| • for auxiliary and control contacts   |                                       |
| — solid  | 0.5 ... 1.5 mm <sup>2</sup>           |
| — finely stranded with core end processing                                     | 0.5 ... 2.5 mm <sup>2</sup>           |
| — finely stranded without core end processing                                  | 0.5 ... 2.5 mm <sup>2</sup>           |
| • at AWG cables for auxiliary and control contacts                             | 1x (AWG 20 ... 12)                    |
| AWG number as coded connectable conductor cross section for main contacts      | 18 ... 14                             |
| <b>tightening torque</b>   |                                       |
| • for main contacts with screw-type terminals                                  | 2 ... 2.5 N·m                         |
| <b>stripped length of the cable</b>  |                                       |
| • for main contacts  | 10 mm                                 |
| • for auxiliary and control contacts   | 10 mm                                 |
| <b>Safety related data</b>   |                                       |
| <b>protection class IP on the front according to IEC 60529</b>                 | IP20                                  |

|  |  |
|--|--|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|--|--|

#### Ambient conditions

|   |                |
|---|----------------|
| installation altitude at height above sea level maximum | 1 000 m        |
| <b>ambient temperature</b>                              |                |
| • during operation                                      | -25 ... +60 °C |
| • during storage  | -55 ... +80 °C |

#### Electromagnetic compatibility

|  |   |
|--|---|
| <b>conducted interference</b>                                    |   |
| • due to burst according to IEC 61000-4-4                        | 2 kV / 5 kHz behavior criterion 2                                     |
| • due to conductor-earth surge according to IEC 61000-4-5        | 2 kV behavior criterion 2   |
| • due to conductor-conductor surge according to IEC 61000-4-5    | 1 kV behavior criterion 2   |
| • due to high-frequency radiation according to IEC 61000-4-6     | 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1 |
| <b>field-based interference according to IEC 61000-4-3</b>       | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1                         |
| <b>electrostatic discharge according to IEC 61000-4-2</b>        | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 |
| <b>conducted HF interference emissions according to CISPR11</b>  | Class A for industrial environment                                    |
| <b>field-bound HF interference emission according to CISPR11</b> | Class B for the domestic, business and commercial environments        |

#### Short-circuit protection, design of the fuse link

|   |  |
|---|--|
| manufacturer's article number   |  |
| • of full range R fuse link for semiconductor protection at NH design usable                  | <a href="#">3NE1021-2</a>  |
| • of back-up R fuse link for semiconductor protection at NH design usable                     | <a href="#">3NE8021-1</a>  |
| • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable | <a href="#">3NC2200</a>  |
| manufacturer's article number of the gG fuse  |  |
| • at NH design usable   | <a href="#">3NA6817</a> ; These fuses have a smaller rated current than the semiconductor relays   |
| • at cylindrical design 22 x 58 mm usable   | <a href="#">3NW6217-1</a> ; These fuses have a smaller rated current than the semiconductor relays |
| manufacturer's article number   |  |
| • of DIAZED fuse usable   | <a href="#">5SB4111</a> ; These fuses have a smaller rated current than the semiconductor relays   |
| • of NEOZED fuse usable   | <a href="#">5SE2335</a> ; These fuses have a smaller rated current than the semiconductor relays   |

#### Certificates/ approvals

|                          |     |                           |
|--------------------------|-----|---------------------------|
| General Product Approval | EMC | Declaration of Conformity |
|--------------------------|-----|---------------------------|



[Confirmation](#)



|                           |                   |       |         |
|---------------------------|-------------------|-------|---------|
| Declaration of Conformity | Test Certificates | other | Railway |
|---------------------------|-------------------|-------|---------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)


[Confirmation](#)





[Vibration and Shock](#)

#### Further information

|   |
|---|
| Information on the packaging  |
| <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                       |
| Information- and Downloadcenter (Catalogs, Brochures,...)   |
| <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>   |
| Industry Mall (Online ordering system)  |
| <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2190-2AA02">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2190-2AA02</a> |

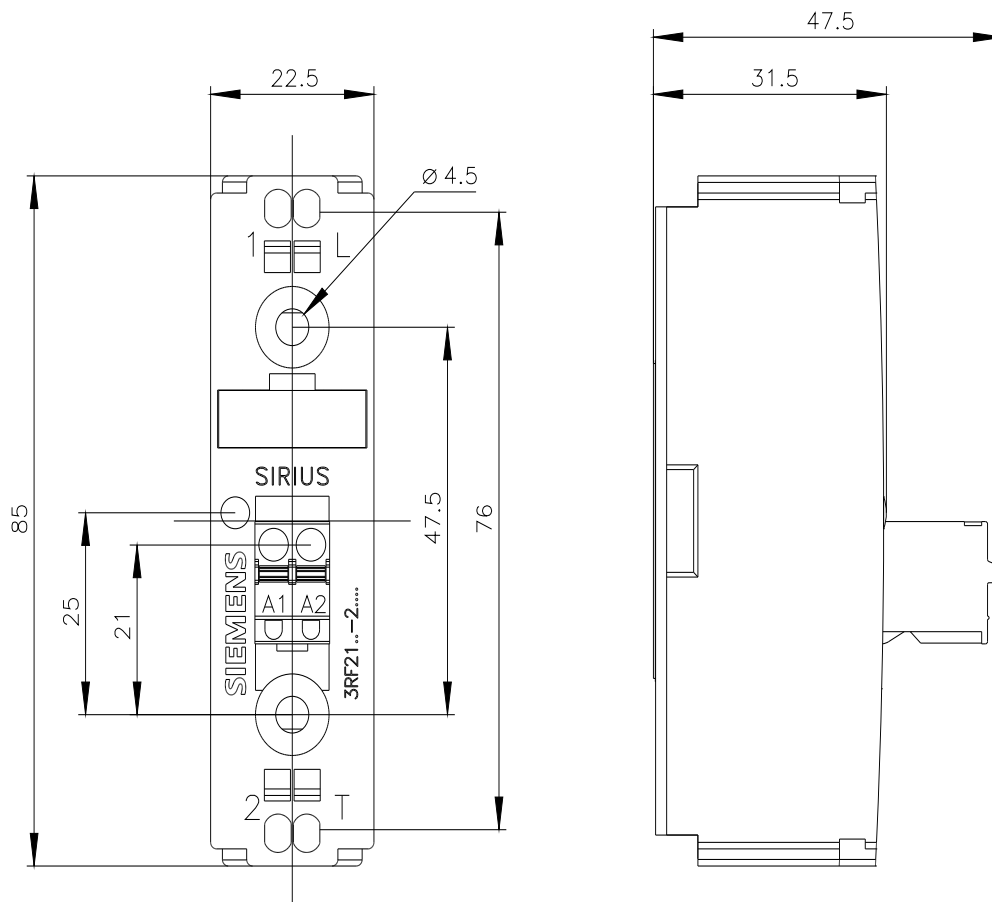

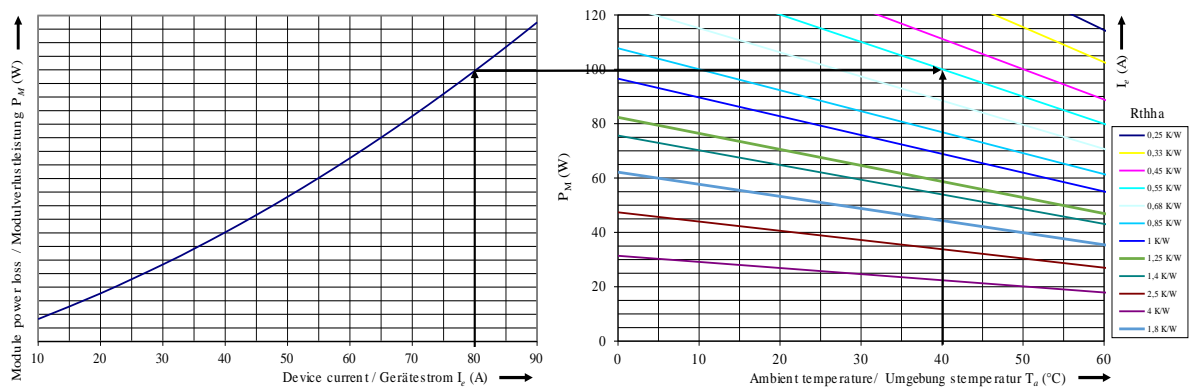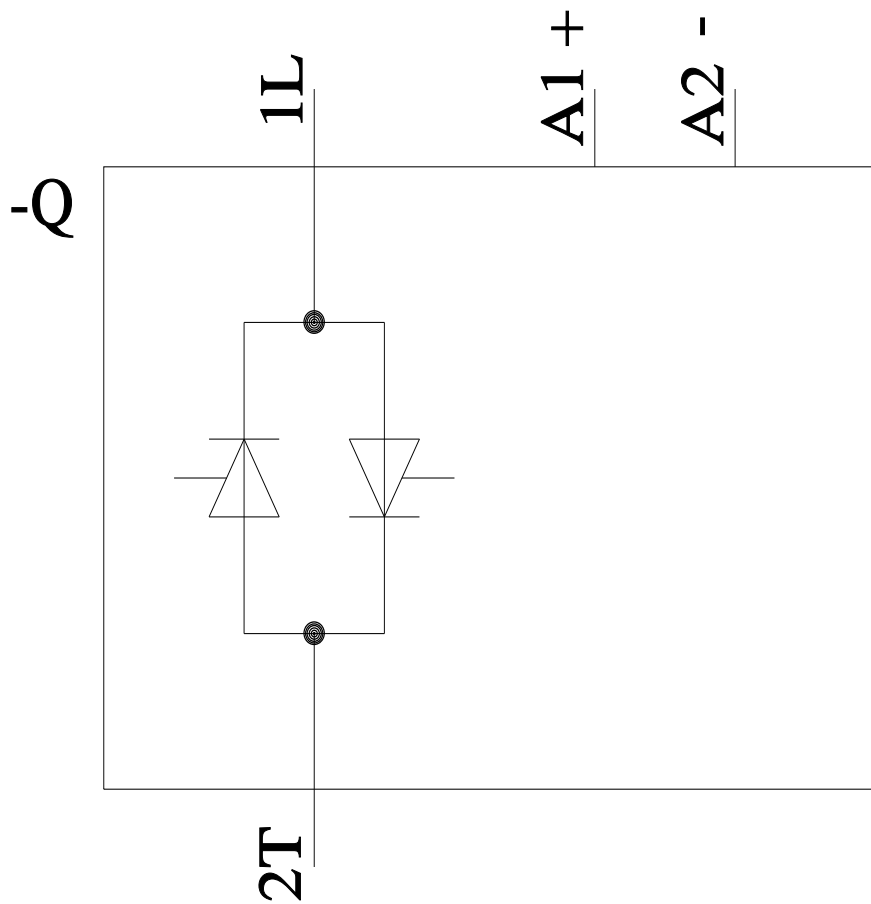

last modified:

1/12/2022