



Semiconductor relay, 3-phase 3RF2 55 A / 40 °C 48-600 V / 4-30 V DC 2-phase controlled Ring cable connection Blocking voltage 1200 V

product brand name
product designation
design of the product
product type designation
manufacturer's article number
 • _2 of the accessories that can be ordered
product designation
 • _2 of the accessories that can be ordered

SIRIUS
 solid-state relay
 two-phase controlled
 3RF22
[3RF2900-0EA18](#)
 converter

General technical data

product function zero-point switching
power loss [W] for rated value of the current
 • at AC in hot operating state 151 W
 • at AC in hot operating state per pole 151 W
 • without load current share typical 0.5 W
insulation voltage rated value 600 V
 type of voltage of the control supply voltage DC
 surge voltage resistance of main circuit rated value 6 kV
shock resistance according to IEC 60068-2-27 15g / 11 ms
vibration resistance according to IEC 60068-2-6 2g
reference code according to IEC 81346-2 Q
Substance Prohibitance (Date) 07/01/2006

Main circuit

number of poles for main current circuit 3
number of NO contacts for main contacts 2
number of NC contacts for main contacts 0
operating voltage at AC
 • at 50 Hz rated value 48 ... 600 V
 • at 60 Hz rated value 48 ... 600 V
operating frequency rated value 50 ... 60 Hz
relative symmetrical tolerance of the operating frequency 10 %
operating range relative to the operating voltage at AC
 • at 50 Hz 40 ... 660 V
 • at 60 Hz 40 ... 660 V
operational current
 • at AC-51 rated value 50 A
 • according to UL 508 rated value 55 A
ampacity maximum 55 A
operational current minimum 500 mA
rate of voltage rise at the thyristor for main contacts 100 V/μs
maximum permissible
blocking voltage at the thyristor for main contacts 1 200 V

maximum permissible reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I ² t value maximum	1 800 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC	4 ... 30 V
control supply voltage	
• at DC initial value for signal <1> detection	4 V
• at DC full-scale value for signal<0> recognition	1 V
control current at minimum control supply voltage	
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
• side-by-side mounting	Yes
design of the thread of the screw for securing the equipment	M4
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	95 mm
width	45 mm
depth	47 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	Ring cable lug connection
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 ... 22 lbf·in
• for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in
design of the thread of the connection screw	
• for main contacts	M4
• of the auxiliary and control contacts	M3
stripped length of the cable	
• for main contacts	7 mm
• for auxiliary and control contacts	7 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP00
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Electromagnetic compatibility

conducted interference

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

2 kV / 5 kHz behavior criterion 2

2 kV behavior criterion 2

1 kV behavior criterion 2

140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1

electrostatic discharge according to IEC 61000-4-2

4 kV contact discharging / 8 kV air discharging, behavior criterion 2

conducted HF interference emissions according to CISPR11

Class A for industrial environment

field-bound HF interference emission according to CISPR11

Class A for industrial environment

Short-circuit protection, design of the fuse link

manufacturer's article number

- of full range R fuse link for semiconductor protection at NH design usable
- of back-up R fuse link for semiconductor protection at NH design usable
- of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable

[3NE1803-0](#); These fuses have a smaller rated current than the semiconductor relays

[3NE8018-1](#)

[3NC1450](#); These fuses have a smaller rated current than the semiconductor relays

[3NC2250](#); These fuses have a smaller rated current than the semiconductor relays

manufacturer's article number of the gG fuse at NH design usable

- up to 460 V

[3NA3807-6](#); These fuses have a smaller rated current than the semiconductor relays

- up to 600 V

[3NA3805-6](#); These fuses have a smaller rated current than the semiconductor relays

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



[Confirmation](#)



Declaration of Conformity

Test Certificates

other



[Type Test Certificates/Test Report](#)

[Confirmation](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2255-3AB45>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2255-3AB45>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2255-3AB45>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2255-3AB45&lang=en

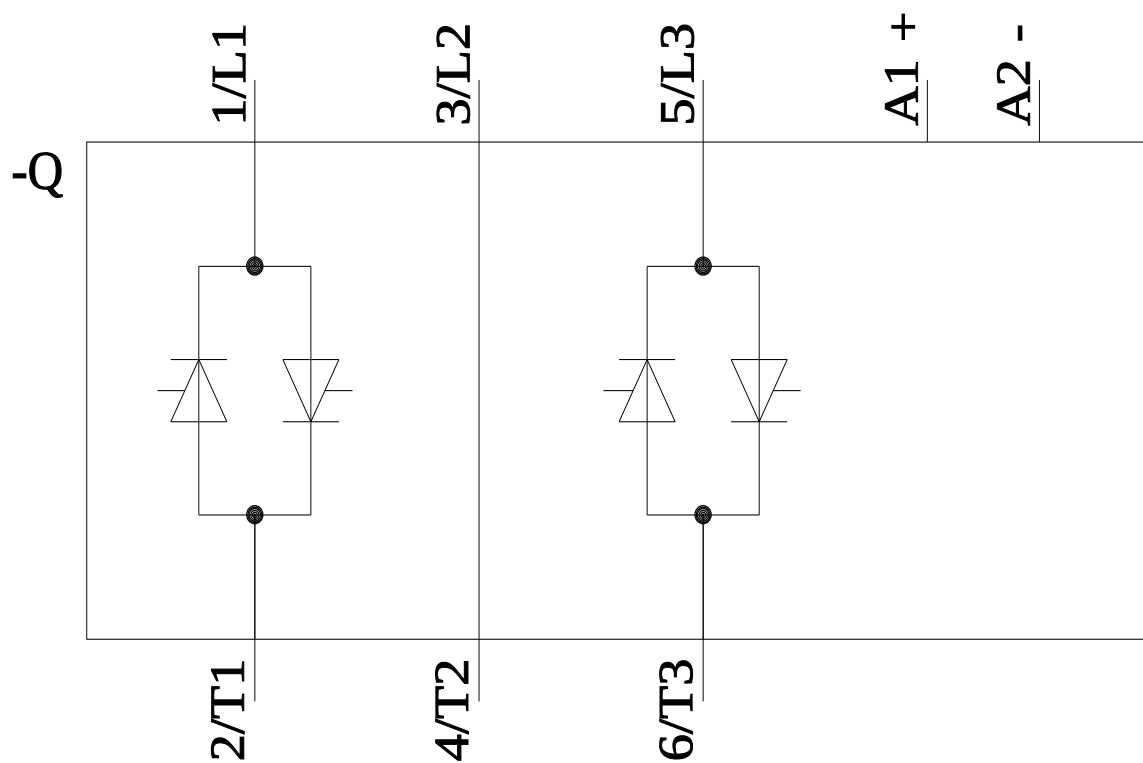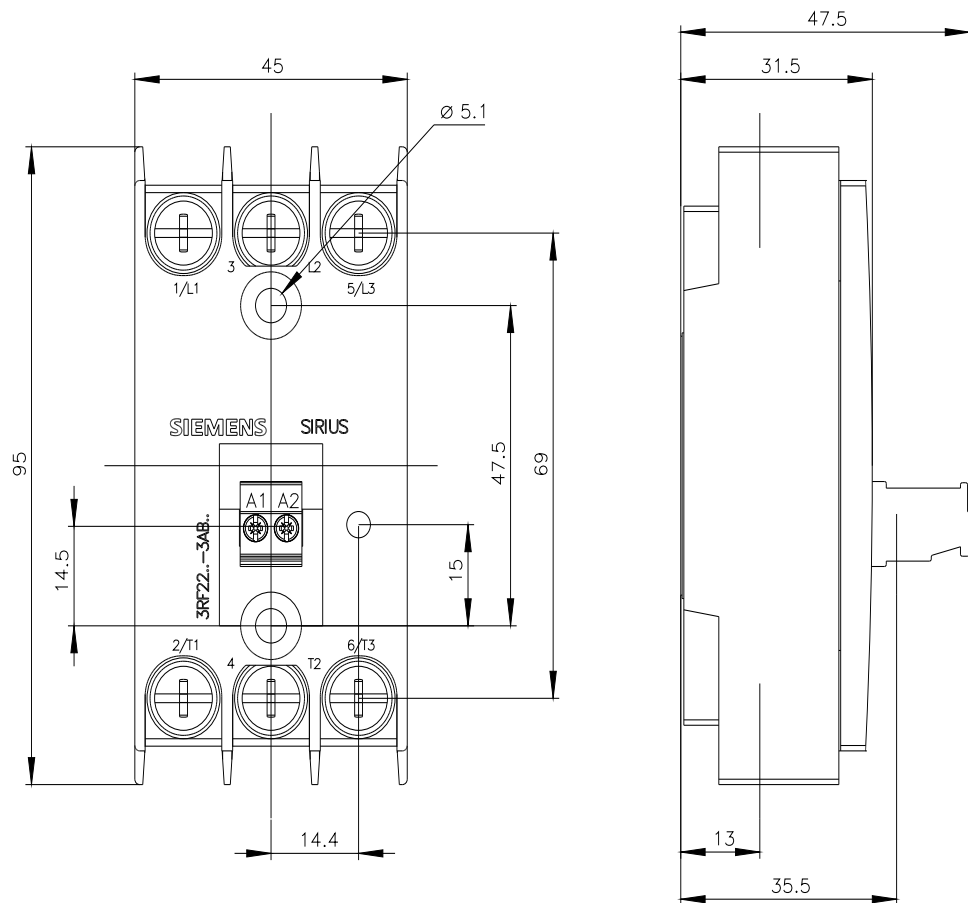

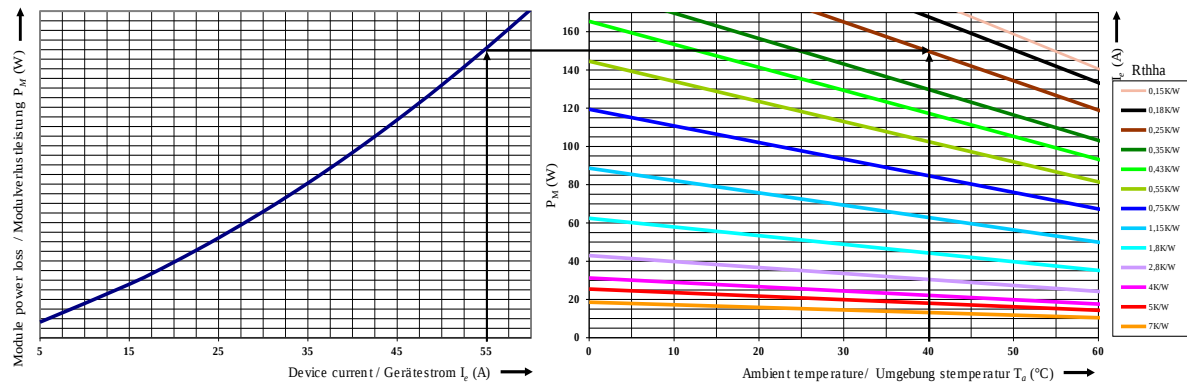

last modified:

3/4/2021