



Solid-state contactor 1-phase 3RF2 AC 51 / 30 A / 40 °C 24-230 V / 110-230 V AC screw terminal

### product brand name

SIRIUS

### product designation

solid-state contactor

### design of the product

single-phase

### product type designation

3RF23

### manufacturer's article number

- \_1 of the accessories that can be ordered
- \_4 of the accessories that can be ordered

[3RF2900-3PA88](#)

[3RF2950-0GA33](#)

### product designation

- \_1 of the accessories that can be ordered
- \_4 of the accessories that can be ordered

terminal cover

load monitoring

### General technical data

#### product function

zero-point switching

#### power loss [W] for rated value of the current without load current share typical

3.5 W

#### insulation voltage rated value

600 V

#### degree of pollution

3

#### type of voltage of the control supply voltage

AC

#### surge voltage resistance of main circuit rated value

6 kV

#### shock resistance according to IEC 60068-2-27

15g / 11 ms

#### vibration resistance according to IEC 60068-2-6

2g

#### reference code according to IEC 81346-2

Q

#### Substance Prohibitance (Date)

07/01/2006

### Main circuit

#### number of poles for main current circuit

1

#### number of NO contacts for main contacts

1

#### number of NC contacts for main contacts

0

#### operating voltage at AC

- at 50 Hz rated value
- at 60 Hz rated value

24 ... 230 V

24 ... 230 V

#### operating frequency rated value

50 ... 60 Hz

#### operating range relative to the operating voltage at AC

- at 50 Hz
- at 60 Hz

20 ... 253 V

20 ... 253 V

#### operational current

- at AC-51 rated value
- at AC-51 according to IEC 60947-4-3
- according to UL 508 rated value

30 A

22 A

27 A

#### operational current minimum

500 mA






#### rate of voltage rise at the thyristor for main contacts maximum permissible

1 000 V/μs

#### blocking voltage at the thyristor for main contacts maximum permissible

800 V

reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I <sup>2</sup> t value maximum	1 800 A <sup>2</sup> ·s
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	110 ... 230 V
• at 60 Hz	110 ... 230 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at AC	
• at 50 Hz full-scale value for signal<0> recognition	40 V
• at 60 Hz full-scale value for signal<0> recognition	40 V
control supply voltage	
• at AC initial value for signal <1> detection	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
OFF-delay time	40 ms; additionally max. one half-wave
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
<b>Installation/ mounting/ dimensions</b>	
fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
• side-by-side mounting	Yes
height	95 mm
width	45 mm
depth	135.5 mm
<b>Connections/ Terminals</b>	
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
— finely stranded with core end processing	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
• at AWG cables for main contacts	2x (14 ... 10)
connectable conductor cross-section for main contacts	
• solid or stranded	1.5 ... 6 mm <sup>2</sup>
• finely stranded with core end processing	1 ... 10 mm <sup>2</sup>
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded without core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	10 ... 14
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 ... 22 lbf·in
• for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in
design of the thread of the connection screw	

<ul style="list-style-type: none"><li>• for main contacts</li><li>• of the auxiliary and control contacts</li></ul> <b>stripped length of the cable</b> <ul style="list-style-type: none"><li>• for main contacts</li><li>• for auxiliary and control contacts</li></ul>	M4 M3  7 mm 7 mm				
<b>Safety related data</b>					
<b>protection class IP on the front according to IEC 60529</b>	IP20				
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front				
<b>Ambient conditions</b>					
installation altitude at height above sea level maximum	1 000 m				
<b>ambient temperature</b> <ul style="list-style-type: none"><li>• during operation</li><li>• during storage</li></ul>	-25 ... +60 °C -55 ... +80 °C				
<b>Electromagnetic compatibility</b>					
<b>conducted interference</b> <ul style="list-style-type: none"><li>• due to burst according to IEC 61000-4-4</li><li>• due to conductor-earth surge according to IEC 61000-4-5</li><li>• due to conductor-conductor surge according to IEC 61000-4-5</li><li>• due to high-frequency radiation according to IEC 61000-4-6</li></ul> <b>field-based interference according to IEC 61000-4-3</b> <b>electrostatic discharge according to IEC 61000-4-2</b> <b>conducted HF interference emissions according to CISPR11</b> <b>field-bound HF interference emission according to CISPR11</b>	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2  1 kV behavior criterion 2  140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1  80 MHz ... 1 GHz 10 V/m, behavior criterion 1 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment  Class B for the domestic, business and commercial environments				
<b>Short-circuit protection, design of the fuse link</b>					
manufacturer's article number <ul style="list-style-type: none"><li>• of gS fuse for semiconductor protection at NH design usable</li><li>• of full range R fuse link for semiconductor protection at cylindrical design usable</li><li>• of back-up R fuse link for semiconductor protection at NH design usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li></ul> manufacturer's article number of the gG fuse <ul style="list-style-type: none"><li>• at NH design usable</li><li>• at cylindrical design 14 x 51 mm usable</li><li>• at cylindrical design 22 x 58 mm usable</li></ul> manufacturer's article number <ul style="list-style-type: none"><li>• of DIAZED fuse usable</li><li>• of NEOZED fuse usable</li></ul>	<a href="#">3NE1803-0</a> <a href="#">5SE1335</a> <a href="#">3NE8003-1</a> <a href="#">3NC1032</a> <a href="#">3NC1450</a> <a href="#">3NC2263</a>  <a href="#">3NA6810: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">3NW6107-1</a> <a href="#">3NW6207-1</a>  <a href="#">5SB2711: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">5SE2320: These fuses have a smaller rated current than the semiconductor relays</a>				
<b>Certificates/ approvals</b>					
<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>			
	<a href="#">Confirmation</a>				
<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>other</b>	<b>Railway</b>		

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1AA22>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2330-1AA22>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1AA22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2330-1AA22&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2330-1AA22&lang=en)

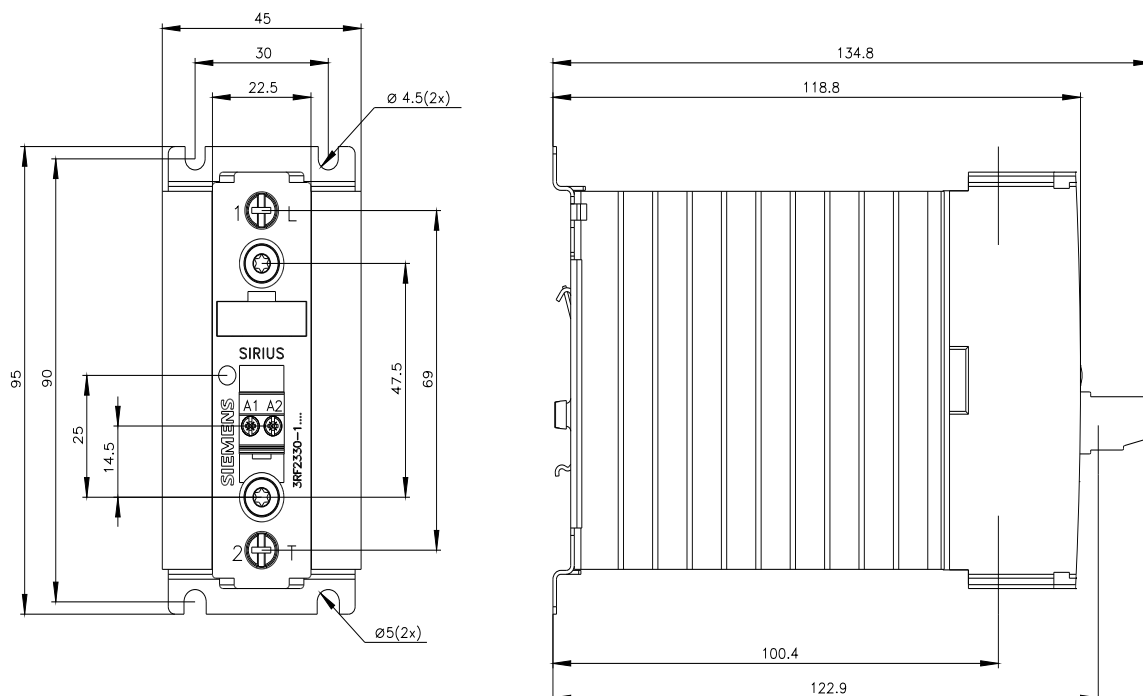

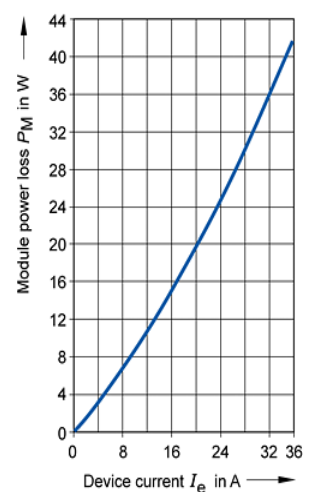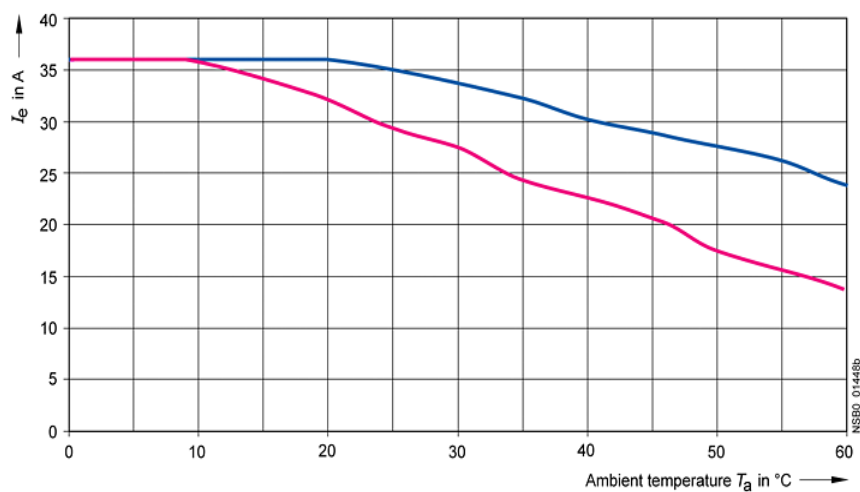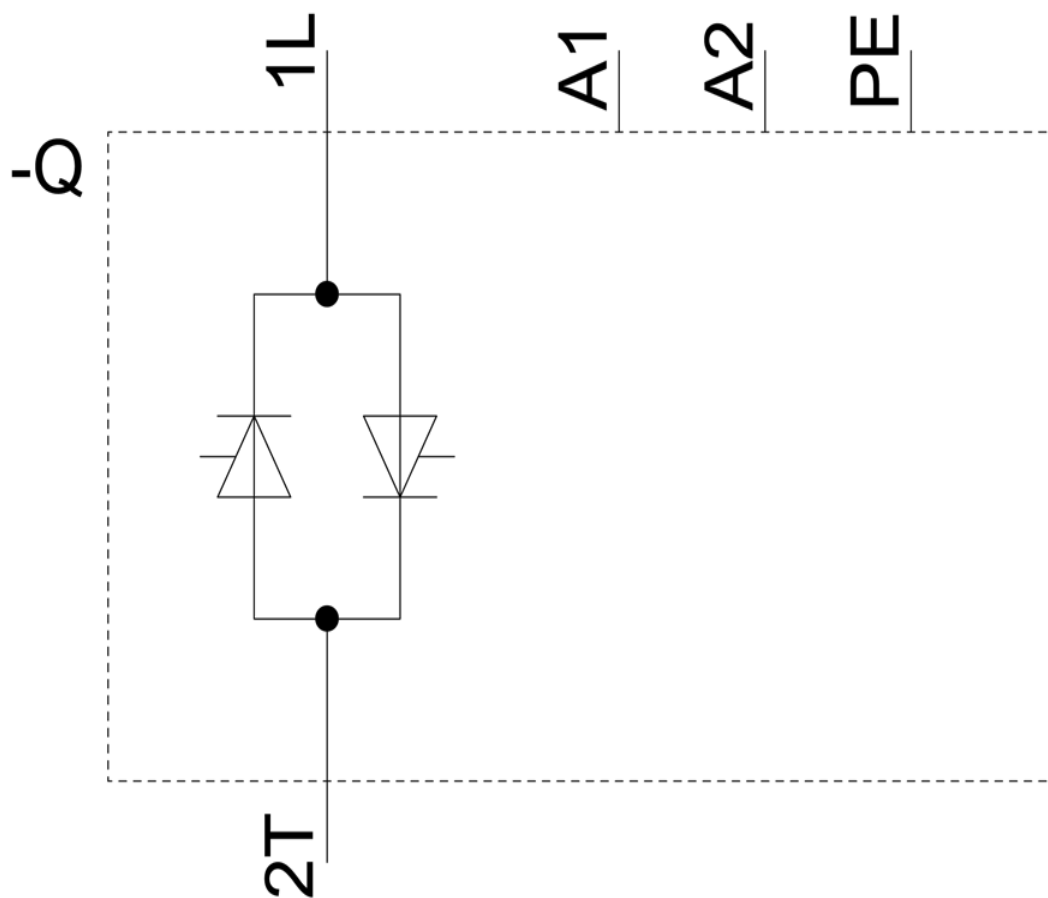

—  $I_{max}$  Thermal limit current for side-by-side mounting  
—  $I_{IEC}$  Current according to IEC 947-4-3 for side-by-side mounting

last modified:

1/26/2022

