



Solid-state contactor 1-phase 3RF2 AC 15 / 27.5 A / 40 °C 24-230 V / 24 V
DC Instantaneous switching Since 21 May 2018, the dimensions and the
drill pattern have changed, additional information in the Industry Online
Support

product brand name

product designation

design of the product

product type designation

manufacturer's article number

- _1 of the accessories that can be ordered
- _2 of the accessories that can be ordered
- _3 of the accessories that can be ordered
- _4 of the accessories that can be ordered

product designation

- _1 of the accessories that can be ordered
- _2 of the accessories that can be ordered
- _3 of the accessories that can be ordered
- _4 of the accessories that can be ordered

SIRIUS

solid-state contactor

single-phase

3RF23

[3RF2900-3PA88](#)

[3RF2990-0HA13](#)

[3RF2900-0EA18](#)

[3RF2990-0GA13](#)

terminal cover

power regulator

converter

load monitoring

General technical data

product function

instantaneous switching

power loss [W] for rated value of the current

- at AC in hot operating state
- at AC in hot operating state per pole
- without load current share typical

83 W

83 W

0.4 W

insulation voltage rated value

600 V

degree of pollution

3

type of voltage of the control supply voltage

DC

surge voltage resistance of main circuit rated value

6 kV

shock resistance according to IEC 60068-2-27

15g / 11 ms

vibration resistance according to IEC 60068-2-6

2g

reference code according to IEC 81346-2

Q

Substance Prohibitance (Date)

05/28/2009

Main circuit

number of poles for main current circuit

1

number of NO contacts for main contacts

1

number of NC contacts for main contacts

0

operating voltage at AC

- at 50 Hz rated value
- at 60 Hz rated value

24 ... 230 V

24 ... 230 V

operating frequency rated value

50 ... 60 Hz

operating range relative to the operating voltage at AC

- at 50 Hz
- at 60 Hz

20 ... 253 V








20 ... 253 V




operational current



- at AC-51 rated value

70 A

<ul style="list-style-type: none"> • at AC-51 according to IEC 60947-4-3 • according to UL 508 rated value 	70 A
operational current minimum	27.5 A
rate of voltage rise at the thyristor for main contacts	500 mA
maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts	800 V
maximum permissible	
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I²t value maximum	6 600 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
<ul style="list-style-type: none"> • at DC rated value • at DC 	30 V
control supply voltage	15 ... 24 V
<ul style="list-style-type: none"> • at DC initial value for signal <1> detection • at DC full-scale value for signal<0> recognition 	15 V
control current at minimum control supply voltage	5 V
<ul style="list-style-type: none"> • at DC 	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
<ul style="list-style-type: none"> • side-by-side mounting 	Yes
design of the thread of the screw for securing the equipment	M4
height	100 mm
width	80 mm
depth	164 mm
Connections/ Terminals	
type of electrical connection	Ring cable lug connection
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit 	ring terminal lug connection
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts for JIS cable lug • for DIN cable lug for main contacts 	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5
type of connectable conductor cross-sections	DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
<ul style="list-style-type: none"> • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
tightening torque	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
tightening torque [lbf·in]	1x (AWG 20 ... 12)
<ul style="list-style-type: none"> • for auxiliary and control contacts with screw-type terminals 	2 ... 2.5 N·m
design of the thread of the connection screw	0.5 ... 0.6 N·m
<ul style="list-style-type: none"> • for main contacts • of the auxiliary and control contacts 	4.5 ... 5.3 lbf·in
stripped length of the cable	
<ul style="list-style-type: none"> • for main contacts • for auxiliary and control contacts 	M5
	M3
	10 mm
	10 mm
Safety related data	

protection class IP on the front according to IEC 60529		IP00; IP20 with cover	
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front with cover	
Ambient conditions			
installation altitude at height above sea level maximum		1 000 m	
ambient temperature			
• during operation		-25 ... +60 °C	
• during storage		-55 ... +80 °C	
Electromagnetic compatibility			
conducted interference			
• due to burst according to IEC 61000-4-4		2 kV / 5 kHz behavior criterion 2	
• due to conductor-earth surge according to IEC 61000-4-5		2 kV behavior criterion 2	
• due to conductor-conductor surge according to IEC 61000-4-5		1 kV behavior criterion 2	
• due to high-frequency radiation according to IEC 61000-4-6		140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1	
field-based interference according to IEC 61000-4-3		80 MHz ... 1 GHz 10 V/m, behavior criterion 1	
electrostatic discharge according to IEC 61000-4-2		4 kV contact discharging / 8 kV air discharging, behavior criterion 2	
conducted HF interference emissions according to CISPR11		Class A for industrial environment	
field-bound HF interference emission according to CISPR11		Class B for the domestic, business and commercial environments	
Short-circuit protection, design of the fuse link			
manufacturer's article number			
• of gS fuse for semiconductor protection at NH design usable		3NE1820-0	
• of back-up R fuse link for semiconductor protection at NH design usable		3NE8020-1	
• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable		3NC2200	
manufacturer's article number			
• of NEOZED fuse usable		5SE2335 ; These fuses have a smaller rated current than the semiconductor relays	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
<div><div> CSA</div><div>Confirmation</div><div> UL</div><div></div><div> RCM</div><div></div></div>			
<div><div>Declaration of Conformity</div><div>Test Certificates</div><div>other</div></div>			
<div><div> EG-Konf.</div><div>Type Test Certificates/Test Report</div><div>Confirmation</div><div> VDE</div></div>			
Further information			
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875			
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10			
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2370-3BA02			
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2370-3BA02			
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RF2370-3BA02			
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2370-3BA02&lang=en			

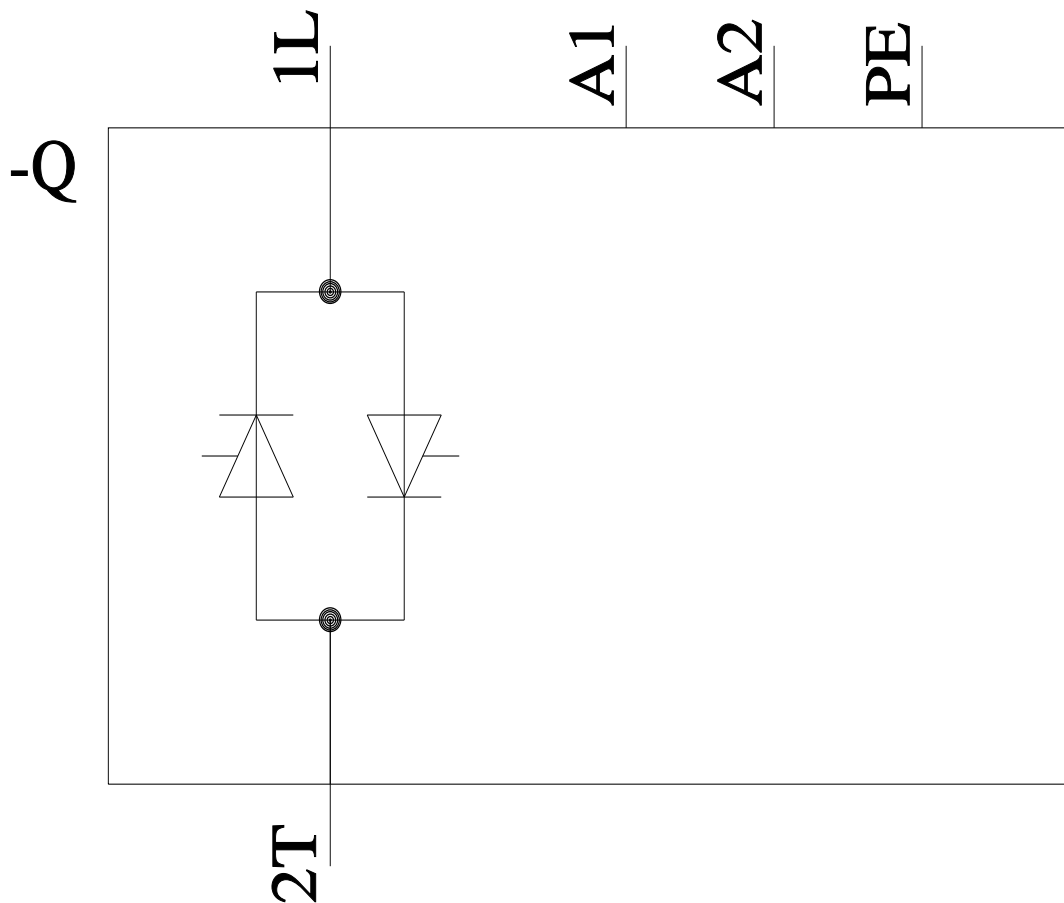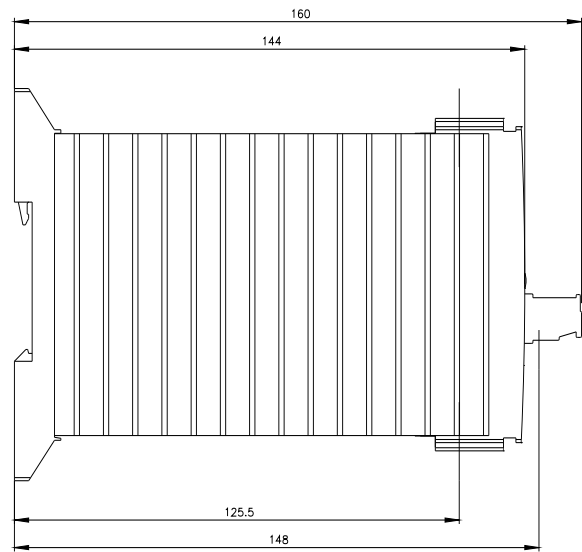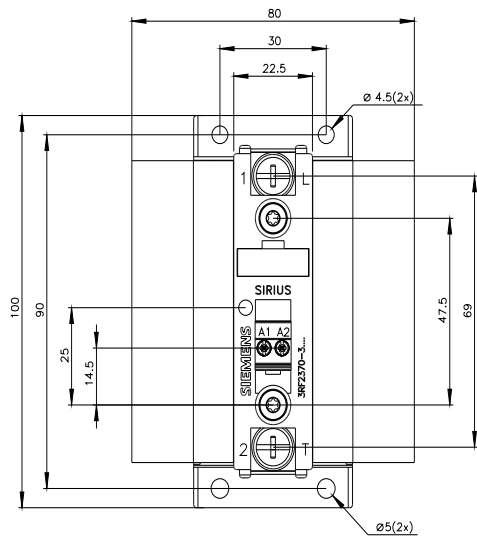

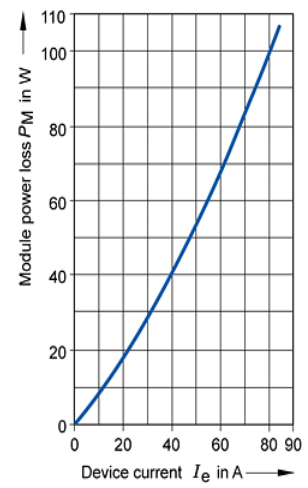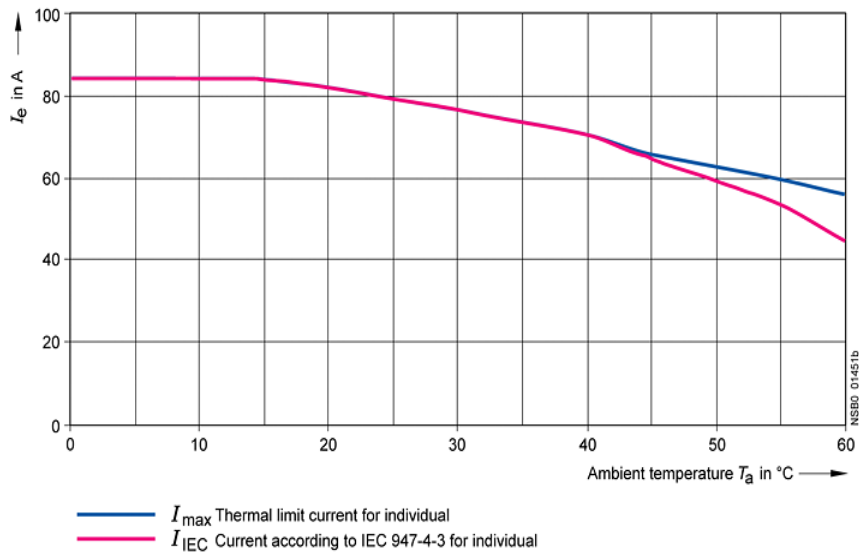

last modified:

1/26/2022