

Solid-state contactor 1-phase 3RF2 AC 15 / 30 A / 40 °C 48-460 V / 110-230 V AC Instantaneous switching Phased-out product, no successor available!

product brand name	SIRIUS
product designation	solid-state contactor
product type designation	3RF23
manufacturer's article number	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _4 of the accessories that can be ordered 	3RF2900-3PA88 3RF2950-0HA36 3RF2950-0GA36
product designation	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _4 of the accessories that can be ordered 	terminal cover power regulator load monitoring

General technical data

product function	instantaneous switching
power loss [W] for rated value of the current	
<ul style="list-style-type: none"> • at AC in hot operating state • at AC in hot operating state per pole • without load current share typical 	117 W 117 W 3.5 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009



Main circuit




number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	48 ... 460 V 48 ... 460 V
operating frequency rated value	50 ... 60 Hz
operating range relative to the operating voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	40 ... 506 V 40 ... 506 V
operational current	
<ul style="list-style-type: none"> • at AC-51 rated value • at AC-51 according to IEC 60947-4-3 • according to UL 508 rated value 	50 A 50 A 30 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts	1 000 V/μs
maximum permissible	
blocking voltage at the thyristor for main contacts	1 200 V
maximum permissible	
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I2t value maximum	6 600 A²·s

Control circuit/ Control

type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	

<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	110 ... 230 V 110 ... 230 V
control supply voltage frequency	
<ul style="list-style-type: none"> • 1 rated value • 2 rated value 	50 Hz 60 Hz
control supply voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz full-scale value for signal<0> recognition • at 60 Hz full-scale value for signal<0> recognition 	40 V 40 V
control supply voltage	
<ul style="list-style-type: none"> • at AC initial value for signal <1> detection 	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
<ul style="list-style-type: none"> • at AC 	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms
OFF-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
<ul style="list-style-type: none"> • side-by-side mounting 	Yes
design of the thread of the screw for securing the equipment	M4
height	200 mm
width	180 mm
depth	163 mm
Connections/ Terminals	
type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit 	screw-type terminals screw-type terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG cables for main contacts 	2x (1.5 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²) 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² 2x (14 ... 10)
connectable conductor cross-section for main contacts	
<ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing 	1.5 ... 6 mm ² 1 ... 10 mm ²
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary and control contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (AWG 20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	10 ... 14
tightening torque	
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	2 ... 2.5 N·m 0.5 ... 0.6 N·m
tightening torque [lbf·in]	
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	18 ... 22 lbf·in 4.5 ... 5.3 lbf·in
design of the thread of the connection screw	
<ul style="list-style-type: none"> • for main contacts • of the auxiliary and control contacts 	M4 M3
stripped length of the cable	
<ul style="list-style-type: none"> • for main contacts • for auxiliary and control contacts 	7 mm 7 mm
Safety related data	

protection class IP on the front according to IEC 60529		IP20	
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front	
Ambient conditions			
installation altitude at height above sea level maximum		1 000 m	
ambient temperature			
• during operation		-25 ... +60 °C	
• during storage		-55 ... +80 °C	
Electromagnetic compatibility			
conducted interference			
• due to burst according to IEC 61000-4-4		2 kV / 5 kHz behavior criterion 2	
• due to conductor-earth surge according to IEC 61000-4-5		2 kV behavior criterion 2	
• due to conductor-conductor surge according to IEC 61000-4-5		1 kV behavior criterion 2	
• due to high-frequency radiation according to IEC 61000-4-6		140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1	
field-based interference according to IEC 61000-4-3		80 MHz ... 1 GHz 10 V/m, behavior criterion 1	
electrostatic discharge according to IEC 61000-4-2		4 kV contact discharging / 8 kV air discharging, behavior criterion 2	
conducted HF interference emissions according to CISPR11		Class A for industrial environment	
field-bound HF interference emission according to CISPR11		Class B for the domestic, business and commercial environments	
Short-circuit protection, design of the fuse link			
manufacturer's article number			
• of full range R fuse link for semiconductor protection at NH design usable		3NE1021-2	
• of back-up R fuse link for semiconductor protection at NH design usable		3NE8021-1	
• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable		3NC2280 ; These fuses have a smaller rated current than the semiconductor relays	
manufacturer's article number			
• of NEOZED fuse usable		5SE2335 ; These fuses have a smaller rated current than the semiconductor relays	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
			
Confirmation			
UKCA		EG-Konf.	
Declaration of Conformity	Test Certificates	other	Railway
		Special Test Certificate	Confirmation
		Type Test Certificates/Test Report	
			Vibration and Shock
Further information			
Information- and Downloadcenter (Catalogs, Brochures,...)			
https://www.siemens.com/ic10			
Industry Mall (Online ordering system)			
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2390-1BA24			
Cax online generator			
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2390-1BA24			
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)			
https://support.industry.siemens.com/cs/ww/en/ps/3RF2390-1BA24			
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)			
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2390-1BA24&lang=en			

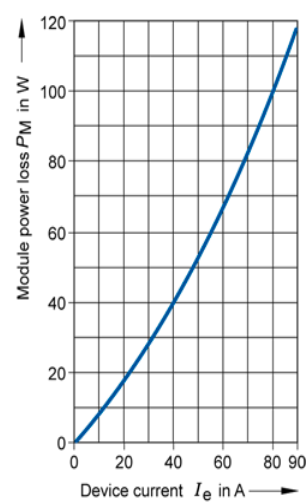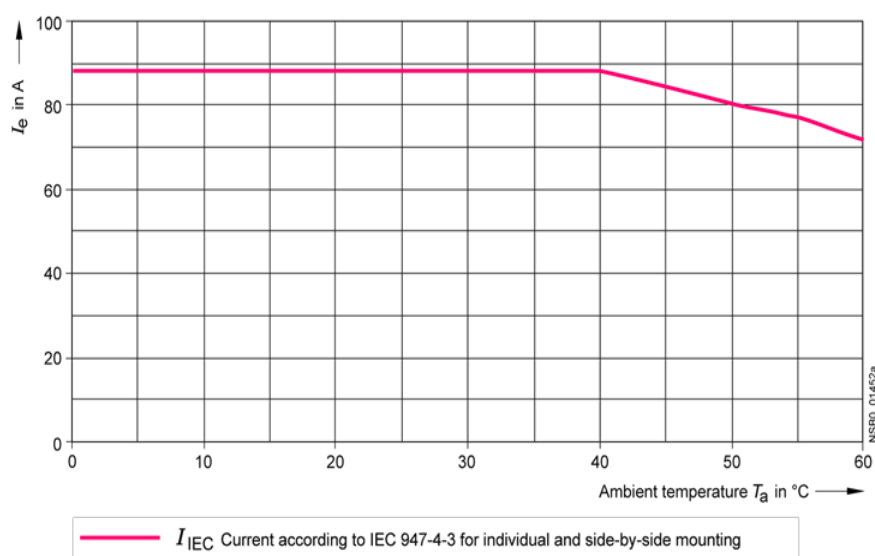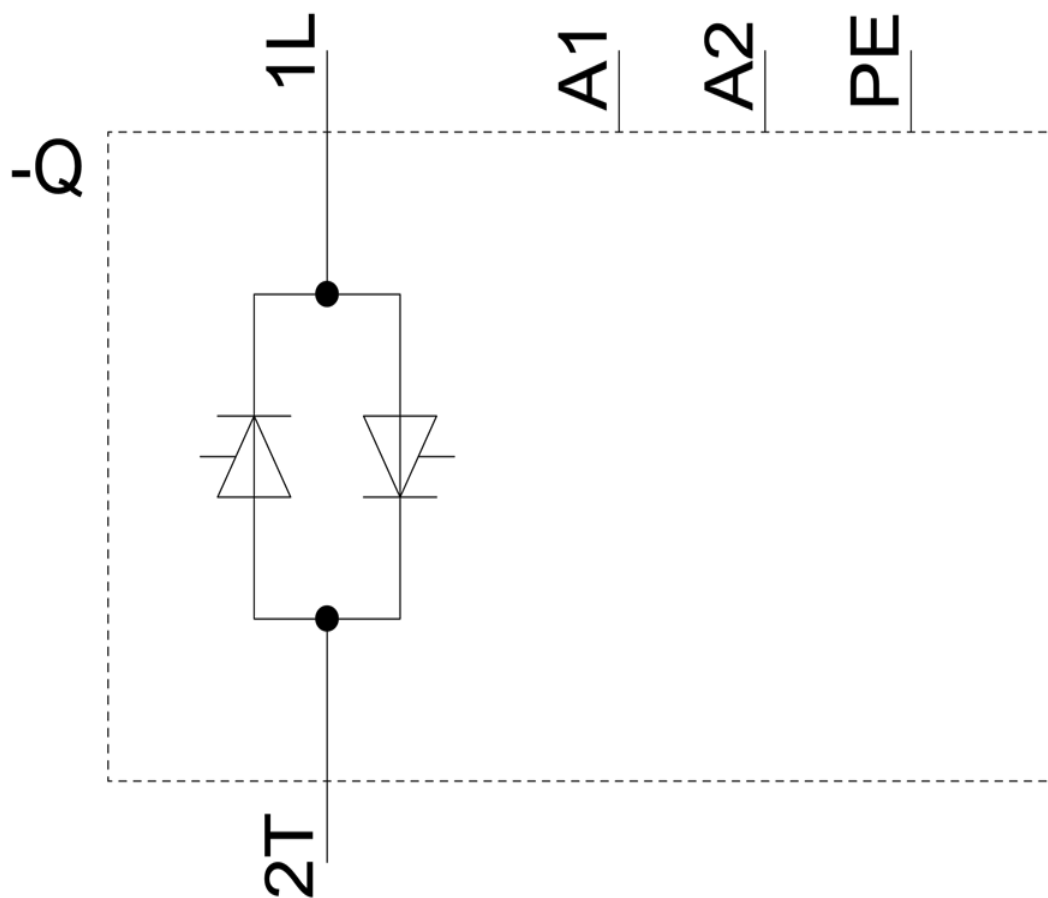

last modified:

1/12/2022