

Solid-state contactor 1-phase 3RF2 AC 15 / 30 A / 40 °C 48-600 V / 24 V
DC Instantaneous switching Phased-out product, no successor available!

product brand name	SIRIUS
product designation	solid-state contactor
product type designation	3RF23
manufacturer's article number	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered 	3RF2900-3PA88 3RF2950-0HA16 3RF2900-0EA18 3RF2950-0GA16
product designation	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered 	terminal cover power regulator converter load monitoring

General technical data

product function	instantaneous switching
power loss [W] for rated value of the current	
<ul style="list-style-type: none"> • at AC in hot operating state • at AC in hot operating state per pole • without load current share typical 	117 W 117 W 0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009

Main circuit

number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	48 ... 600 V 48 ... 600 V
operating frequency rated value	50 ... 60 Hz
operating range relative to the operating voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	40 ... 660 V 40 ... 660 V
operational current	
<ul style="list-style-type: none"> • at AC-51 rated value • at AC-51 according to IEC 60947-4-3 • according to UL 508 rated value 	50 A 50 A 30 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 600 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I²t value maximum	6 600 A ² ·s

Control circuit/ Control

type of voltage of the control supply voltage	DC
--	----

control supply voltage 1

- at DC rated value
- at DC

30 V
15 ... 24 V

control supply voltage

- at DC initial value for signal <1> detection
- at DC full-scale value for signal <0> recognition

15 V
5 V

control current at minimum control supply voltage

- at DC

13 mA

control current at DC rated value

15 mA

ON-delay time

1 ms

OFF-delay time

1 ms; additionally max. one half-wave

Auxiliary circuit

number of NC contacts for auxiliary contacts

0

number of NO contacts for auxiliary contacts

0

number of CO contacts for auxiliary contacts

0

Installation/ mounting/ dimensions**fastening method**

- side-by-side mounting

screw fixing

Yes

design of the thread of the screw for securing the equipment

M4

height

200 mm

width

180 mm

depth

163 mm

Connections/ Terminals**type of electrical connection**

- for main current circuit
- for auxiliary and control circuit

screw-type terminals

screw-type terminals

type of connectable conductor cross-sections

- for main contacts

- solid
- finely stranded with core end processing

2x (1.5 ... 2.5 mm²), 2x (2.5 ... 6 mm²)

2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), 1x 10 mm²

- at AWG cables for main contacts

2x (14 ... 10)

connectable conductor cross-section for main contacts

- solid or stranded
- finely stranded with core end processing

1.5 ... 6 mm²

1 ... 10 mm²

type of connectable conductor cross-sections

- for auxiliary and control contacts

- solid
- finely stranded with core end processing
- finely stranded without core end processing

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)

- at AWG cables for auxiliary and control contacts

1x (AWG 20 ... 12)

AWG number as coded connectable conductor cross section for main contacts

10 ... 14

tightening torque

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type terminals

2 ... 2.5 N·m

0.5 ... 0.6 N·m

tightening torque [lbf·in]

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type terminals

18 ... 22 lbf·in

4.5 ... 5.3 lbf·in

design of the thread of the connection screw

- for main contacts
- of the auxiliary and control contacts

M4

M3

stripped length of the cable

- for main contacts
- for auxiliary and control contacts

7 mm

7 mm

Safety related data

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

Ambient conditions

installation altitude at height above sea level maximum

1 000 m

ambient temperature	
<ul style="list-style-type: none"> during operation during storage 	-25 ... +60 °C -55 ... +80 °C

Electromagnetic compatibility

conducted interference	
<ul style="list-style-type: none"> due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments

Short-circuit protection, design of the fuse link

manufacturer's article number	
<ul style="list-style-type: none"> of full range R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NE1020-2 ; These fuses have a smaller rated current than the semiconductor relays 3NE8021-1 3NC2280 ; These fuses have a smaller rated current than the semiconductor relays

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------



[Confirmation](#)



Declaration of Conformity	Test Certificates	other	Railway
----------------------------------	--------------------------	--------------	----------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Confirmation](#)



[Vibration and Shock](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2390-1BA06>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2390-1BA06>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RF2390-1BA06>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2390-1BA06&lang=en

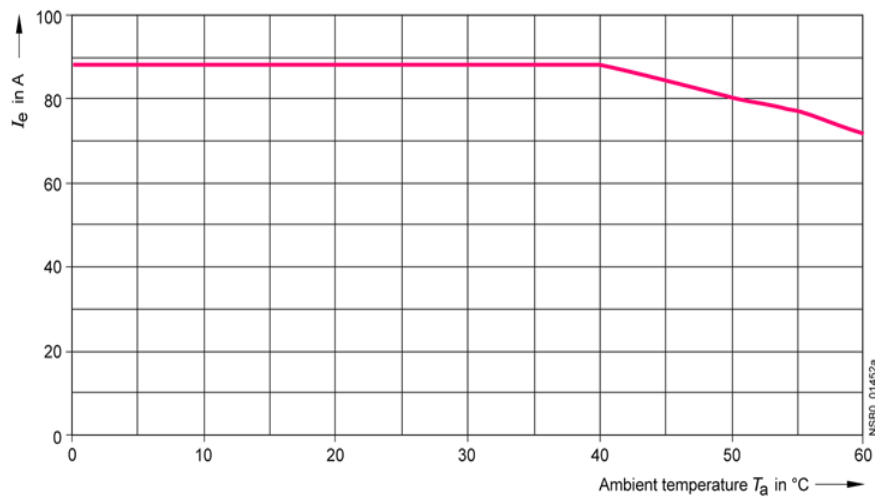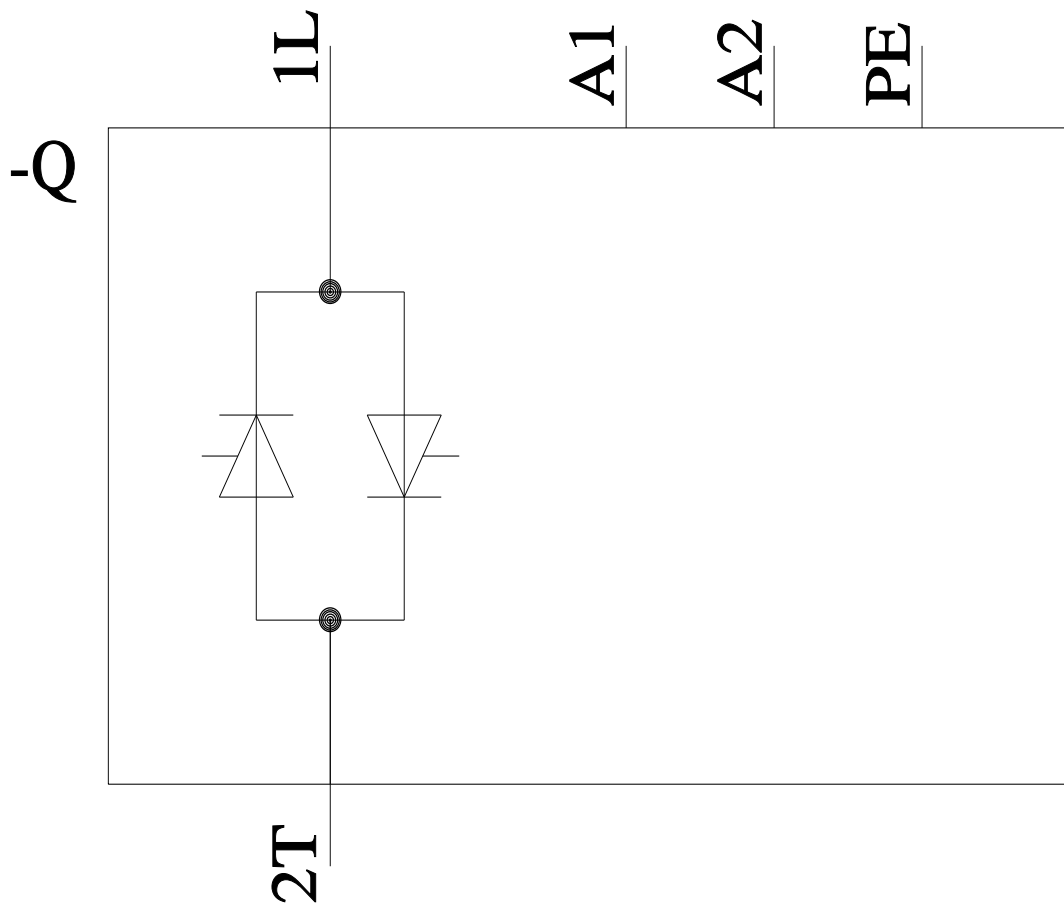

I_{IEC} Current according to IEC 947-4-3 for individual and side-by-side mounting

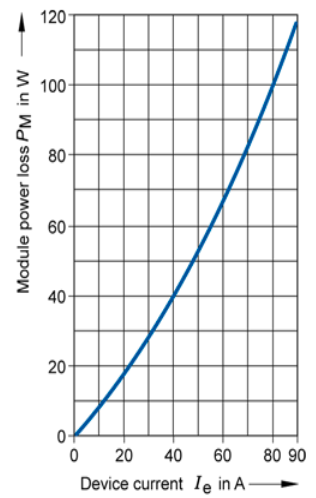

last modified:

1/12/2022