



Solid-state contactor 3-phase 3RF2 AC 51 / 20 A / 40 °C 48-600 V / 4-30 V  
DC 2-phase controlled Spring-type terminal Blocking voltage 1200 V

**product brand name**  
**product designation**  
**design of the product**  
**product type designation**  
**manufacturer's article number**  
• \_2 of the accessories that can be ordered  
**product designation**  
• \_2 of the accessories that can be ordered

SIRIUS  
solid-state contactor  
two-phase controlled  
3RF24

[3RF2900-0EA18](#)

converter

### General technical data

**product function** zero-point switching  
**power loss [W] for rated value of the current**  
• at AC in hot operating state 44 W  
• at AC in hot operating state per pole 14.67 W  
• without load current share typical 0.9 W  
**insulation voltage rated value** 600 V  
**degree of pollution** 3  
**type of voltage of the control supply voltage** DC  
**surge voltage resistance of main circuit rated value** 6 kV  
**shock resistance according to IEC 60068-2-27** 15g / 11 ms  
**vibration resistance according to IEC 60068-2-6** 2g  
**reference code according to IEC 81346-2** Q  
**Substance Prohibitance (Date)** 07/01/2006

### Main circuit

**number of poles for main current circuit** 3  
**number of NO contacts for main contacts** 2  
**number of NC contacts for main contacts** 0  
**operating voltage at AC**  
• at 50 Hz rated value 48 ... 600 V  
• at 60 Hz rated value 48 ... 600 V  
**operating frequency rated value** 50 ... 60 Hz  
**relative symmetrical tolerance of the operating frequency** 10 %  
**operating range relative to the operating voltage at AC**  
• at 50 Hz 40 ... 660 V  
• at 60 Hz 40 ... 660 V  
**operational current**  
• at AC-51 rated value 22 A  
• at AC-51 according to IEC 60947-4-3 15 A  
• according to UL 508 rated value 15 A  
**operational current minimum** 500 mA  
**rate of voltage rise at the thyristor for main contacts maximum permissible** 1 000 V/μs

<b>blocking voltage at the thyristor for main contacts</b>	1 200 V
<b>maximum permissible reverse current of the thyristor</b>	10 mA
<b>derating temperature</b>	40 °C
<b>surge current resistance rated value</b>	600 A
<b>I<sup>2</sup>t value maximum</b>	1 800 A <sup>2</sup> ·s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage 1</b>	
• at DC rated value	30 V
• at DC	4 ... 30 V
<b>control supply voltage</b>	
• at DC initial value for signal <1> detection	4 V
• at DC full-scale value for signal <0> recognition	1 V
<b>symmetrical line frequency tolerance</b>	5 Hz
<b>control current at minimum control supply voltage</b>	
• at DC	22 mA
control current at DC rated value	30 mA
<b>ON-delay time</b>	1 ms; additionally max. one half-wave
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	0
<b>number of NO contacts for auxiliary contacts</b>	0
<b>number of CO contacts for auxiliary contacts</b>	0
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b>	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
• side-by-side mounting	Yes
<b>design of the thread of the screw for securing the equipment</b>	M4
<b>height</b>	100 mm
<b>width</b>	45 mm
<b>depth</b>	117 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	spring-loaded terminals
• for auxiliary and control circuit	spring-loaded terminals
<b>type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	2x (0.5 ... 2.5 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )
— finely stranded without core end processing	2x (0.5 ... 2.5 mm <sup>2</sup> )
• at AWG cables for main contacts	2x (18 ... 14)
<b>connectable conductor cross-section for main contacts</b>	
• solid or stranded	0.5 ... 2.5 mm <sup>2</sup>
• finely stranded with core end processing	0.5 ... 1.5 mm <sup>2</sup>
• finely stranded without core end processing	0.5 ... 2.5 mm <sup>2</sup>
<b>type of connectable conductor cross-sections</b>	
• for auxiliary and control contacts	
— solid	0.5 ... 1.5 mm <sup>2</sup>
— finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup>
— finely stranded without core end processing	0.5 ... 2.5 mm <sup>2</sup>
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	14 ... 10
<b>stripped length of the cable</b>	
• for main contacts	10 mm
• for auxiliary and control contacts	10 mm
<b>Safety related data</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front
<b>Ambient conditions</b>	

installation altitude at height above sea level maximum	1 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

#### Electromagnetic compatibility

<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV behavior criterion 2
• due to high-frequency radiation according to IEC 61000-4-6	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
<b>conducted HF interference emissions according to CISPR11</b>	Class A for industrial environment
<b>field-bound HF interference emission according to CISPR11</b>	Class A for industrial environment

#### Short-circuit protection, design of the fuse link

manufacturer's article number	
• of full range R fuse link for semiconductor protection at NH design usable	<a href="#">3NE1814-0</a>
• of full range R fuse link for semiconductor protection at cylindrical design usable	<a href="#">5SE1320</a> ; Maximum operating voltage 400 V!
• of back-up R fuse link for semiconductor protection at NH design usable	<a href="#">3NE8015-1</a>
• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	<a href="#">3NC1032</a>
• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	<a href="#">3NC1450</a>
• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	<a href="#">3NC2250</a>
manufacturer's article number of the gG fuse at NH design usable	
• up to 460 V	<a href="#">3NA3805</a> ; These fuses have a smaller rated current than the semiconductor relays

#### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Confirmation](#)



Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------



[Type Test Certificates/Test Report](#)

[Confirmation](#)



#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2420-2AB45>


##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2420-2AB45>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2420-2AB45>

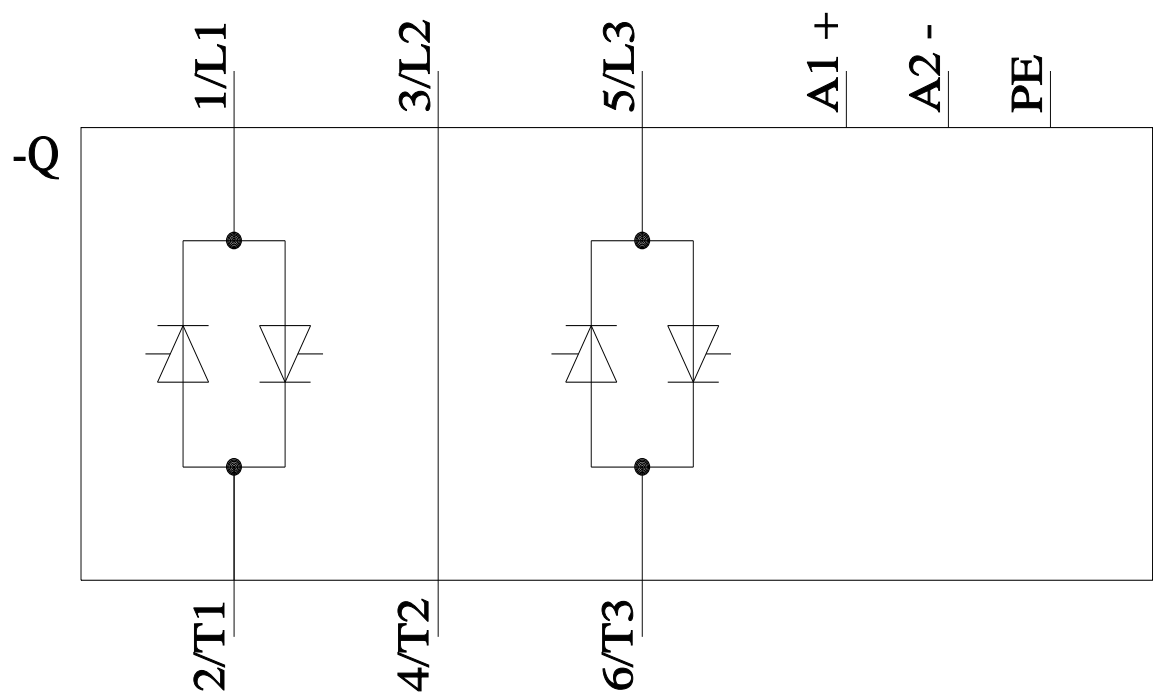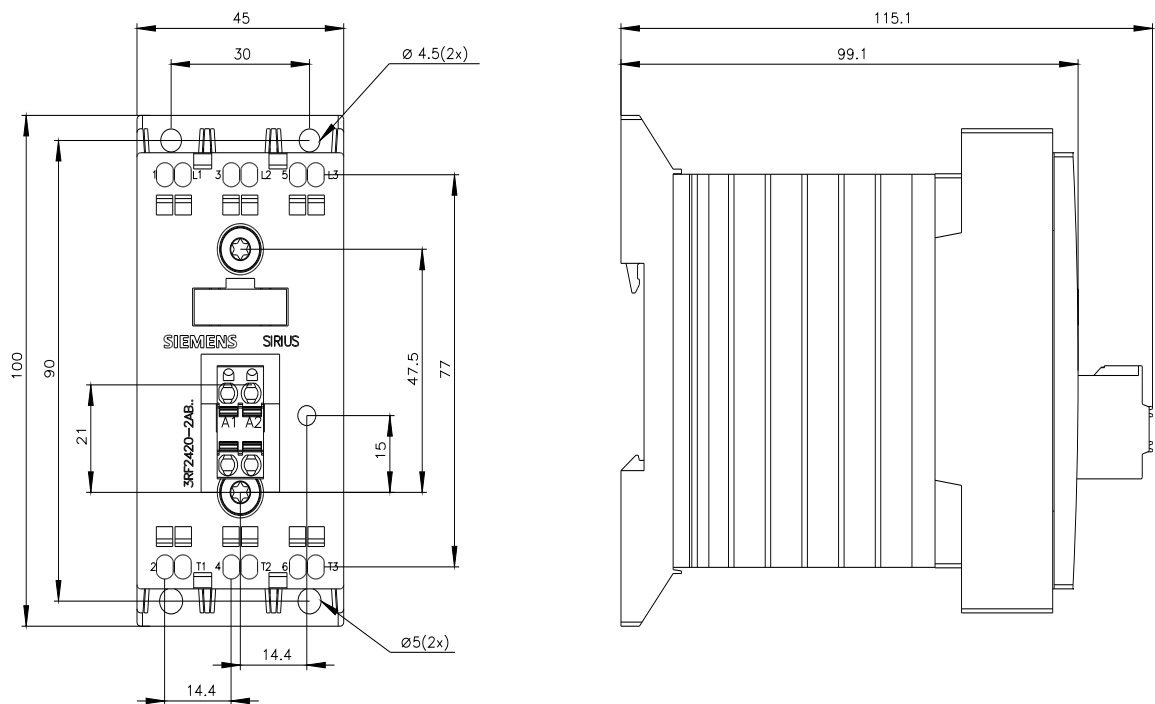

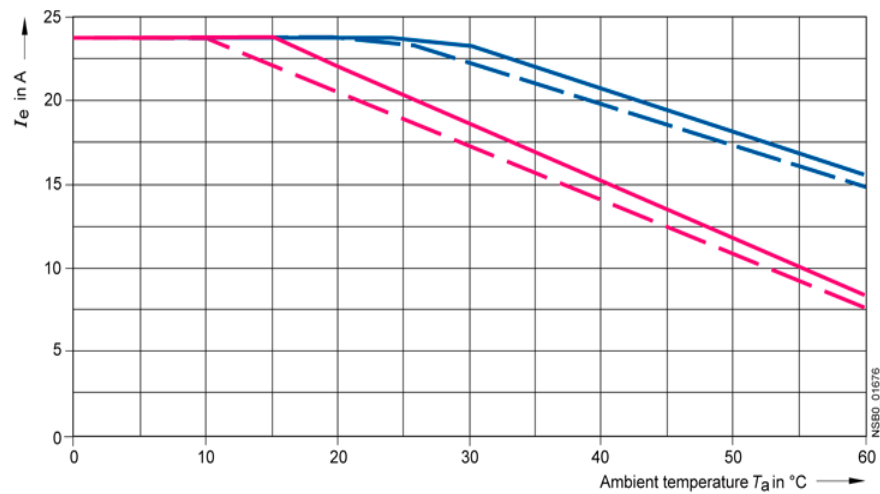

- $I_{\text{max}}$  Thermal limit current for individual mounting
- -  $I_{\text{max}}$  Thermal limit current for side-by-side mounting
- $I_{\text{IEC}}$  Current according to IEC 947-4-3 for individual mounting
- -  $I_{\text{IEC}}$  Current according to IEC 947-4-3 for side-by-side mounting

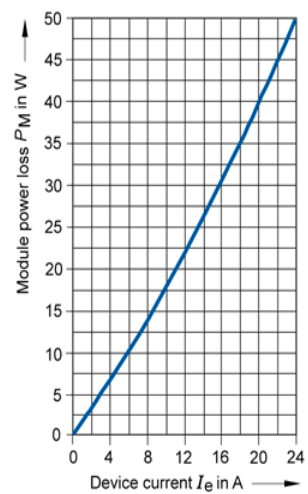

last modified:

1/26/2022