



Solid-state contactor 3-phase 3RF2 AC 51 / 50 A / 40 °C 48-600 V / 4-30 V
DC 2-phase controlled Ring cable connection Blocking voltage 1200 V

product brand name
product designation
design of the product
product type designation
manufacturer's article number
• _2 of the accessories that can be ordered
product designation
• _2 of the accessories that can be ordered

SIRIUS
solid-state contactor
two-phase controlled
3RF24
[3RF2900-0EA18](#)
converter

General technical data




product function zero-point switching
power loss [W] for rated value of the current
• at AC in hot operating state 107 W
• at AC in hot operating state per pole 35.67 W
• without load current share typical 0.9 W
insulation voltage rated value 600 V
degree of pollution 3
type of voltage of the control supply voltage DC
surge voltage resistance of main circuit rated value 6 kV
shock resistance according to IEC 60068-2-27 15g / 11 ms
vibration resistance according to IEC 60068-2-6 2g
reference code according to IEC 81346-2 Q
Substance Prohibitance (Date) 07/01/2006



Main circuit

number of poles for main current circuit 3
number of NO contacts for main contacts 2
number of NC contacts for main contacts 0
operating voltage at AC
• at 50 Hz rated value 48 ... 600 V
• at 60 Hz rated value 48 ... 600 V
operating frequency rated value 50 ... 60 Hz
relative symmetrical tolerance of the operating frequency 10 %
operating range relative to the operating voltage at AC
• at 50 Hz 40 ... 660 V
• at 60 Hz 40 ... 660 V
operational current
• at AC-51 rated value 50 A
• at AC-51 according to IEC 60947-4-3 38 A
• according to UL 508 rated value 38 A
operational current minimum 500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible 1 000 V/μs

blocking voltage at the thyristor for main contacts	1 200 V
maximum permissible reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I²t value maximum	6 600 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC rated value	30 V
• at DC	4 ... 30 V
control supply voltage	
• at DC initial value for signal <1> detection	4 V
• at DC full-scale value for signal <0> recognition	1 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
• side-by-side mounting	Yes
design of the thread of the screw for securing the equipment	M4
height	95 mm
width	119.5 mm
depth	130 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	Ring cable lug connection
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts for JIS cable lug	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5
• for DIN cable lug for main contacts	DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 ... 22 lbf·in
• for auxiliary and control contacts with screw-type terminals	7.5 ... 5.3 lbf·in
design of the thread of the connection screw	
• for main contacts	M5
• of the auxiliary and control contacts	M3
stripped length of the cable	
• for main contacts	7 mm
• for auxiliary and control contacts	7 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP00
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m

ambient temperature		-25 ... +60 °C
- during operation - during storage		-55 ... +80 °C
Electromagnetic compatibility		
conducted interference		2 kV / 5 kHz behavior criterion 2
- due to burst according to IEC 61000-4-4 - due to conductor-earth surge according to IEC 61000-4-5 - due to conductor-conductor surge according to IEC 61000-4-5 - due to high-frequency radiation according to IEC 61000-4-6		2 kV behavior criterion 2
electrostatic discharge according to IEC 61000-4-2		1 kV behavior criterion 2
conducted HF interference emissions according to CISPR11		140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
field-bound HF interference emission according to CISPR11		4 kV contact discharging / 8 kV air discharging, behavior criterion 2
		Class A for industrial environment
		Class A for industrial environment
Short-circuit protection, design of the fuse link		
manufacturer's article number		3NE1817-0
- of full range R fuse link for semiconductor protection at NH design usable - of full range R fuse link for semiconductor protection at cylindrical design usable - of back-up R fuse link for semiconductor protection at NH design usable - of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable - of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable		5SE1350; Maximum operating voltage 400 V!
manufacturer's article number of the gG fuse at NH design usable		3NE8018-1
up to 460 V		3NC1450
		3NC2280
		3NA3812; These fuses have a smaller rated current than the semiconductor relays
Certificates/ approvals		
General Product Approval		EMC
		Declaration of Conformity
 Confirmation		
		
		
		
Declaration of Conformity		Test Certificates
		other
 Type Test Certificates/Test Report		Confirmation
		
Further information		
Information on the packaging		
https://support.industry.siemens.com/cs/ww/en/view/109813875		
Information- and Downloadcenter (Catalogs, Brochures,...)		
https://www.siemens.com/ic10		
Industry Mall (Online ordering system)		
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2450-3AB45		
Cax online generator		
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2450-3AB45		
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)		
https://support.industry.siemens.com/cs/ww/en/ps/3RF2450-3AB45		
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)		
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2450-3AB45&lang=en		

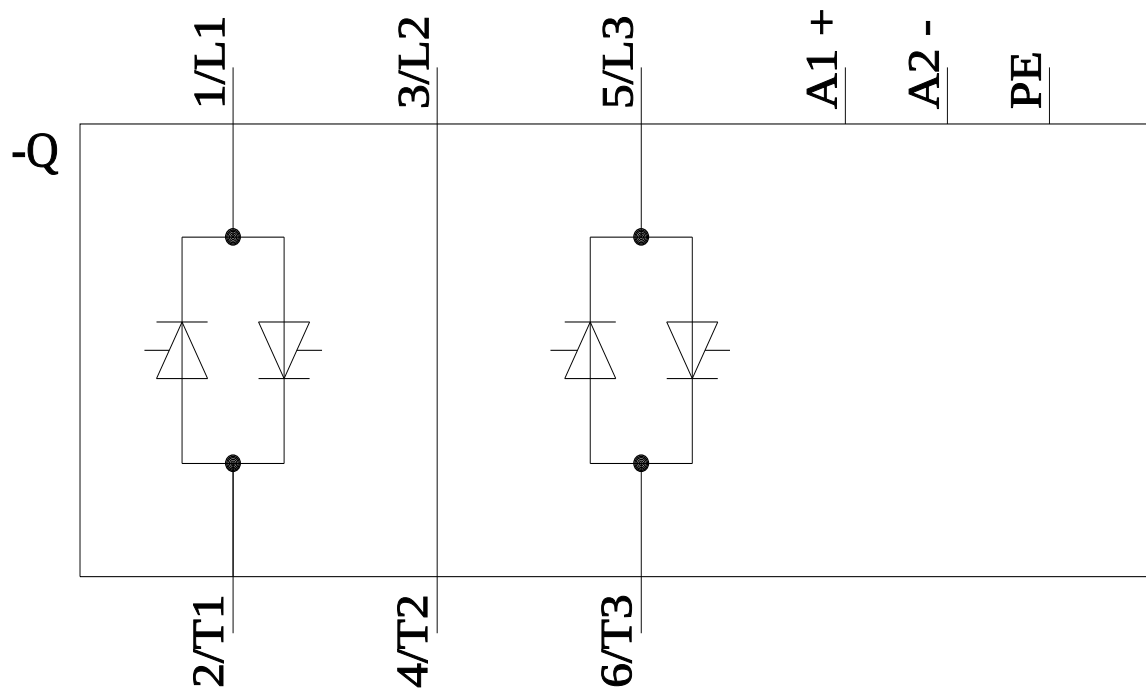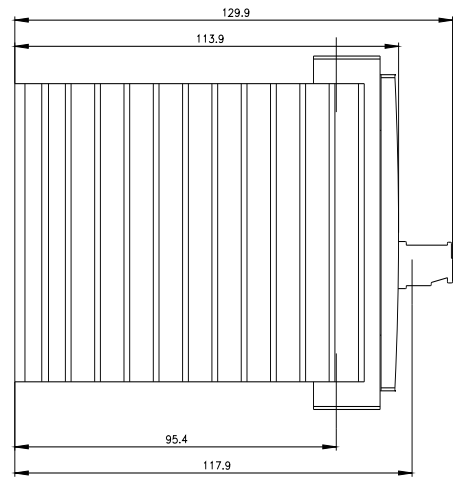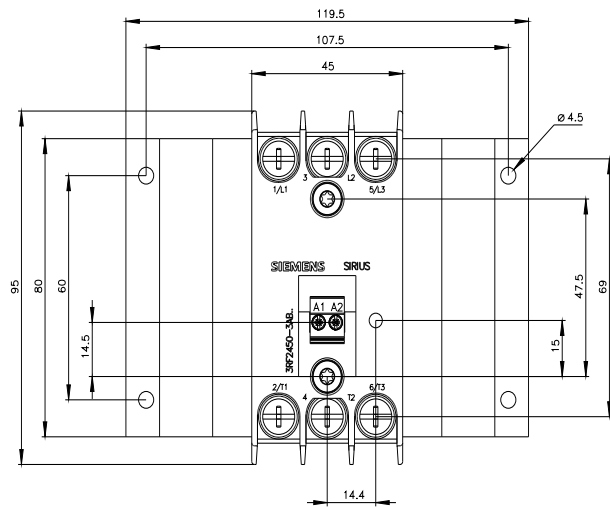

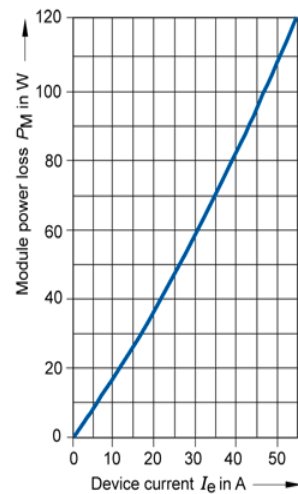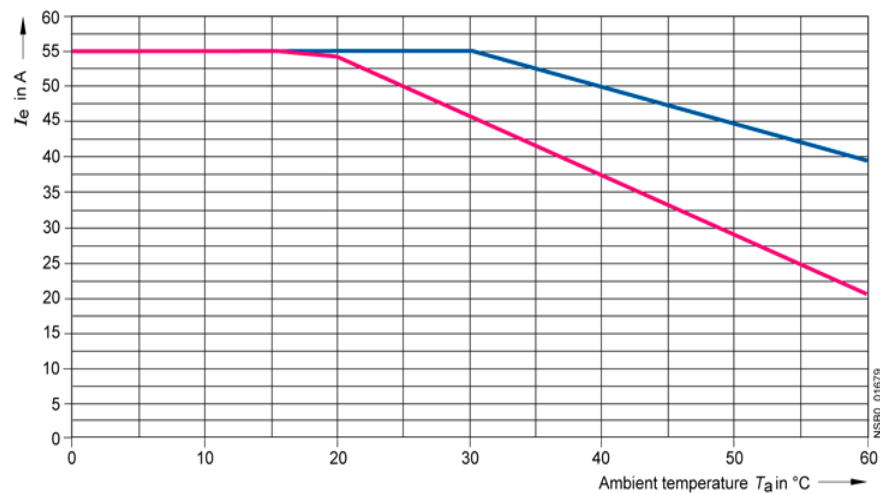

— $I_{\max}$ Thermal limit current for individual and side-by-side mounting
— I_{IEC} Current according to IEC 947-4-3 for individual and side-by-side mounting

last modified:

6/3/2021