



Contactor relay, 3 NO + 1 NC, 12 V DC, Size S00, screw terminal

|                          |                     |
|--------------------------|---------------------|
| product brand name       | SIRIUS              |
| product designation      | Auxiliary contactor |
| product type designation | 3RH2                |

### General technical data

|                                                                                       |                        |
|---------------------------------------------------------------------------------------|------------------------|
| size of contactor                                                                     | S00                    |
| product extension auxiliary switch                                                    | Yes                    |
| insulation voltage with degree of pollution 3 at AC rated value                       | 690 V                  |
| degree of pollution                                                                   | 3                      |
| surge voltage resistance rated value                                                  | 6 kV                   |
| shock resistance at rectangular impulse                                               |                        |
| • at DC                                                                               | 10g / 5 ms, 5g / 10 ms |
| shock resistance with sine pulse                                                      |                        |
| • at DC                                                                               | 15g / 5 ms, 8g / 10 ms |
| mechanical service life (switching cycles)                                            |                        |
| • of contactor typical                                                                | 30 000 000             |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000              |
| • of the contactor with added auxiliary switch block typical                          | 10 000 000             |
| reference code according to IEC 81346-2                                               | K                      |
| Substance Prohibitance (Date)                                                         | 10/01/2009             |

### Ambient conditions

|                                                                |                |
|----------------------------------------------------------------|----------------|
| installation altitude at height above sea level maximum        | 2 000 m        |
| ambient temperature                                            |                |
| • during operation                                             | -25 ... +60 °C |
| • during storage                                               | -55 ... +80 °C |
| relative humidity minimum                                      | 10 %           |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 %           |

### Main circuit

|                             |            |
|-----------------------------|------------|
| no-load switching frequency |            |
| • at AC                     | 10 000 1/h |
| • at DC                     | 10 000 1/h |

### Control circuit/ Control

|                                                                                |      |
|--------------------------------------------------------------------------------|------|
| type of voltage of the control supply voltage                                  | DC   |
| control supply voltage at DC                                                   |      |
| • rated value                                                                  | 12 V |
| operating range factor control supply voltage rated value of magnet coil at DC |      |
| • initial value                                                                | 0.8  |
| • full-scale value                                                             | 1.1  |

|                                           |               |
|-------------------------------------------|---------------|
| <b>closing power of magnet coil at DC</b> | 4 W           |
| <b>holding power of magnet coil at DC</b> | 4 W           |
| <b>closing delay</b>                      |               |
| • at DC                                   | 30 ... 100 ms |
| <b>opening delay</b>                      |               |
| • at DC                                   | 7 ... 13 ms   |
| <b>arcing time</b>                        | 10 ... 15 ms  |

#### Auxiliary circuit

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| <b>number of NC contacts for auxiliary contacts</b>                | 1         |
| • instantaneous contact                                            | 1         |
| <b>number of NO contacts for auxiliary contacts</b>                | 3         |
| • instantaneous contact                                            | 3         |
| <b>identification number and letter for switching elements</b>     | 31 E      |
| operational current at AC-12 maximum                               | 10 A      |
| <b>operational current at AC-15</b>                                |           |
| • at 230 V rated value                                             | 10 A      |
| • at 400 V rated value                                             | 3 A       |
| • at 500 V rated value                                             | 2 A       |
| • at 690 V rated value                                             | 1 A       |
| <b>operational current at 1 current path at DC-12</b>              |           |
| • at 24 V rated value                                              | 10 A      |
| • at 110 V rated value                                             | 3 A       |
| • at 220 V rated value                                             | 1 A       |
| • at 440 V rated value                                             | 0.3 A     |
| • at 600 V rated value                                             | 0.15 A    |
| <b>operational current with 2 current paths in series at DC-12</b> |           |
| • at 24 V rated value                                              | 10 A      |
| • at 60 V rated value                                              | 10 A      |
| • at 110 V rated value                                             | 4 A       |
| • at 220 V rated value                                             | 2 A       |
| • at 440 V rated value                                             | 1.3 A     |
| • at 600 V rated value                                             | 0.65 A    |
| <b>operational current with 3 current paths in series at DC-12</b> |           |
| • at 24 V rated value                                              | 10 A      |
| • at 60 V rated value                                              | 10 A      |
| • at 110 V rated value                                             | 10 A      |
| • at 220 V rated value                                             | 3.6 A     |
| • at 440 V rated value                                             | 2.5 A     |
| • at 600 V rated value                                             | 1.8 A     |
| <b>operating frequency at DC-12 maximum</b>                        | 1 000 1/h |
| <b>operational current at 1 current path at DC-13</b>              |           |
| • at 24 V rated value                                              | 10 A      |
| • at 110 V rated value                                             | 1 A       |
| • at 220 V rated value                                             | 0.3 A     |
| • at 440 V rated value                                             | 0.14 A    |
| • at 600 V rated value                                             | 0.1 A     |
| <b>operational current with 2 current paths in series at DC-13</b> |           |
| • at 24 V rated value                                              | 10 A      |
| • at 60 V rated value                                              | 3.5 A     |
| • at 110 V rated value                                             | 1.3 A     |
| • at 220 V rated value                                             | 0.9 A     |
| • at 440 V rated value                                             | 0.2 A     |
| • at 600 V rated value                                             | 0.1 A     |
| <b>operational current with 3 current paths in series at DC-13</b> |           |
| • at 24 V rated value                                              | 10 A      |
| • at 60 V rated value                                              | 4.7 A     |
| • at 110 V rated value                                             | 3 A       |
| • at 220 V rated value                                             | 1.2 A     |
| • at 440 V rated value                                             | 0.5 A     |
| • at 600 V rated value                                             | 0.26 A    |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>operating frequency at DC-13 maximum</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1 000 1/h                                                                                                                            |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | C characteristic: 6 A; 0.4 kA                                                                                                        |
| <b>contact reliability of auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1 faulty switching per 100 million (17 V, 1 mA)                                                                                      |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                      |
| <b>contact rating of auxiliary contacts according to UL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | A600 / Q600                                                                                                                          |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                      |
| design of the fuse link for short-circuit protection of the auxiliary switch required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | fuse gL/gG: 10 A                                                                                                                     |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                      |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | screw and snap-on mounting onto 35 mm standard mounting rail                                                                         |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 57.5 mm                                                                                                                              |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 45 mm                                                                                                                                |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 73 mm                                                                                                                                |
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 0 mm</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— at the side 6 mm</li> <li>— downwards 10 mm</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 6 mm</li> </ul> </li> </ul> |                                                                                                                                      |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                      |
| type of electrical connection for auxiliary and control circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | screw-type terminals                                                                                                                 |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), 2x 4 mm²</li> <li>— finely stranded with core end processing 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</li> </ul> </li> <li>• at AWG cables for auxiliary contacts 2x (20 ... 16), 2x (18 ... 14), 2x 12</li> </ul>                                                                                                                                                                                                      |                                                                                                                                      |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                      |
| product function positively driven operation according to IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Yes                                                                                                                                  |
| B10 value with high demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 1 000 000; With 0.3 x I <sub>e</sub>                                                                                                 |
| <b>proportion of dangerous failures</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920 40 %</li> <li>• with high demand rate according to SN 31920 73 %</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                      |
| failure rate [FIT] with low demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 100 FIT                                                                                                                              |
| T1 value for proof test interval or service life according to IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 20 y                                                                                                                                 |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | IP20                                                                                                                                 |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | finger-safe, for vertical contact from the front                                                                                     |
| <b>Certificates/ approvals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                      |
| <b>General Product Approval</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                      |



[Confirmation](#)



[KC](#)



|     |            |                           |                   |
|-----|------------|---------------------------|-------------------|
| EMC | Functional | Declaration of Conformity | Test Certificates |
|-----|------------|---------------------------|-------------------|

|                                                                                   |                                              |                                                                                   |                                                                                   |                                                    |                                          |
|-----------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------|
|                                                                                   | Safety/Safety of Machinery                   |                                                                                   |                                                                                   |                                                    |                                          |
|  | <a href="#">Type Examination Certificate</a> |  |  | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Special Test Certificate</a> |

#### Marine / Shipping



|                                                                                   |                                             |                              |                                                                                   |                                     |                                       |
|-----------------------------------------------------------------------------------|---------------------------------------------|------------------------------|-----------------------------------------------------------------------------------|-------------------------------------|---------------------------------------|
| Marine / Shipping                                                                 | other                                       |                              |                                                                                   |                                     |                                       |
|  | <a href="#">Environmental Confirmations</a> | <a href="#">Confirmation</a> |  | <a href="#">Vibration and Shock</a> | <a href="#">Transport Information</a> |

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2131-1BA40>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2131-1BA40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2131-1BA40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2131-1BA40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2131-1BA40&lang=en)


Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RH2131-1BA40/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2131-1BA40&objecttype=14&gridview=view1>

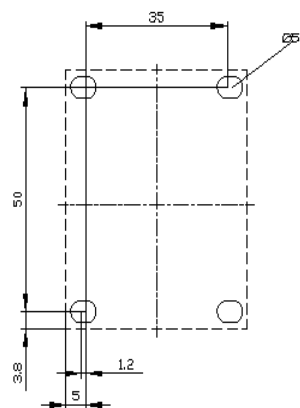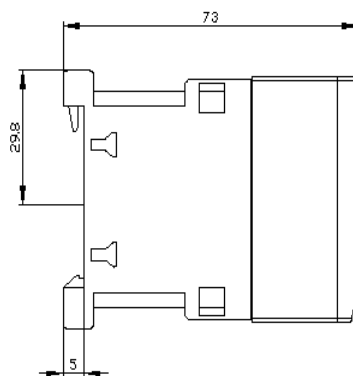

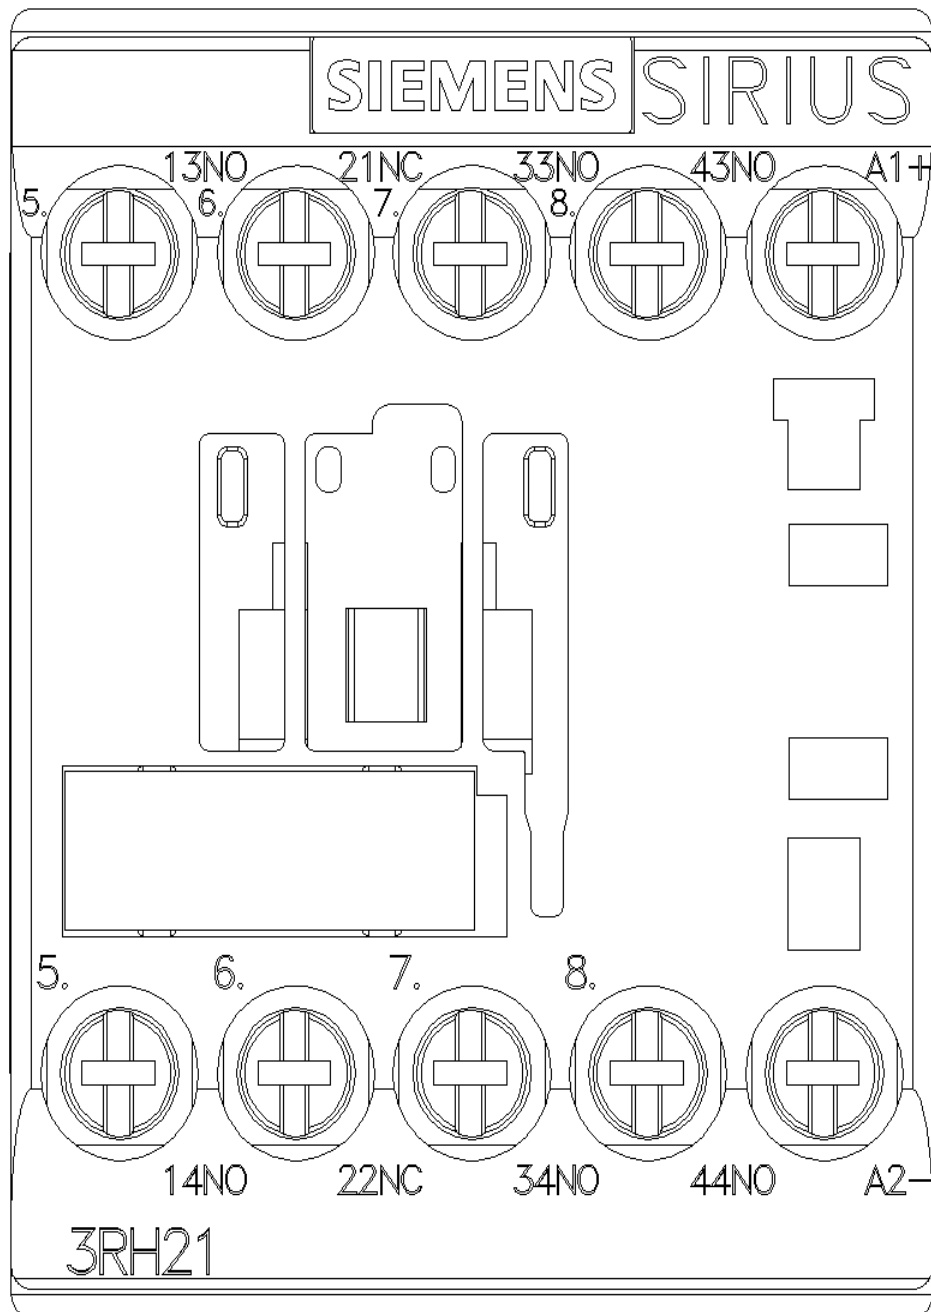

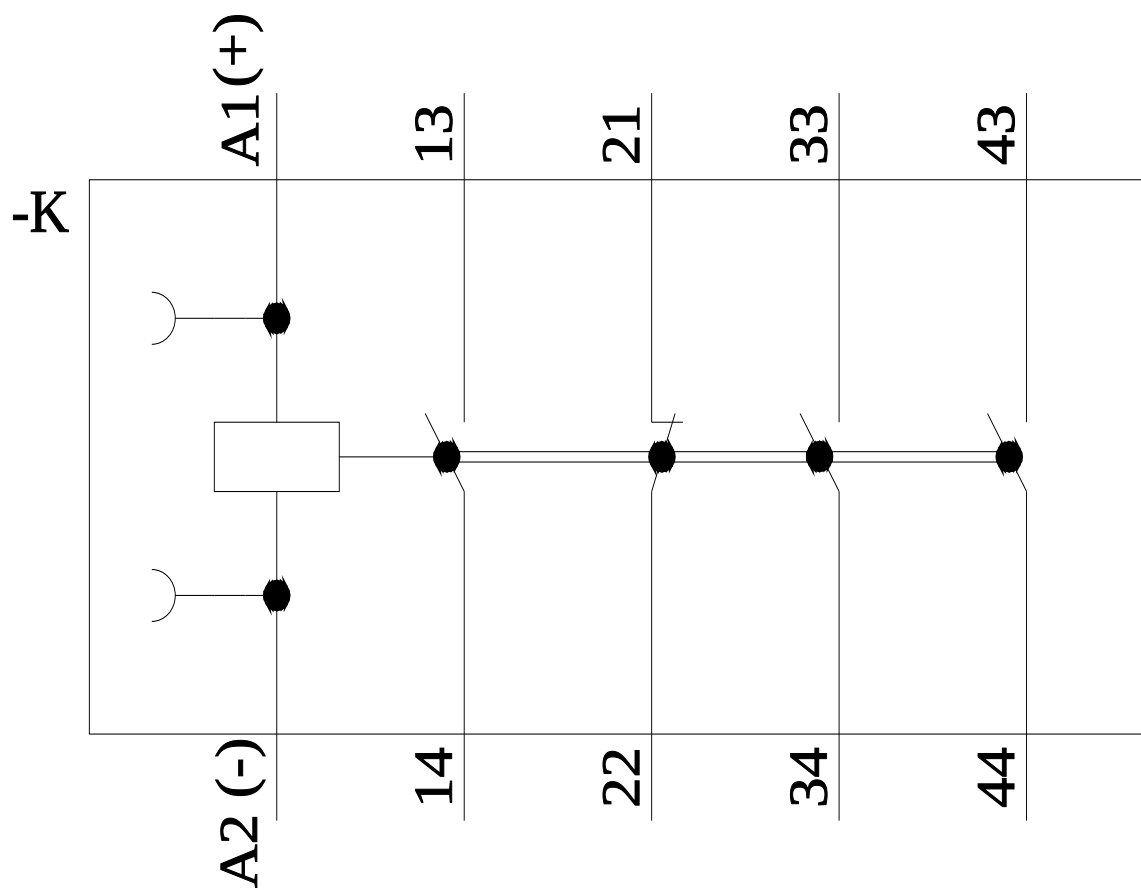

last modified:

12/1/2021 [🔗](#)