



Figure similar

DS1-X for ET 200S Standard DOL starter expandable Setting range 0.9...1.25 A AC-3, 0.37 kW / 400 V Electromechanical starter for brake control module

|                                 |                |
|---------------------------------|----------------|
| <b>product brand name</b>       | SIMATIC        |
| <b>product designation</b>      | Motor starters |
| <b>design of the product</b>    | direct starter |
| <b>product type designation</b> | ET 200S        |

### General technical data

|  |   |
|--|---|
| <b>trip class</b>  | CLASS 10  |
| <b>product function on-site operation</b>  | Yes   |
| <b>insulation voltage rated value</b>  | 500 V   |
| <b>degree of pollution</b>   | 3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131) |
| <b>surge voltage resistance rated value</b>  | 6 kV  |
| <b>maximum permissible voltage for safe isolation between main and auxiliary circuit</b> | 400 V   |
| <b>shock resistance</b>  | 5g / 11 ms  |
| <b>vibration resistance</b>  | 2g  |
| <b>operating frequency maximum</b>   | 750 1/h   |
| <b>mechanical service life (operating cycles) of the main contacts typical</b>           | 100 000   |
| <b>type of assignment</b>  | 2   |
| <b>reference code according to IEC 81346-2</b>   | Q   |
| <b>Substance Prohibitance (Date)</b>   | 10/26/2016  |
| <b>product function</b>  |   |
| • direct start   | Yes   |
| • reverse starting   | No  |
| <b>product component motor brake output</b>  | Yes   |
| <b>product feature</b>   |   |
| • brake control with 230 V AC  | No  |
| • brake control with 24 V DC   | No  |
| • brake control with 180 V DC  | No  |
| • brake control with 500 V DC  | No  |
| <b>product extension braking module for brake control</b>                                | Yes   |
| <b>product function short circuit protection</b>   | Yes   |
| <b>design of short-circuit protection</b>  | circuit-breakers  |
| <b>maximum short-circuit current breaking capacity (Icu)</b>                             |   |
| • at 400 V rated value   | 50 kA   |

### Electromagnetic compatibility

|   |   |
|---|---|
| <b>EMC emitted interference according to IEC 60947-1</b>  | CISPR11, ambience A (industrial sector)                             |
| <b>EMC immunity according to IEC 60947-1</b>              | corresponds to degree of severity 3, ambience A (industrial sector) |
| <b>conducted interference</b>                             |   |
| • due to burst according to IEC 61000-4-4                 | 2 kV on voltage supply, inputs and outputs                          |
| • due to conductor-earth surge according to IEC 61000-4-5 | 2 kV (U > 24 V DC)  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul> | 1 kV (U > 24 V DC)   |
| <b>field-based interference according to IEC 61000-4-3</b>  | 80 MHz ... 1 GHz 10 V/m, 1.4 GHz ... 2 Hz 3 V/m, 2 GHz ... 2.7 GHz 1 V/m |
| <b>Safety related data</b>  |  |
| B10 value with high demand rate according to SN 31920   | 1 000 000  |
| <b>proportion of dangerous failures</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> </ul>                  | 50 %   |
| <ul style="list-style-type: none"> <li>• with high demand rate according to SN 31920</li> </ul>                 | 75 %   |
| <b>failure rate [FIT]</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> </ul>                  | 100 FIT  |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>touch protection on the front according to IEC 60529</b>   | finger-safe  |
| <b>Main circuit</b>   |  |
| <b>number of poles for main current circuit</b>   | 3  |
| <b>design of the switching contact</b>  | electromechanical  |
| <b>adjustable current response value current of the current-dependent overload release</b>                      | 0.9 ... 1.25 A   |
| <b>type of the motor protection</b>   | bimetal  |
| operating voltage rated value   | 200 ... 400 V  |
| <b>operating frequency 1 rated value</b>  | 50 Hz  |
| <b>operating frequency 2 rated value</b>  | 60 Hz  |
| <b>relative positive tolerance of the operating frequency</b>   | 10 %   |
| <b>relative negative tolerance of the operating frequency</b>   | 10 %   |
| operating range relative to the operating voltage at AC at 50 Hz  | 200 ... 440 V  |
| <b>operational current</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> </ul>                                | 1.25 A   |
| operating power at AC-3 at 400 V rated value  | 0.37 kW  |
| operating power for 3-phase motors at 400 V at 50 Hz  | 0.37 ... 0.37 kW   |
| <b>Inputs/ Outputs</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• digital inputs parameterizable</li> </ul>                              | No   |
| <ul style="list-style-type: none"> <li>• digital outputs parameterizable</li> </ul>                             | No   |
| <b>number of digital inputs</b>   | 0  |
| <b>number of sockets</b>  |  |
| <ul style="list-style-type: none"> <li>• for digital output signals</li> </ul>                                  | 0  |
| <ul style="list-style-type: none"> <li>• for digital input signals</li> </ul>                                   | 0  |
| <b>Supply voltage</b>   |  |
| <b>type of voltage of the supply voltage</b>  | DC   |
| <b>supply voltage 1 at DC</b>   | 24 ... 24 V  |
| <b>supply voltage 1 at DC rated value</b>   |  |
| <ul style="list-style-type: none"> <li>• minimum permissible</li> </ul>   | 20.4 V   |
| <ul style="list-style-type: none"> <li>• maximum permissible</li> </ul>   | 28.8 V   |
| <b>Control circuit/ Control</b>   |  |
| <b>type of voltage of the control supply voltage</b>  | DC   |
| control supply voltage at DC rated value  | 20.4 ... 28.8 V  |
| <b>control supply voltage 1</b>   |  |
| <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>   | 20.4 ... 28.8 V  |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>   | 24 ... 24 V  |
| <b>power loss [W] in auxiliary and control circuit</b>  |  |
| <ul style="list-style-type: none"> <li>• in switching state OFF</li> </ul>                                      |  |
| <ul style="list-style-type: none"> <li>— with bypass circuit</li> </ul>   | 0.3744 W   |
| <ul style="list-style-type: none"> <li>— without bypass circuit</li> </ul>                                      | 0.374 W  |
| <ul style="list-style-type: none"> <li>• in switching state ON</li> </ul>                                       |  |
| <ul style="list-style-type: none"> <li>— with bypass circuit</li> </ul>   | 4.1184 W   |
| <ul style="list-style-type: none"> <li>— without bypass circuit</li> </ul>                                      | 4.118 W  |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | vertical, horizontal   |
| <b>fastening method</b>   | pluggable on terminal module   |
| <b>height</b>   | 265 mm   |
| <b>width</b>  | 45 mm  |

|  |                      |
|--|----------------------|
| depth  | 120 mm               |
| <b>Ambient conditions</b>  |                      |
| installation altitude at height above sea level maximum              | 2 000 m              |
| <b>ambient temperature</b>   |                      |
| • during operation   | 0 ... 60 °C          |
| • during storage   | -40 ... +70 °C       |
| • during transport   | -40 ... +70 °C       |
| relative humidity during operation                                   | 5 ... 95 %           |
| <b>Communication/ Protocol</b>                                       |                      |
| <b>protocol is supported</b>   |                      |
| • PROFIBUS DP protocol   | Yes                  |
| • PROFINET protocol  | Yes                  |
| design of the interface PROFINET protocol                            | Yes                  |
| <b>product function bus communication</b>                            | Yes                  |
| protocol is supported AS-Interface protocol                          | No                   |
| <b>product function</b>  |                      |
| • supports PROFenergy measured values                                | No                   |
| • supports PROFenergy shutdown                                       | No                   |
| <b>address space memory of address range</b>                         |                      |
| • of the inputs  | 1 byte               |
| • of the outputs   | 1 byte               |
| <b>type of electrical connection</b>                                 |                      |
| • of the communication interface                                     | via backplane bus    |
| • for communication transmission                                     | via backplane bus    |
| <b>Connections/ Terminals</b>  |                      |
| type of electrical connection for main current circuit               | screw-type terminals |
| <b>type of electrical connection</b>                                 |                      |
| • 1 for digital input signals  | using control module |
| • 2 for digital input signals  | using control module |
| <b>type of electrical connection</b>                                 |                      |
| • at the manufacturer-specific device interface                      | plug                 |
| • for main energy infeed   | screw-type terminals |
| • for load-side outgoing feeder                                      | Screw-type terminals |
| • for main energy transmission                                       | via energy bus       |
| • for supply voltage line-side                                       | via backplane bus    |
| • for supply voltage transmission                                    | via backplane bus    |
| <b>UL/CSA ratings</b>  |                      |
| operating voltage at AC at 60 Hz according to CSA and UL rated value | 600 V                |
| <b>Certificates/ approvals</b>                                       |                      |
| General Product Approval   |                      |
| EMC  |                      |



[Confirmation](#)



|                                |                           |       |                |
|--------------------------------|---------------------------|-------|----------------|
| For use in hazardous locations | Declaration of Conformity | other | Dangerous Good |
|--------------------------------|---------------------------|-------|----------------|



[Confirmation](#)

[Transport Information](#)

#### Further information


Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1301-0KB00-0AA2>

Cax online generator

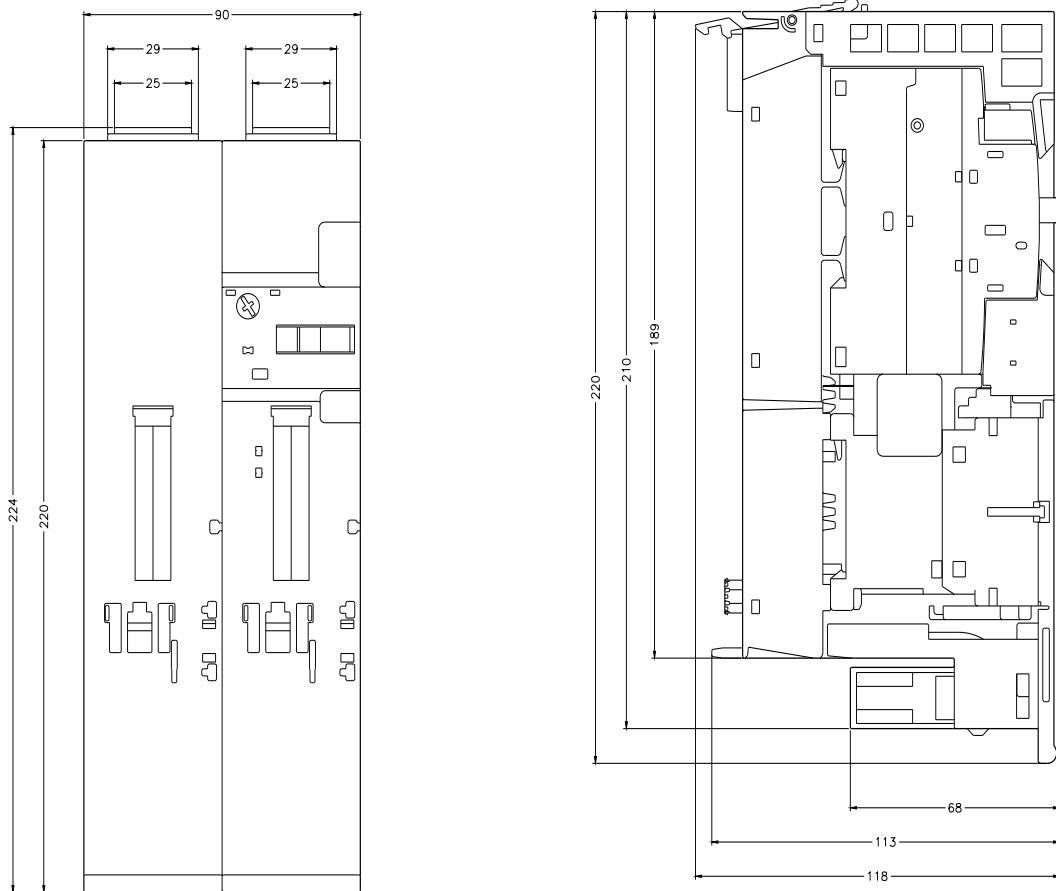

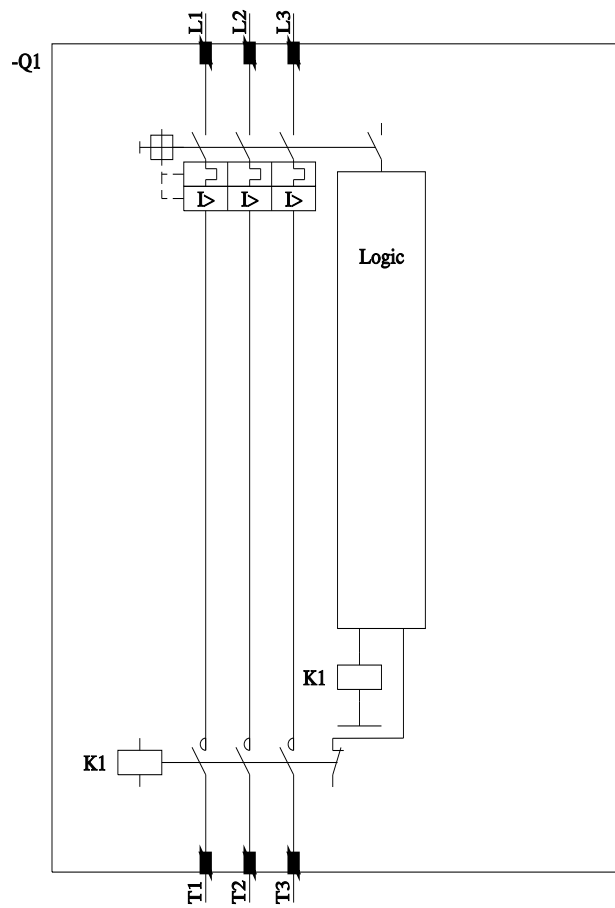

last modified:

12/15/2020 [↗](#)