



DS1-X for ET 200S Standard DOL starter expandable Setting range 1.1...1.6 A AC-3, 0.55 kW / 400 V Electromechanical starter for brake control module

| | |
|---------------------------------|----------------|
| product brand name | SIMATIC |
| product designation | Motor starters |
| design of the product | direct starter |
| product type designation | ET 200S |

General technical data

| | |
|---|---|
| trip class | CLASS 10 |
| product function on-site operation | Yes |
| insulation voltage rated value | 500 V |
| degree of pollution | 3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131) |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation between main and auxiliary circuit | 400 V |
| shock resistance | 5g / 11 ms |
| vibration resistance | 2g |
| operating frequency maximum | 750 1/h |
| mechanical service life (operating cycles) of the main contacts typical | 100 000 |
| type of assignment | 2 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 10/26/2016 |
| product function | |
| • direct start | Yes |
| • reverse starting | No |
| product component motor brake output | Yes |
| product feature | |
| • brake control with 230 V AC | No |
| • brake control with 24 V DC | No |
| • brake control with 180 V DC | No |
| • brake control with 500 V DC | No |
| product extension braking module for brake control | Yes |
| product function short circuit protection | Yes |
| design of short-circuit protection | circuit-breakers |
| maximum short-circuit current breaking capacity (Icu) | |
| • at 400 V rated value | 50 kA |

Electromagnetic compatibility

| | |
|---|---|
| EMC emitted interference according to IEC 60947-1 | CISPR11, ambience A (industrial sector) |
| EMC immunity according to IEC 60947-1 | corresponds to degree of severity 3, ambience A (industrial sector) |
| conducted interference | |
| • due to burst according to IEC 61000-4-4 | 2 kV on voltage supply, inputs and outputs |
| • due to conductor-earth surge according to IEC 61000-4-5 | 2 kV (U > 24 V DC) |
| • due to conductor-conductor surge according to IEC | 1 kV (U > 24 V DC) |

Safety related data

| | |
|--|-------------|
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| proportion of dangerous failures | |
| • with low demand rate according to SN 31920 | 50 % |
| • with high demand rate according to SN 31920 | 75 % |
| failure rate [FIT] | |
| • with low demand rate according to SN 31920 | 100 FIT |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe |

Main circuit

| | |
|--|-------------------|
| number of poles for main current circuit | 3 |
| design of the switching contact | electromechanical |
| adjustable current response value current of the current-dependent overload release | 1.1 ... 1.6 A |
| type of the motor protection | bimetal |
| operating voltage rated value | 200 ... 400 V |
| operating frequency 1 rated value | 50 Hz |
| operating frequency 2 rated value | 60 Hz |
| relative positive tolerance of the operating frequency | 10 % |
| relative negative tolerance of the operating frequency | 10 % |
| operating range relative to the operating voltage at AC at 50 Hz | 200 ... 440 V |
| operational current | |
| • at AC-3 at 400 V rated value | 1.6 A |
| operating power at AC-3 at 400 V rated value | 0.55 kW |
| operating power for 3-phase motors at 400 V at 50 Hz | 0.55 ... 0.55 kW |

Inputs/ Outputs

| | |
|-----------------------------------|----|
| product function | |
| • digital inputs parameterizable | No |
| • digital outputs parameterizable | No |
| number of digital inputs | 0 |
| number of sockets | |
| • for digital output signals | 0 |
| • for digital input signals | 0 |

Supply voltage

| | |
|--|-------------|
| type of voltage of the supply voltage | DC |
| supply voltage 1 at DC | 24 ... 24 V |
| supply voltage 1 at DC rated value | |
| • minimum permissible | 20.4 V |
| • maximum permissible | 28.8 V |

Control circuit/ Control

| | |
|--|-----------------|
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC rated value | 20.4 ... 28.8 V |
| control supply voltage 1 | |
| • at DC rated value | 20.4 ... 28.8 V |
| • at DC | 24 ... 24 V |
| power loss [W] in auxiliary and control circuit | |
| • in switching state OFF | |
| — with bypass circuit | 0.3744 W |
| — without bypass circuit | 0.374 W |
| • in switching state ON | |
| — with bypass circuit | 4.1184 W |
| — without bypass circuit | 4.118 W |

Installation/ mounting/ dimensions

| | |
|--------------------------|------------------------------|
| mounting position | vertical, horizontal |
| fastening method | pluggable on terminal module |
| height | 265 mm |
| width | 45 mm |
| depth | 120 mm |

| Ambient conditions | |
|---|----------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | 0 ... 60 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity during operation | 5 ... 95 % |

| Communication/ Protocol | |
|--|-------------------|
| protocol is supported | |
| • PROFIBUS DP protocol | Yes |
| • PROFINET protocol | Yes |
| design of the interface PROFINET protocol | Yes |
| product function bus communication | Yes |
| protocol is supported AS-Interface protocol | No |
| product function | |
| • supports PROFenergy measured values | No |
| • supports PROFenergy shutdown | No |
| address space memory of address range | |
| • of the inputs | 1 byte |
| • of the outputs | 1 byte |
| type of electrical connection | |
| • of the communication interface | via backplane bus |
| • for communication transmission | via backplane bus |

| Connections/ Terminals | |
|--|----------------------|
| type of electrical connection for main current circuit | screw-type terminals |
| type of electrical connection | |
| • 1 for digital input signals | using control module |
| • 2 for digital input signals | using control module |
| type of electrical connection | |
| • at the manufacturer-specific device interface | plug |
| • for main energy infeed | screw-type terminals |
| • for load-side outgoing feeder | Screw-type terminals |
| • for main energy transmission | via energy bus |
| • for supply voltage line-side | via backplane bus |
| • for supply voltage transmission | via backplane bus |

| UL/CSA ratings | |
|--|-------|
| operating voltage at AC at 60 Hz according to CSA and UL rated value | 600 V |

| Certificates/ approvals | |
|--------------------------|-----|
| General Product Approval | EMC |



[Confirmation](#)



| | | | |
|--------------------------------|---------------------------|-------|----------------|
| For use in hazardous locations | Declaration of Conformity | other | Dangerous Good |
|--------------------------------|---------------------------|-------|----------------|



[Confirmation](#)

[Transport Information](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1301-1AB00-0AA2>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1301-1AB00-0AA2>

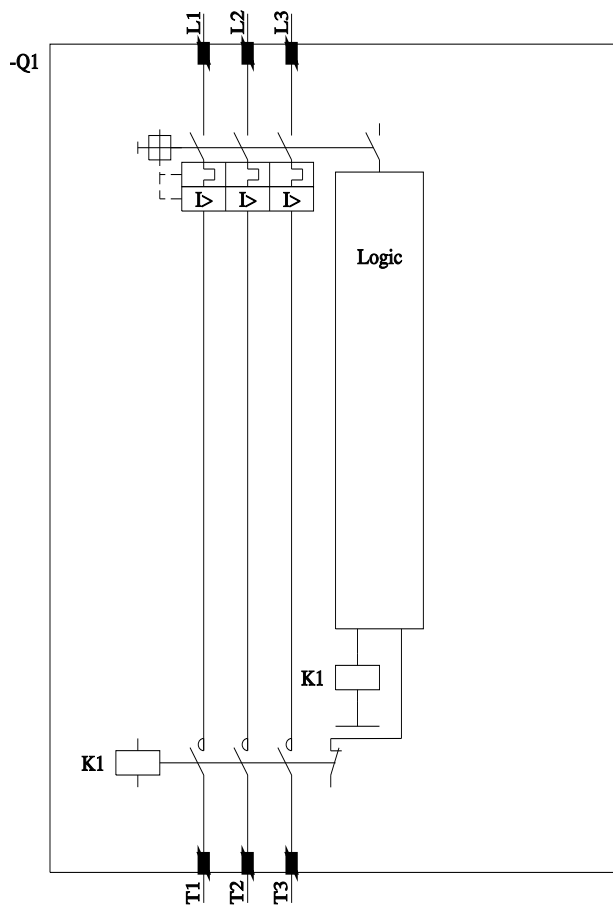

last modified:

12/15/2020