



SIRIUS motor starter M200D AS-i Communication: AS-Interface Reversing starter standard Mechanical switching AC-3, 0.75KW / 400 V 0.15 A...2.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC without brake contact 4 DI / 1 DO AS-i Han Q4/2 - Han Q8/0 with manual on-site operation and key-operated switch

**product brand name**  
**product designation**  
**design of the product**  
**product type designation**  
**trip class**  
**product function**

- on-site operation
- control circuit interface to parallel wiring

**insulation voltage rated value**  
**degree of pollution**  
**surge voltage resistance rated value**  
**maximum permissible voltage for safe isolation**

- between main and auxiliary circuit
- between control and auxiliary circuit

**protection class IP**  
**shock resistance**  
**vibration resistance**  
mechanical service life (operating cycles) of the main contacts typical  
**type of assignment**  
**certificate of suitability**  
**Substance Prohibitance (Date)**  
**product function**

- direct start
- reverse starting

**product component motor brake output**  
**product feature**

- brake control with 230 V AC
- brake control with 400 V AC
- brake control with 24 V DC
- brake control with 180 V DC
- brake control with 500 V DC

**product extension braking module for brake control**  
**product function short circuit protection**  
**design of short-circuit protection**  
**maximum short-circuit current breaking capacity (Icu)**

- at 400 V rated value
- at 500 V rated value

EMC emitted interference according to IEC 60947-1  
EMC immunity according to IEC 60947-1  
**conducted interference**

- due to burst according to IEC 61000-4-4

SIRIUS  
Motor starters  
reversing starter  
M200D  
CLASS 5, 10, 15, 20  
  
Yes  
No  
500 V  
3  
6 000 V  
  
400 V  
24 V  
IP65  
12g / 11 ms  
7 mm / 2g  
10 000 000  
  
2  
CE  
07/01/2006  
  
No  
Yes  
No  
  
No  
No  
No  
No  
No  
No  
No  
Yes  
circuit-breakers  
  
50 000 A  
50 000 A  
CISPR11, ambience A (industrial sector)  
corresponds to degree of severity 3, ambience A (industrial sector)  
  
2 kV network connection / 1 kV control connection

<ul style="list-style-type: none"> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	2 kV
touch protection against electrical shock	finger-safe
<b>Main circuit</b>	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	0.15 ... 2 A
type of the motor protection	full motor protection
operating voltage rated value	200 ... 440 V
operational current	
<ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> <li>• at AC-3 at 400 V rated value</li> </ul>	2 A 2 A
operating power	
<ul style="list-style-type: none"> <li>• at AC-3</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> </ul>	0.75 kW 750 W
product function	
<ul style="list-style-type: none"> <li>• digital inputs parameterizable</li> <li>• digital outputs parameterizable</li> </ul>	Yes Yes
number of digital inputs	4
number of sockets	
<ul style="list-style-type: none"> <li>• for digital output signals</li> <li>• for digital input signals</li> </ul>	1 4
number of digital outputs	1
<b>Supply voltage</b>	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 V
supply voltage 1 at DC rated value	30 V
<ul style="list-style-type: none"> <li>• minimum permissible</li> <li>• maximum permissible</li> </ul>	26.5 V 31.6 V
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
control supply voltage 1	
<ul style="list-style-type: none"> <li>• at DC rated value</li> <li>• at DC rated value</li> <li>• at DC</li> </ul>	24 V 20.4 ... 28.8 V 20.4 ... 28.8 V
control current at DC	
<ul style="list-style-type: none"> <li>• in standby mode of operation</li> <li>• during operation</li> </ul>	100 mA 600 mA
power loss [W] in auxiliary and control circuit	
<ul style="list-style-type: none"> <li>• in switching state OFF with bypass circuit</li> <li>• in switching state ON with bypass circuit</li> </ul>	2.0736 W 4.1184 W
<b>Response times</b>	
ON-delay time	85 ms
OFF-delay time	65 ms
mounting position	vertical, horizontal, flat
<ul style="list-style-type: none"> <li>• recommended</li> </ul>	horizontal
fastening method	screw fixing
height	215 mm
width	294 mm
depth	159 mm
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +55 °C -40 ... +70 °C -40 ... +70 °C
relative humidity during operation	10 ... 95 %
protocol is supported	

<ul style="list-style-type: none"> <li>• PROFIBUS DP protocol</li> <li>• PROFINET protocol</li> </ul>	No
<b>design of the interface</b>	No
<ul style="list-style-type: none"> <li>• AS-Interface protocol</li> <li>• PROFINET protocol</li> <li>• PROFIBUS DP protocol</li> </ul>	Yes
<b>product function bus communication</b>	No
protocol is supported AS-Interface protocol	No
product function control circuit interface with IO link	Yes
type of electrical connection of the communication interface	No
<b>type of electrical connection</b>	M12 plug
<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>	plug according to ISO 23570, HAN Q4/2 connector
<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• 1 for digital input signals</li> <li>• 1 for digital output signals</li> <li>• 2 for digital input signals</li> <li>• 3 for digital input signals</li> <li>• 4 for digital input signals</li> </ul>	M12 socket
	M12 socket
	M12 socket
	M12 socket
	M12 socket
<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• at the manufacturer-specific device interface</li> <li>• for device addressing</li> <li>• for supply voltage line-side</li> </ul>	optical interface
full-load current (FLA) for 3-phase AC motor at 480 V rated value	M12 plug
	M12 plug
	1.6 A
<b>yielded mechanical performance [hp]</b>	
<ul style="list-style-type: none"> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>	0.7 hp
	1 hp
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V

#### Certificates/ approvals

General Product Approval	EMC
--------------------------	-----



[Confirmation](#)



Declaration of Conformity	Test Certificates	other	Dangerous Good
---------------------------	-------------------	-------	----------------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Transport Information](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1325-6KS41-3AA0>

##### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1325-6KS41-3AA0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1325-6KS41-3AA0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1325-6KS41-3AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1325-6KS41-3AA0&lang=en)

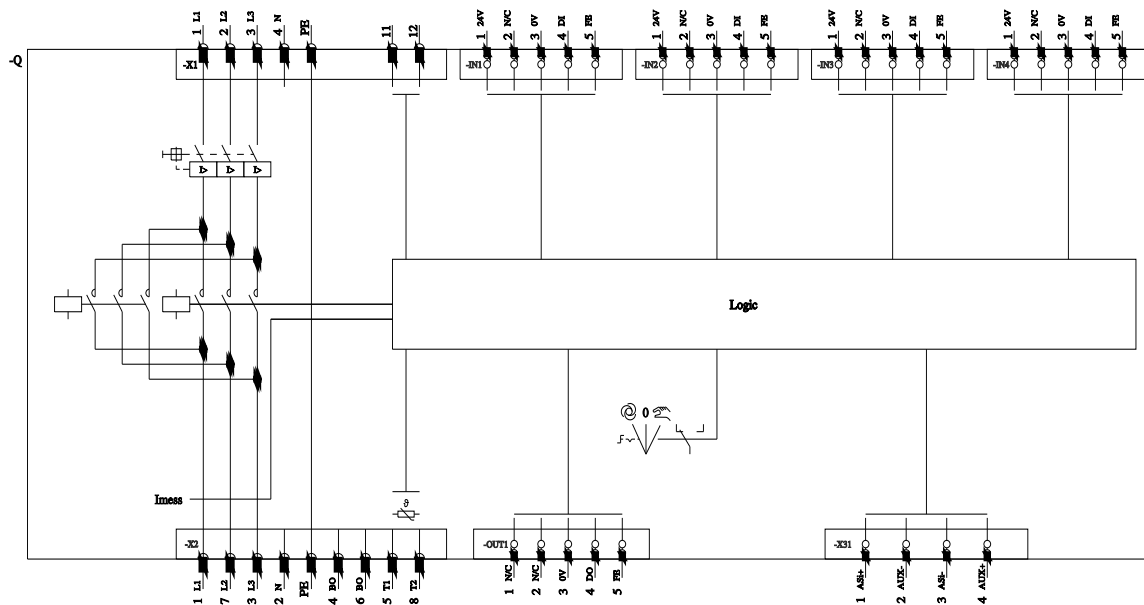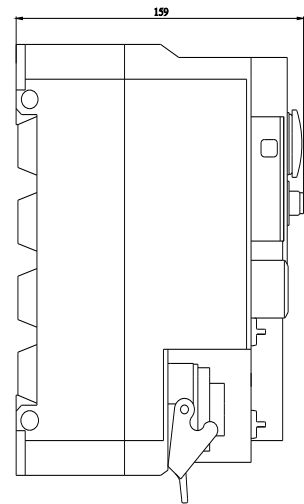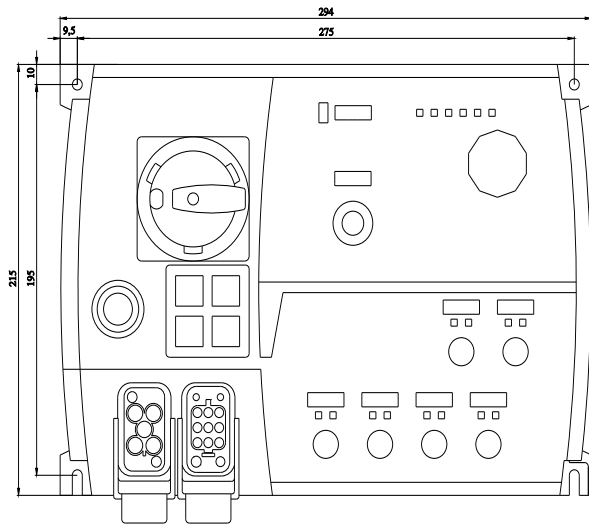

last modified:

12/21/2021

