

AS-Interface 4-fold M12 feeder U_{ASI} and U_{aux}, 4 x M12 socket IP67 Delivery incl. mounting plate



General technical data			
Type of device design of the product Function operating voltage according to AS-Interface spezifikation Number sockets Scope of supply	V	AS-Interface accessories AS-i M12 4-fold feeder, AS-i with Uaux, 4x M12 socket AS-i flat cable transition to M12 26.5 ... 31.6 4 Delivery including mounting plate	
Connections/ Terminals			
type of electrical connection AS interface Connection			insulation piercing method for AS-Interface flat cable 4 × M12 socket
Inputs			
Inputs socket assignment			1 = AS-i "+" 2 = Uaux "-" 3=AS-i "-" 4 = Uaux "+"
Mechanical data			
Type of mounting Contacts Load rating max	A	for wall and standard rail mounting 4	
Ambient conditions			
ambient temperature	°C	-25 ... +85	
ambient temperature during storage	°C	-25 ... +85	
degree of protection		IP67	
Certificates/ approvals			
General Product Approval		EMC	
		Declaration of Conformity	



[Confirmation](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1NR04>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NR04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NR04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-1NR04&lang=en

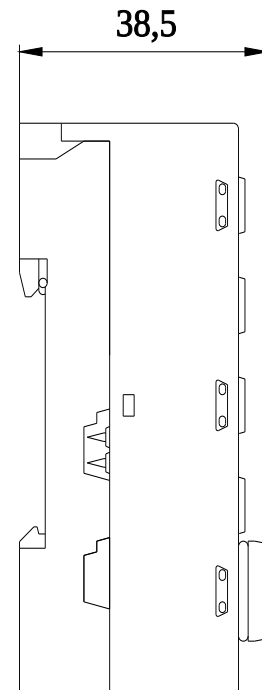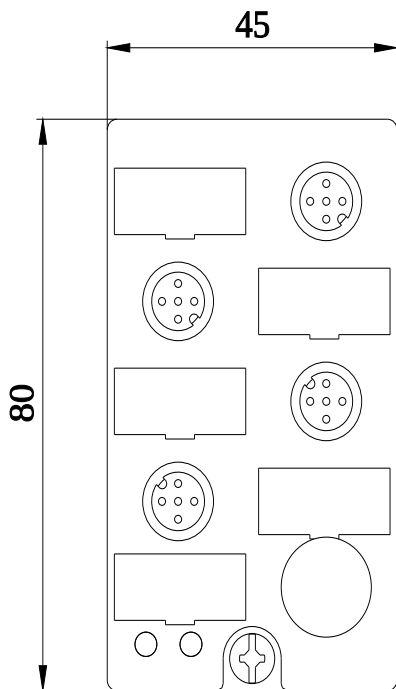

last modified:

12/21/2020 