



AS-Interface M12 branch U_ASI without Uaux, 1 m cable with M12 cable socket angled IP67/68/69K, max. 4 A

General technical data			
Type of device design of the product Function operating voltage according to AS-Interface spezifikation Note	V	AS-Interface accessories AS-i M12 feeder, AS-i without Uaux, 1 m cable AS-i flat cable transition to M12 26.5 ... 31.6 cable must not end in the feeder	
Connections/ Terminals			
type of electrical connection AS interface • Connection		insulation piercing method for AS-Interface flat cable M12 cable box 1 m	
Inputs			
Inputs socket assignment		1 = AS-i "+" 3=AS-i "-"	
Mechanical data			
Type of mounting Contacts Load rating max	A	screw fixing 4	
Ambient conditions			
ambient temperature ambient temperature during storage degree of protection	°C °C	-25 ... +75 -25 ... +85 IP67/68/69K	
Certificates/ approvals			
General Product Approval	EMC	Declaration of Conformity	Marine / Shipping

[Confirmation](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

Further information
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1NR11>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NR11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NR11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-1NR11&lang=en

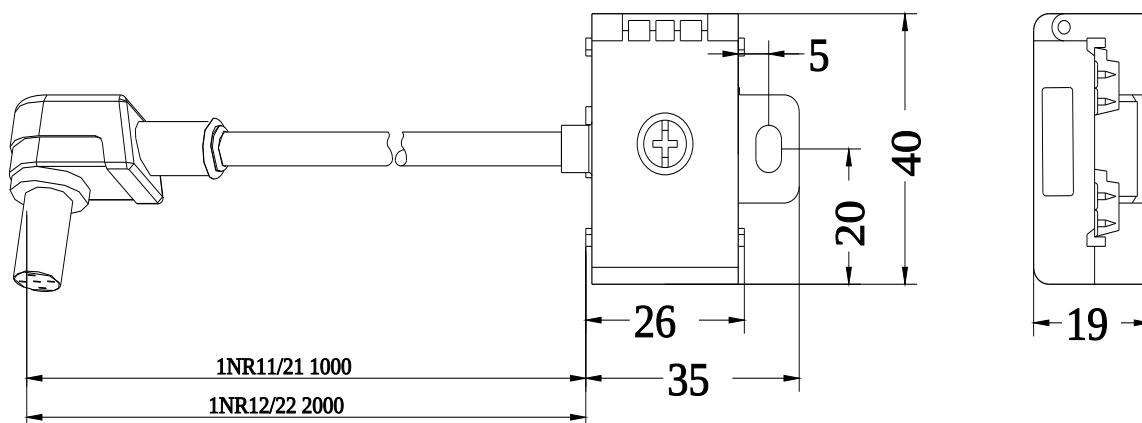

last modified:

2/25/2021