



Direct starter, 3RM1, 500 V, 0 - 0.12 kW, 0.1 - 0.5 A, 110-230 V AC, screw terminals

product brand name	SIRIUS
product category	Motor starter
product designation	Direct-on-line starter
design of the product	with electronic overload protection
product type designation	3RM1

### General technical data

trip class	CLASS 10A
equipment variant according to IEC 60947-4-2	3
product function	Direct-on-line starter
<ul style="list-style-type: none"> <li>intrinsic device protection</li> </ul>	Yes
<ul style="list-style-type: none"> <li>for power supply reverse polarity protection</li> </ul>	No
suitability for operation device connector 3ZY12	No
insulation voltage rated value	500 V
overvoltage category	III
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> <li>between main and auxiliary circuit</li> </ul>	500 V
<ul style="list-style-type: none"> <li>between control and auxiliary circuit</li> </ul>	250 V
shock resistance	6g / 11 ms
vibration resistance	1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz
operating frequency maximum	1 1/s
mechanical service life (operating cycles) typical	30 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
product function	
<ul style="list-style-type: none"> <li>direct start</li> </ul>	Yes
<ul style="list-style-type: none"> <li>reverse starting</li> </ul>	No
product function short circuit protection	No

### Electromagnetic compatibility

EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	Class A
conducted interference	
<ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> </ul>	3 kV / 5 kHz
<ul style="list-style-type: none"> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
<ul style="list-style-type: none"> <li>due to high-frequency radiation according to IEC 61000-4-6</li> </ul>	10 V
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
conducted HF interference emissions according to	Class B for domestic, business and commercial environments; Class A

**CISPR11**  
**field-bound HF interference emission according to CISPR11**

for industrial environments at 110 V DC  
 Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC

#### Safety related data

**protection class IP on the front according to IEC 60529**  
**touch protection on the front according to IEC 60529**

IP20  
 finger-safe

#### Main circuit

**number of poles for main current circuit**  
**design of the switching contact**  
**design of the switching contact as NO contact for signaling function**  
**adjustable current response value current of the current-dependent overload release**  
**minimum load [%]**  
**type of the motor protection**  
 operating voltage rated value  
**relative symmetrical tolerance of the operating voltage**  
**operating frequency 1 rated value**  
**operating frequency 2 rated value**  
**relative symmetrical tolerance of the operating frequency**  
**operational current**  
 • at AC at 400 V rated value  
 • at AC-3 at 400 V rated value  
 • at AC-53a at 400 V at ambient temperature 40 °C rated value  
**ampacity when starting maximum**  
 operating power for 3-phase motors at 400 V at 50 Hz

3  
 Hybrid  
 OUT, electronic, 24 V DC, 15 mA  
 0.1 ... 0.5 A  
 20 %; from set rated current  
 solid-state  
 48 ... 500 V  
 10 %  
 50 Hz  
 60 Hz  
 10 %  
 0.5 A  
 0.5 A  
 0.5 A  
 4 A  
 0 ... 0.12 kW

#### Inputs/ Outputs

**input voltage at digital input**  
 • at DC rated value  
 • with signal <0> at DC  
 • for signal <1> at DC  
**input voltage at digital input**  
 • at AC rated value  
 • with signal <0> at AC  
 • for signal <1> at AC  
**input current at digital input**  
 • for signal <1> at DC  
 • with signal <0> at DC  
**input current at digital input with signal <0> at AC**  
 • at 110 V  
 • at 230 V  
**input current at digital input for signal <1> at AC**  
 • at 110 V  
 • at 230 V  
 number of CO contacts for auxiliary contacts  
**operational current of auxiliary contacts at AC-15 at 230 V maximum**  
**operational current of auxiliary contacts at DC-13 at 24 V maximum**

110 V  
 0 ... 40 V  
 79 ... 121  
 110 V  
 0 ... 40 V  
 93 ... 253 V  
 1.5 mA  
 0.25 mA  
 0.2 mA  
 0.4 mA  
 1.1 mA  
 2.3 mA  
 1  
 3 A  
 1 A

#### Control circuit/ Control

**type of voltage of the control supply voltage**  
**control supply voltage at AC**  
 • at 50 Hz rated value  
 • at 60 Hz rated value  
**relative negative tolerance of the control supply voltage at AC at 60 Hz**  
**relative positive tolerance of the control supply voltage at AC at 60 Hz**  
**control supply voltage 1 at AC**  
 • at 50 Hz  
 • at 60 Hz

AC/DC  
 110 ... 230 V  
 110 ... 230 V  
 15 %  
 10 %  
 110 ... 230 V  
 110 ... 230 V

<b>control supply voltage frequency</b>	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
<b>relative negative tolerance of the control supply voltage at DC</b>	15 %
<b>relative positive tolerance of the control supply voltage at DC</b>	10 %
<b>control supply voltage 1 at DC rated value</b>	110 V
<b>operating range factor control supply voltage rated value at DC</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• full-scale value	1.1
<b>control current at AC</b>	
• at 110 V in standby mode of operation	16 mA
• at 230 V in standby mode of operation	9 mA
• at 110 V when switching on	55 mA
• at 230 V when switching on	33 mA
• at 110 V during operation	36 mA
• at 230 V during operation	22 mA
<b>control current at DC</b>	
• in standby mode of operation	6 mA
• during operation	30 mA
<b>inrush current peak</b>	
• at AC at 110 V	1 200 mA
• at AC at 230 V	2 900 mA
• at AC at 110 V at switching on of motor	1 200 mA
• at AC at 230 V at switching on of motor	2 900 mA
<b>duration of inrush current peak</b>	
• at AC at 110 V	1 ms
• at AC at 230 V	1 ms
• at AC at 110 V at switching on of motor	1 ms
• at AC at 230 V at switching on of motor	1 ms
<b>power loss [W] in auxiliary and control circuit</b>	
• <b>in switching state OFF</b>	
— with bypass circuit	2.1 W
• <b>in switching state ON</b>	
— with bypass circuit	5.06 W

Response times

<b>ON-delay time</b>	60 ... 90 ms
<b>OFF-delay time</b>	60 ... 90 ms

Power Electronics

<b>operational current</b>	
• at 40 °C rated value	0.5 A
• at 50 °C rated value	0.5 A
• at 55 °C rated value	0.5 A
• at 60 °C rated value	0.5 A

Installation/ mounting/ dimensions

<b>mounting position</b>	vertical, horizontal, standing (observe derating)
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail
<b>height</b>	100 mm
<b>width</b>	23 mm
<b>depth</b>	142 mm
<b>required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm

<ul style="list-style-type: none"> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> </ul>	50 mm 50 mm 0 mm  0 mm 0 mm 50 mm 4 mm 50 mm
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	4 000 m; For derating see manual
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul> environmental category during operation according to IEC 60721 relative humidity during operation air pressure according to SN 31205	-25 ... +60 °C -40 ... +70 °C -40 ... +70 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 10 ... 95 % 900 ... 1 060 hPa
<b>Communication/ Protocol</b>	
<b>protocol is supported</b> <ul style="list-style-type: none"> <li>• PROFINET IO protocol</li> <li>• PROFIsafe protocol</li> </ul> <b>product function bus communication</b> protocol is supported AS-Interface protocol	No No No No
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul> <b>wire length for motor unshielded maximum</b> <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul> <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul> <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul> <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for auxiliary contacts</li> </ul> <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals 100 m  1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> ) 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 1,5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14)  0.5 ... 4 mm <sup>2</sup> 0.5 ... 4 mm <sup>2</sup>  0.5 ... 2.5 mm <sup>2</sup> 0.5 ... 2.5 mm <sup>2</sup>  1x (0,5 ... 2,5 mm <sup>2</sup> ), 2x (1,0 ... 1,5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> ) 1x (20 ... 14), 2x (18 ... 16)  20 ... 12 20 ... 14
<b>UL/CSA ratings</b>	
operating voltage at AC rated value	480 V
<b>Certificates/ approvals</b>	
<b>General Product Approval</b>	<b>EMC</b>



[Confirmation](#)



Declaration of Conformity	Test Certificates	other	Railway
---------------------------	-------------------	-------	---------



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Special Test Certificate](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1001-1AA14>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1001-1AA14>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1001-1AA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1001-1AA14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1001-1AA14&lang=en)

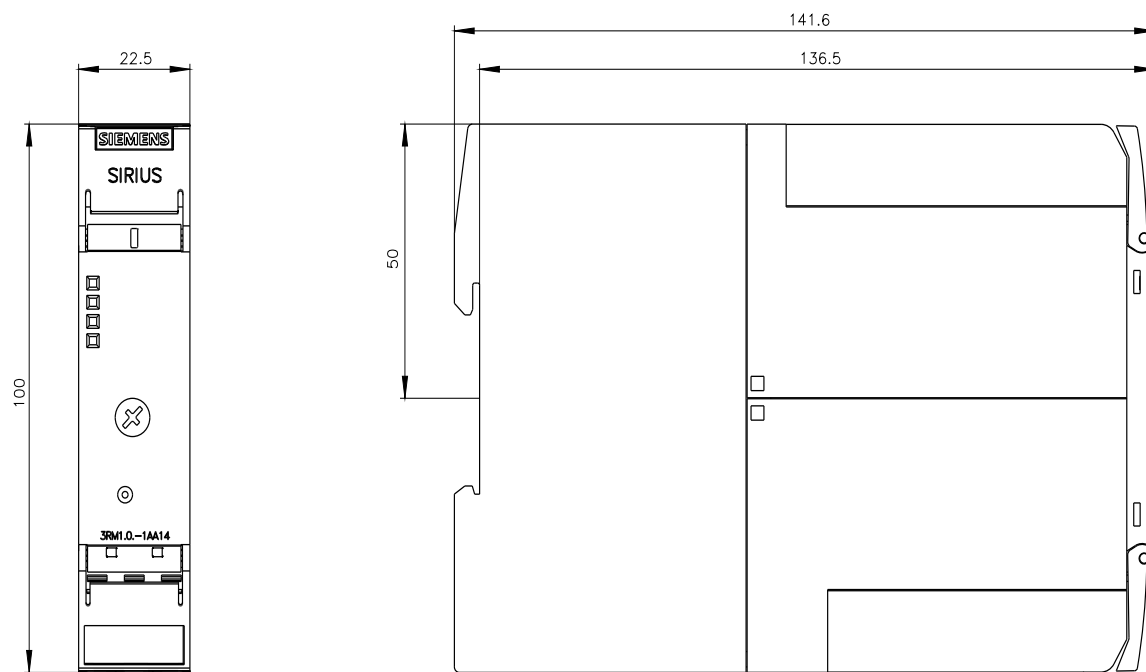

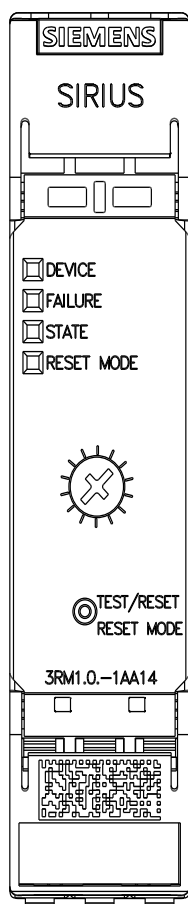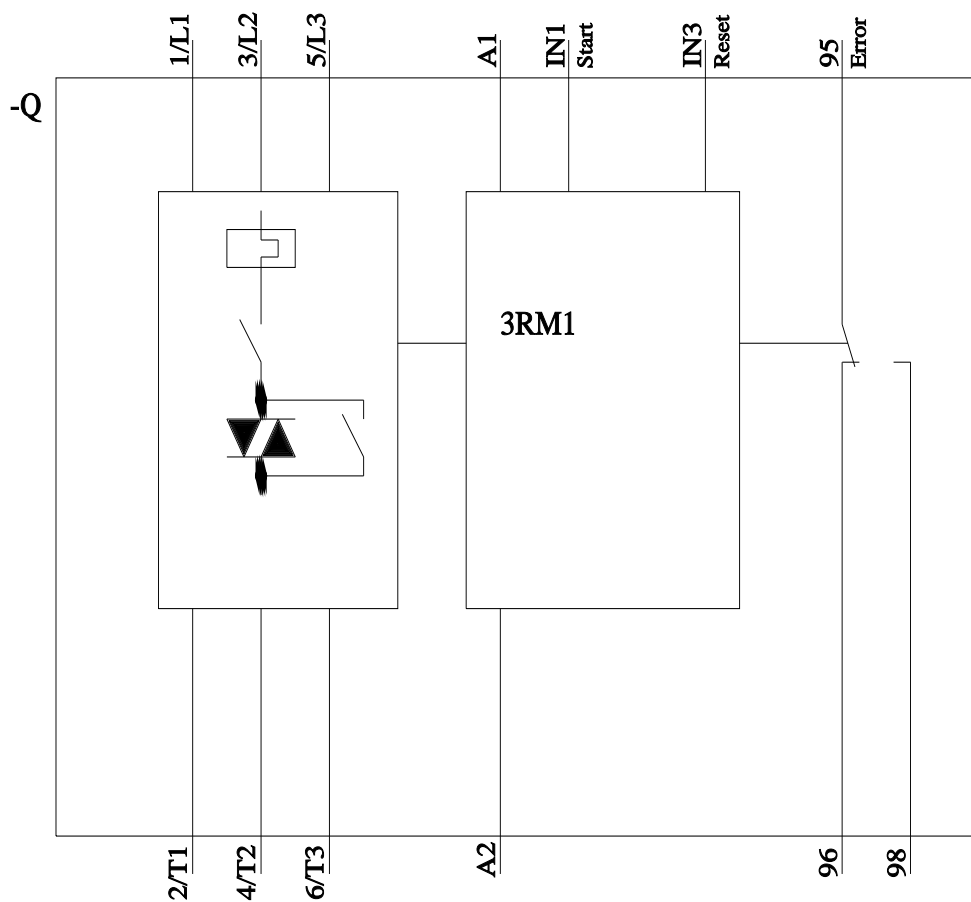

last modified:

11/21/2022