











Thermistor motor protection relay Standard evaluation unit 22.5 mm enclosure Spring-type terminal 2 change-over contacts US = 24 V AC/DC Auto-reset suitable for bimetallic switch 2 LEDs (READY/TRIPPED) galvanic isolation

| | |
|---|--|
| product brand name | SIRIUS |
| product category | SIRIUS 3RN2 thermistor motor protection |
| product designation | Thermistor motor protection relay |
| design of the product | Standard evaluation unit, suitable for bimetallic switch |
| product type designation | 3RN2 |
| General technical data | |
| display version LED | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 0.6 W |
| • at DC in hot operating state | 0.6 W |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 4 kV |
| protection class IP | IP20 |
| shock resistance acc. to IEC 60068-2-27 | 11g / 15 ms |
| vibration resistance acc. to IEC 60068-2-6 | 10 ... 55 Hz: 0.35 mm |
| mechanical service life (switching cycles) typical | 10 000 000 |
| electrical endurance (switching cycles) at AC-15 at 230 V typical | 100 000 |
| thermal current of the switching element with contacts maximum | 5 A |
| reference code acc. to IEC 81346-2 | K |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 24 ... 24 V |
| • at 60 Hz rated value | 24 ... 24 V |
| control supply voltage at DC | |
| • rated value | 24 ... 24 V |
| operating range factor control supply voltage rated value at DC | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated | |

| | |
|---|---|
| value at AC at 60 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| inrush current peak | |
| • at 24 V | 1.8 A |
| duration of inrush current peak | |
| • at 24 V | 2 ms |
| Measuring circuit | |
| buffering time in the event of power failure minimum | 40 ms |
| Precision | |
| relative metering precision | 9 % |
| Auxiliary circuit | |
| material of switching contacts | AgSnO ₂ |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| number of CO contacts for auxiliary contacts | 2 |
| Main circuit | |
| operating frequency rated value | 50 ... 60 Hz |
| Outputs | |
| ampacity of the output relay at AC-15 at 250 V at 50/60 Hz | 3 A |
| ampacity of the output relay at DC-13 | |
| • at 24 V | 1 A |
| • at 125 V | 0.2 A |
| continuous current of the DIAZED fuse link of the output relay | 6 A |
| Electromagnetic compatibility | |
| conducted interference | |
| • due to burst acc. to IEC 61000-4-4 | 2 kV (power ports) / 1 kV (signal ports) |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 2 kV (line to ground) |
| • due to conductor-conductor surge acc. to IEC 61000-4-5 | 1 kV (line to line) |
| electrostatic discharge acc. to IEC 61000-4-2 | 6 kV contact discharge / 8 kV air discharge |
| Galvanic isolation | |
| design of the electrical isolation | galvanic isolation |
| galvanic isolation | |
| • between input and output | Yes |
| • between the outputs | Yes |
| • between the voltage supply and other circuits | No |
| Connections/ Terminals | |
| product function removable terminal for auxiliary and control circuit | Yes |
| type of electrical connection | Push-in terminal |
| • for auxiliary and control circuit | spring-loaded terminals (push-in) |
| type of connectable conductor cross-sections | |
| • solid | 0.5 ... 4 mm ² |
| • finely stranded with core end processing | 0.5 ... 2.5 mm ² |
| • finely stranded without core end processing | 0.5 ... 4 mm ² |
| • at AWG cables solid | 20 ... 12 |
| • at AWG cables stranded | 20 ... 12 |
| • connectable conductor cross-section solid | 0.5 ... 4 mm ² |
| • connectable conductor cross-section finely stranded with core end processing | 0.5 ... 2.5 mm ² |
| • connectable conductor cross-section finely stranded without core end processing | 0.5 ... 4 mm ² |
| • AWG number as coded connectable conductor cross section solid | 20 ... 12 |
| • AWG number as coded connectable conductor cross section stranded | 20 ... 12 |

| Installation/ mounting/ dimensions | | | | | |
|---|--|--|--|---|------------------------------|
| mounting position | any | | | | |
| fastening method | screw and snap-on mounting onto 35 mm standard mounting rail | | | | |
| height | 100 mm | | | | |
| width | 22.5 mm | | | | |
| depth | 90 mm | | | | |
| required spacing | | | | | |
| • with side-by-side mounting | | | | | |
| — forwards | 0 mm | | | | |
| — backwards | 0 mm | | | | |
| — upwards | 0 mm | | | | |
| — downwards | 0 mm | | | | |
| — at the side | 0 mm | | | | |
| • for grounded parts | | | | | |
| — forwards | 0 mm | | | | |
| — backwards | 0 mm | | | | |
| — upwards | 0 mm | | | | |
| — at the side | 0 mm | | | | |
| — downwards | 0 mm | | | | |
| • for live parts | | | | | |
| — forwards | 0 mm | | | | |
| — backwards | 0 mm | | | | |
| — upwards | 0 mm | | | | |
| — downwards | 0 mm | | | | |
| — at the side | 0 mm | | | | |
| Ambient conditions | | | | | |
| installation altitude at height above sea level maximum | 2 000 m | | | | |
| • ambient temperature during operation | -25 ... +60 °C | | | | |
| • ambient temperature during storage | -40 ... +85 °C | | | | |
| • ambient temperature during transport | -40 ... +85 °C | | | | |
| relative humidity during operation | 70 % | | | | |
| Certificates/ approvals | | | | | |
| General Product Approval | | | | | |
| EMC | | | | | |
| Declaration of Conformity | | | | | |
| <div><div> CSA</div><div> CCC</div><div> UL</div><div></div><div> RCM</div><div> EG-Konf.</div></div> | | | | | |
| Declaration of Conformity | Test Certificates | Marine / Shipping | | other | |
| Miscellaneous | Type Test Certificates/Test Report |  LRS |  PRS |  DNV GL | Confirmation |

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2010-2BA30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2010-2BA30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RN2010-2BA30>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2010-2BA30&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RN2010-2BA30/manual>

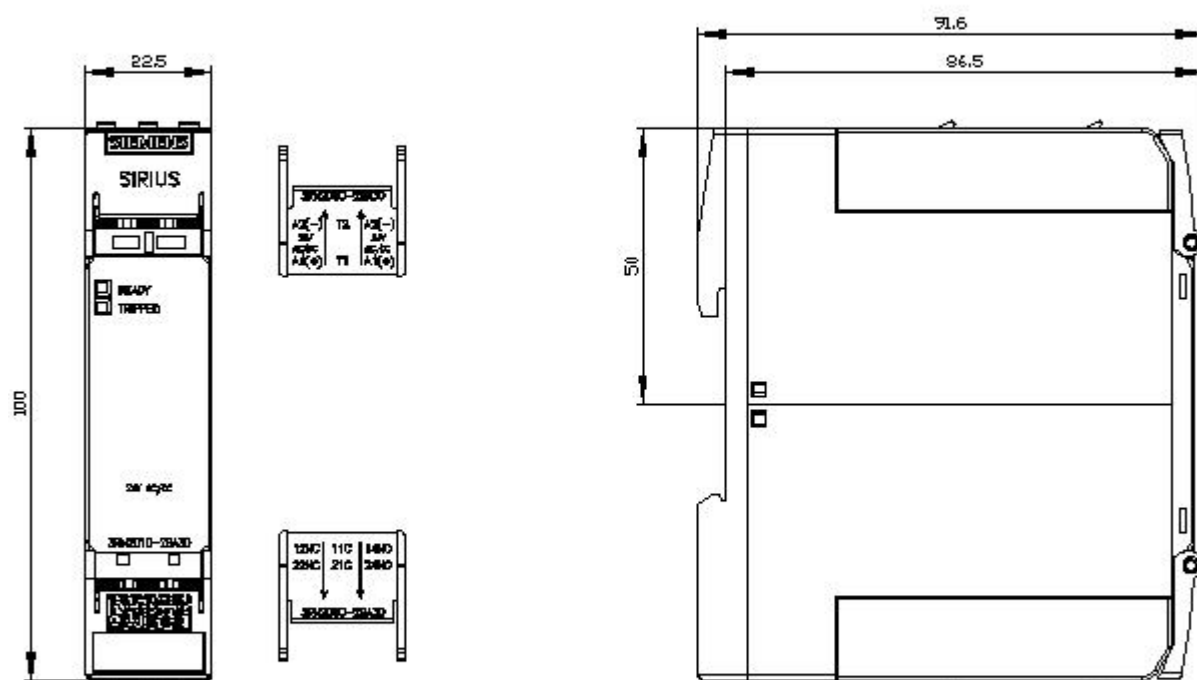

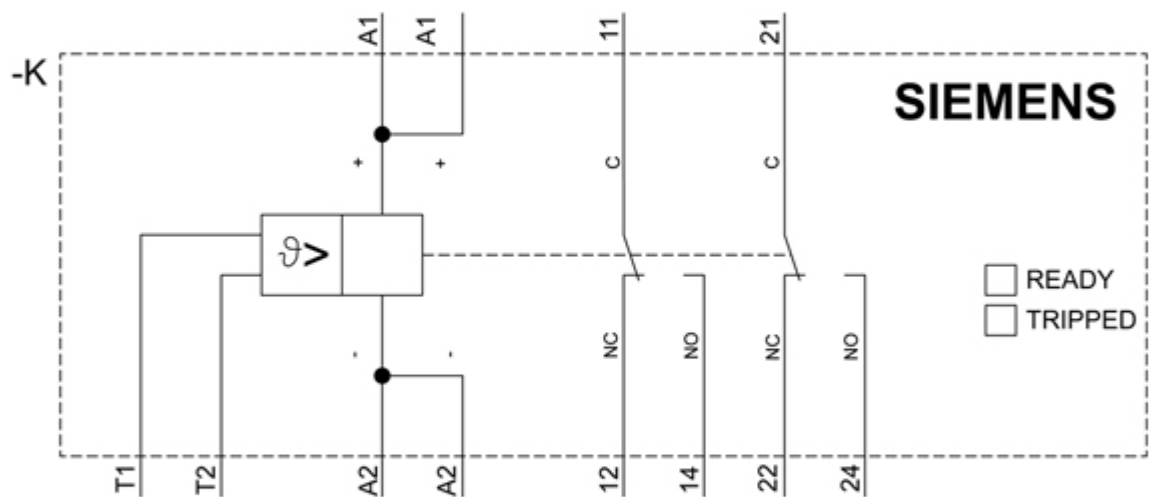

last modified:

12/19/2020 [🔗](#)