



Figure similar

temperature monitoring relay Pt100, overshoot 1 threshold value, width 22.5 mm 0 °C to 200 °C 110-120/220-240 V AC 1 NO + 1 NC, quiescent current principle spring-loaded terminal !!!phased-out product!!! the preferred successor is 3RS2500-2AW30

product brand name	SIRIUS
product designation	Temperature monitoring relay
design of the product	Overshoot, 1 threshold value
product type designation	3RS10

General technical data

power loss [W] maximum	2 W
power loss [V·A] maximum	4 VA
reference code according to IEC 81346-2	K
measurable temperature	
• initial value	0 °C
• full-scale value	200 °C
Substance Prohibitance (Date)	05/01/2012
product function	
• error memory	No
• external reset	No
design of the sensor connectable	PT100 (resistance sensor)

Control circuit/ Control

type of voltage	AC
control supply voltage 1 at AC	
• at 50 Hz rated value	110 V
• at 60 Hz rated value	110 V
control supply voltage 2 at AC	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V
supply voltage frequency for auxiliary and control circuit	50 ... 60 Hz
number of measuring circuits	1

Auxiliary circuit

number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0

Connections/ Terminals

type of electrical connection for auxiliary and control circuit	spring-loaded terminals
type of electrical connection plug-in socket	Yes

Installation/ mounting/ dimensions

fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	84 mm
width	22.5 mm
depth	91 mm

Ambient conditions

ambient temperature during operation

-25 ... +60 °C

Certificates/ approvals

General Product Approval

Declaration of Conformity



[Confirmation](#)



Test Certificates

other

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS1000-2CK20>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS1000-2CK20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RS1000-2CK20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS1000-2CK20&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RS1000-2CK20/manual>

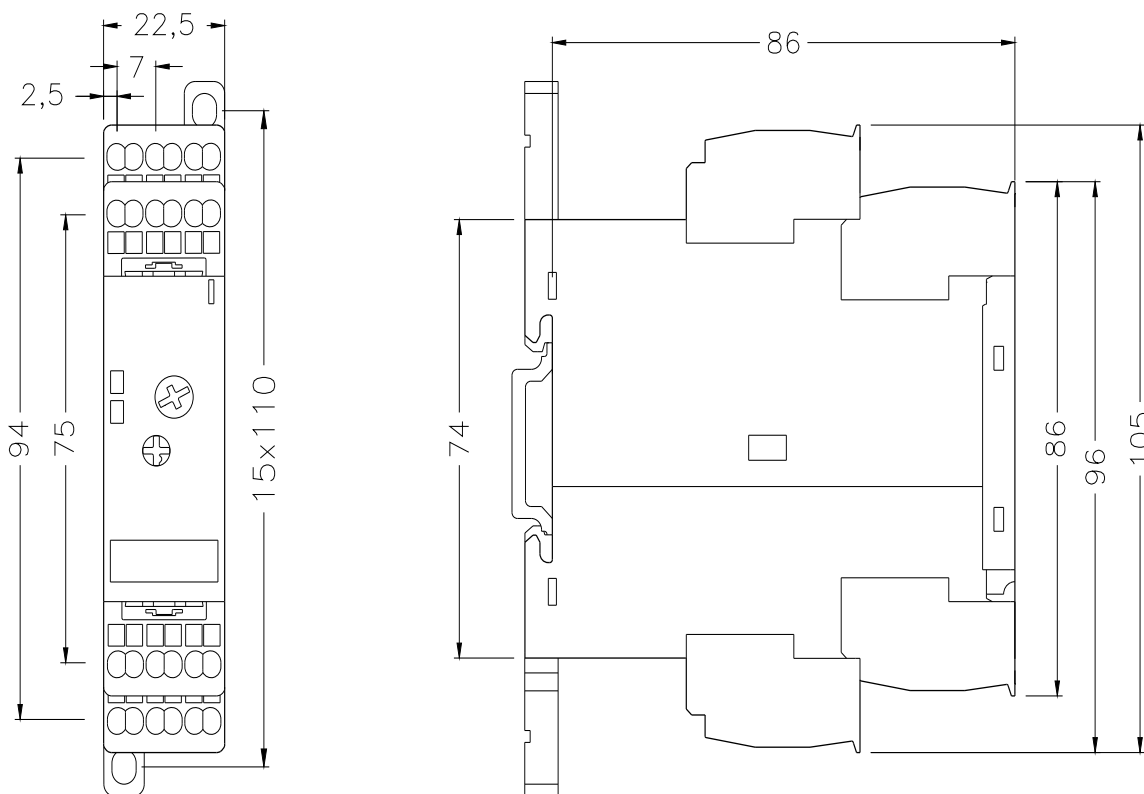

last modified:

11/21/2022 