

Traction contactor, AC-3 65 A, 30 kW / 400 V 24 V DC, 0.7-1.25* Us
3-pole, Size S3 Spring-type terminal With electronic control unit
Integrated varistor !!! Phased-out product !!! Successor is SIRIUS
3RT2 Preferred successor type is >>3RT2037-3XB40-0LA2<<



Product brand name	SIRIUS
Product designation	Power contactor
General technical data	
Size of contactor	S3
Product extension	
function module for communication	No
maximum permissible voltage for safe isolation	
between coil and main contacts acc. to EN 60947-1	690 V
Protection class IP	
- on the front - of the terminal	IP20; IP20 on the front with cover / box terminal IP00
Shock resistance at rectangular impulse	
at DC	6,8g / 5 ms, 4g / 10 ms
Shock resistance with sine pulse	
at DC	10,6g / 5 ms, 6,2g / 10 ms
Mechanical service life (switching cycles)	
of contactor typical	10 000 000

• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Reference code acc. to DIN EN 81346-2	Q

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m

Main circuit

Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating current	
• at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	100 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	100 A
— up to 690 V at ambient temperature 60 °C rated value	90 A
— up to 1000 V at ambient temperature 40 °C rated value	50 A
— up to 1000 V at ambient temperature 60 °C rated value	40 A
• at AC-3	
— at 400 V rated value	65 A
— at 690 V rated value	47 A
— at 1000 V rated value	25 A
• at AC-4 at 400 V rated value	55 A
Minimum cross-section in main circuit	
• at maximum AC-1 rated value	35 mm²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	28 A
• at 690 V rated value	20 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	90 A
— at 110 V rated value	4.5 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	90 A
— at 110 V rated value	90 A

• with 3 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value	90 A 90 A
Operating current	
• at 1 current path at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value • with 3 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value	40 A 2.5 A 90 A 90 A 90 A 90 A
Operating power	
• at AC-1 — at 230 V at 60 °C rated value — at 400 V rated value — at 690 V at 60 °C rated value — at 1000 V at 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value	34 kW 59 kW 102 kW 66 W 30 kW 18.5 kW 30 kW 37 kW 45 kW 30 W
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value • at 690 V rated value	15.1 kW 18.6 kW
No-load switching frequency	
• at DC	1 000 1/h
Operating frequency	
• at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum	1 000 1/h 400 1/h 1 000 1/h 300 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	24 V

Operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.7
• Full-scale value	1.25
Design of the surge suppressor	with varistor
Closing power of magnet coil at DC	19 W
Holding power of magnet coil at DC	12 W
Closing delay	
• at DC	90 ... 230 ms
Opening delay	
• at DC	14 ... 20 ms
Arcing time	10 ... 15 ms
Residual current of the electronics for control with signal <0>	
• at AC at 230 V maximum permissible	25 mA
• at DC at 24 V maximum permissible	43 mA

Auxiliary circuit

Number of NC contacts for auxiliary contacts	
• instantaneous contact	0
Number of NO contacts for auxiliary contacts	
• instantaneous contact	0
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
Operating current at DC-12	
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings

Contact rating of auxiliary contacts according to UL	A600 / Q600
---	-------------

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the main circuit — with type of coordination 1 required	fuse gL/gG: 250 A

- with type of assignment 2 required
- for short-circuit protection of the auxiliary switch required

fuse gL/gG: 125 A

fuse gL/gG: 10 A

Installation/ mounting/ dimensions

Mounting type	screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail
• Side-by-side mounting	Yes
Height	176 mm
Width	70 mm
Depth	152 mm
Required spacing	
• with side-by-side mounting	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
• for grounded parts	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

Connections/ Terminals

Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	spring-loaded terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (2.5 ... 16 mm ²)
— stranded	2x (10 ... 50 mm ²)
— single or multi-stranded	2x (2,5 ... 16 mm ²)
— finely stranded with core end processing	2x (2.5 ... 35 mm ²)
— finely stranded without core end processing	2x (10 ... 35 mm ²)
• at AWG conductors for main contacts	2x (10 ... 1/0)
Type of connectable conductor cross-sections	
• for auxiliary contacts	

- solid 2x (0.25 ... 2.5 mm²)
- finely stranded with core end processing 2x (0.25 ... 1.5 mm²)
- finely stranded without core end processing 2x (0.25 ... 2.5 mm²)
- at AWG conductors for auxiliary contacts 2x (24 ... 14)

Certificates/ approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



CCC



CSA



UL



RCM

[Type Examination Certificate](#)

Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



EG-Konf.

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



ABS



RINA

Marine / Shipping	other	Railway
-------------------	-------	---------



RMRS

[Miscellaneous](#)

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1044-3XB40-0LA2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1044-3XB40-0LA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1044-3XB40-0LA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1044-3XB40-0LA2&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1044-3XB40-0LA2/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1044-3XB40-0LA2&objecttype=14&gridview=view1>

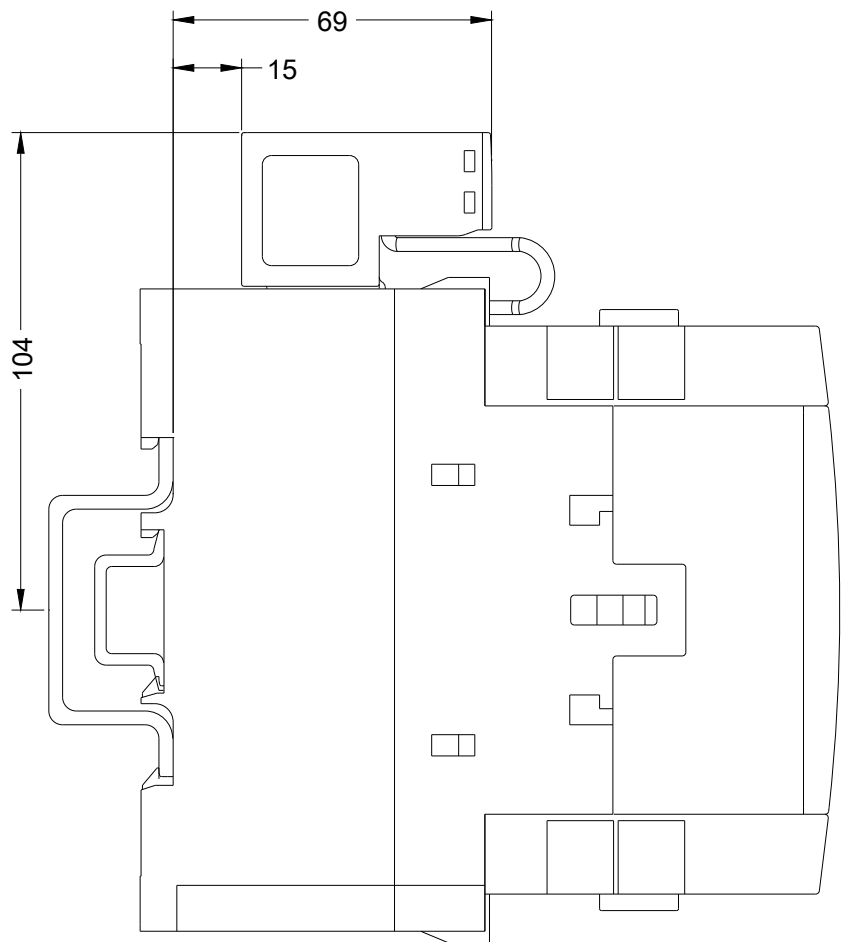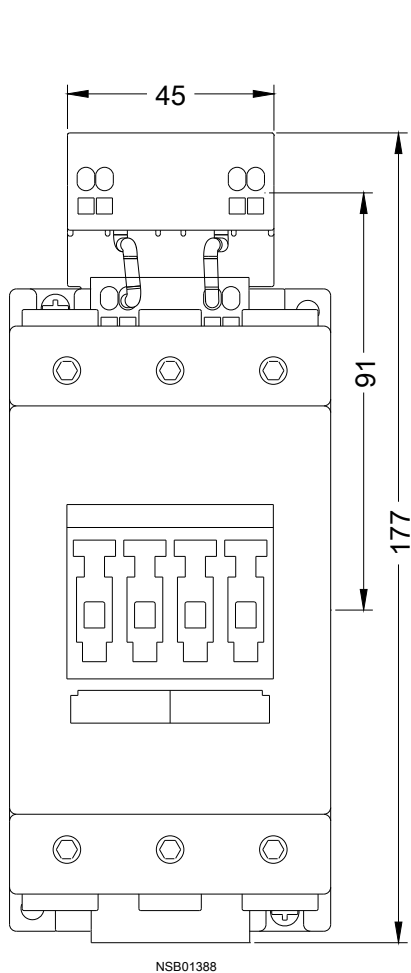

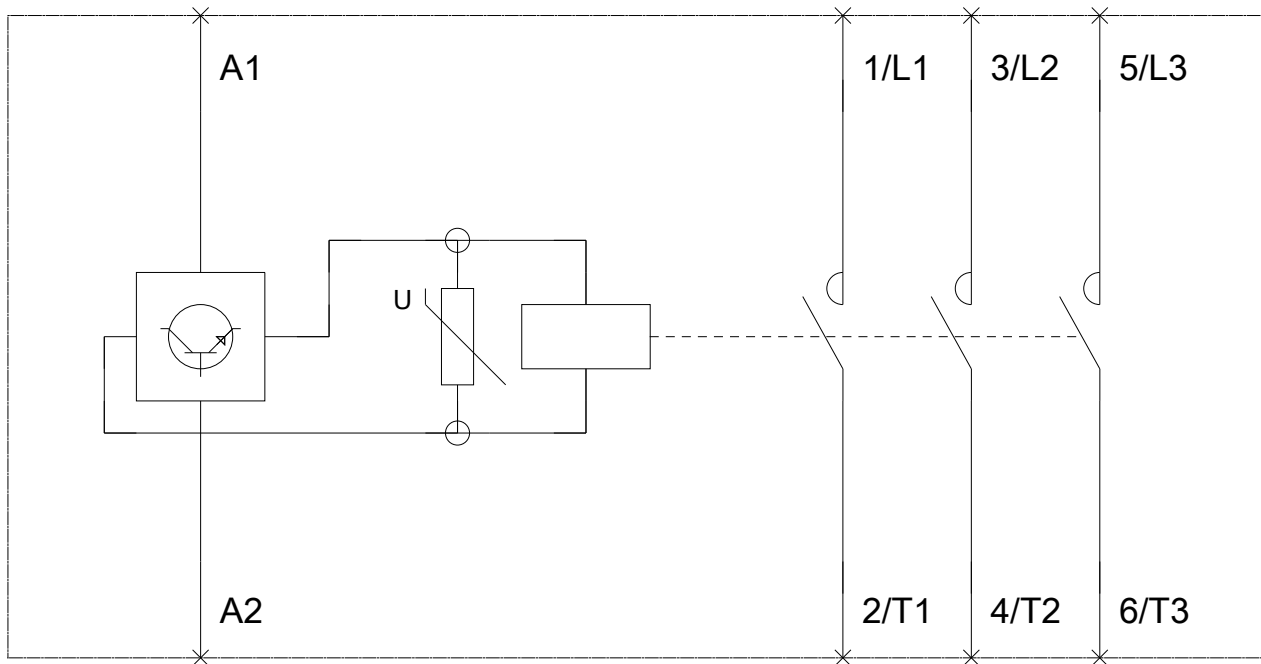

last modified:

04/07/2020