



Power contactor, AC-3 95 A, 45 kW / 400 V 24 V DC, 3-pole, Size S3  
Screw terminal !!! Phased-out product !!! Successor is SIRIUS 3RT2  
Preferred successor type is >>3RT2046-1KB40<<

product brand name

SIRIUS

product designation

power contactor

### General technical data

size of contactor

S3

insulation voltage rated value

1 000 V

degree of pollution

3

surge voltage resistance rated value

6 kV

maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1

690 V

protection class IP

- on the front
- of the terminal

IP20; IP20 on the front with cover / box terminal  
IP00

shock resistance at rectangular impulse

- at DC

6,8g / 5 ms, 4g / 10 ms

shock resistance with sine pulse

- at DC

10,6g / 5 ms, 6,2g / 10 ms

mechanical service life (switching cycles)

- of contactor typical
- of the contactor with added electronically optimized auxiliary switch block typical
- of the contactor with added auxiliary switch block typical

10 000 000

5 000 000

10 000 000

reference code according to IEC 81346-2

Q

Substance Prohibitation (Date)

05/01/2012

### Ambient conditions

installation altitude at height above sea level maximum

2 000 m

ambient temperature

- during operation
- during storage

-25 ... +60 °C

-55 ... +80 °C

### Main circuit

number of poles for main current circuit

3

number of NO contacts for main contacts

3

number of NC contacts for main contacts

0

operational current

- at AC-1 at 400 V at ambient temperature 40 °C rated value

120 A

- at AC-1

— up to 690 V at ambient temperature 40 °C rated value

120 A









— up to 690 V at ambient temperature 60 °C rated value

100 A

— up to 1000 V at ambient temperature 40 °C rated value

70 A

— up to 1000 V at ambient temperature 60 °C rated value	60 A
• at AC-3	
— at 400 V rated value	95 A
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-4 at 400 V rated value	80 A
<b>connectable conductor cross-section in main circuit at AC-1</b>	
• at 60 °C minimum permissible	35 mm <sup>2</sup>
• at 40 °C minimum permissible	50 mm <sup>2</sup>
<b>operational current for approx. 200000 operating cycles at AC-4</b>	
• at 400 V rated value	42 A
• at 690 V rated value	27 A
<b>operating power</b>	
• at AC-1	
— at 230 V at 60 °C rated value	38 kW
— at 400 V rated value	66 kW
— at 690 V rated value	114 kW
— at 690 V at 60 °C rated value	114 kW
— at 1000 V at 60 °C rated value	98 W
• at AC-2 at 400 V rated value	45 kW
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	55 kW
— at 1000 V rated value	37 W
<b>operating power for approx. 200000 operating cycles at AC-4</b>	
• at 400 V rated value	22 kW
• at 690 V rated value	25.4 kW
<b>thermal short-time current limited to 10 s</b>	760 A
<b>no-load switching frequency</b>	
• at DC	1 000 1/h
<b>operating frequency</b>	
• at AC-1 maximum	900 1/h
• at AC-2 maximum	350 1/h
• at AC-3 maximum	850 1/h
• at AC-4 maximum	250 1/h
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC</b>	
• rated value	24 V
<b>operating range factor control supply voltage rated value of magnet coil at DC</b>	
• initial value	0.8
• full-scale value	1.1
<b>closing power of magnet coil at DC</b>	15 W
<b>holding power of magnet coil at DC</b>	15 W
<b>closing delay</b>	
• at DC	90 ... 230 ms
<b>opening delay</b>	
• at DC	14 ... 20 ms
<b>arcing time</b>	10 ... 15 ms
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts instantaneous contact	0
number of NO contacts for auxiliary contacts instantaneous contact	0
operational current at AC-12 maximum	10 A
<b>operational current at AC-15</b>	
• at 230 V rated value	6 A
• at 400 V rated value	3 A

<b>operational current at DC-12</b>	
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
<b>operational current at DC-13</b>	
• at 24 V rated value	10 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
<b>contact reliability of auxiliary contacts</b>	1 faulty switching per 100 million (17 V, 1 mA)
<b>UL/CSA ratings</b>	
<b>contact rating of auxiliary contacts according to UL</b>	A600 / Q600
<b>Short-circuit protection</b>	
<b>design of the fuse link</b>	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	fuse gL/gG: 250 A
— with type of assignment 2 required	fuse gL/gG: 160 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b>	screw and snap-on mounting onto 35 mm and 75 mm DIN rail
• side-by-side mounting	Yes
<b>height</b>	146 mm
<b>width</b>	70 mm
<b>depth</b>	152 mm
required spacing for grounded parts at the side	6 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	2x (2.5 ... 16 mm <sup>2</sup> )
— stranded	2x (10 ... 50 mm <sup>2</sup> )
— solid or stranded	2x (2.5 ... 16 mm <sup>2</sup> )
— finely stranded with core end processing	2x (2.5 ... 35 mm <sup>2</sup> )
— finely stranded without core end processing	2x (10 ... 35 mm <sup>2</sup> )
• at AWG cables for main contacts	2x (10 ... 1/0)
<b>type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
• at AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12
<b>Certificates/ approvals</b>	
<div> <div>General Product Approval</div> <div>   <a href="#">Confirmation</a>    </div> </div>	
<div> <div> <div>Declaration of Conformity</div> <div>   </div> </div> <div> <div>Test Certificates</div> <div> <a href="#">Type Test Certificates/Test Report</a> <a href="#">Special Test Certificate</a> <a href="#">Miscellaneous</a> </div> </div> <div> <div>Marine / Shipping</div>  </div> </div>	
Marine / Shipping	other
Railway	



#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1046-1BB40>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1046-1BB40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1046-1BB40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1046-1BB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1046-1BB40&lang=en)


Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1046-1BB40/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1046-1BB40&objecttype=14&gridview=view1>

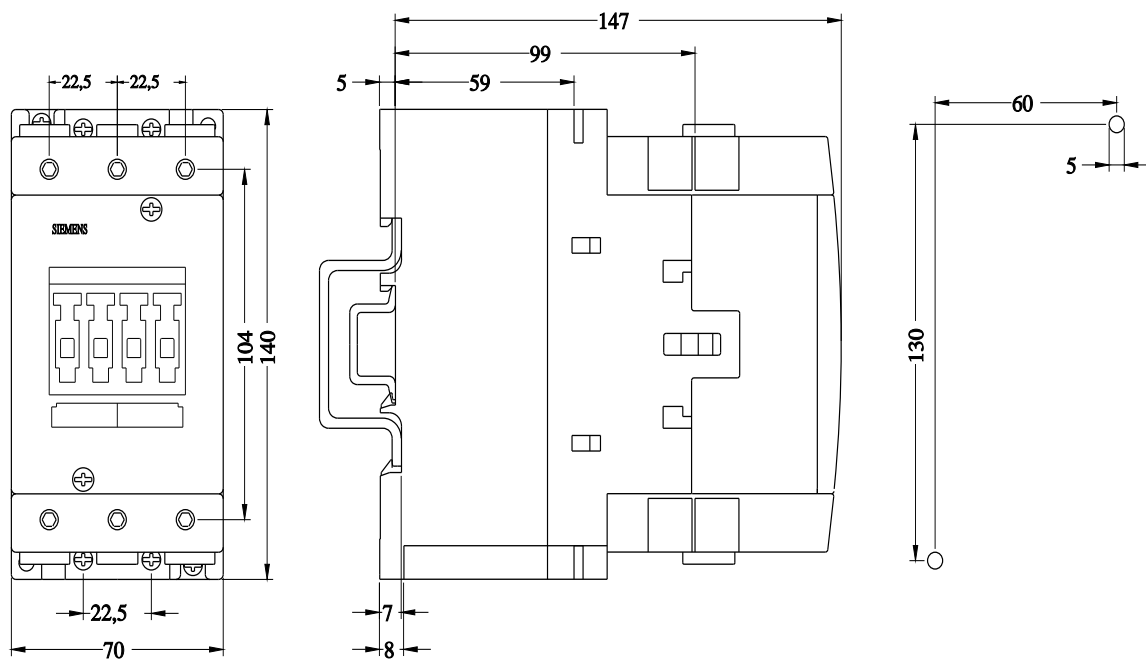

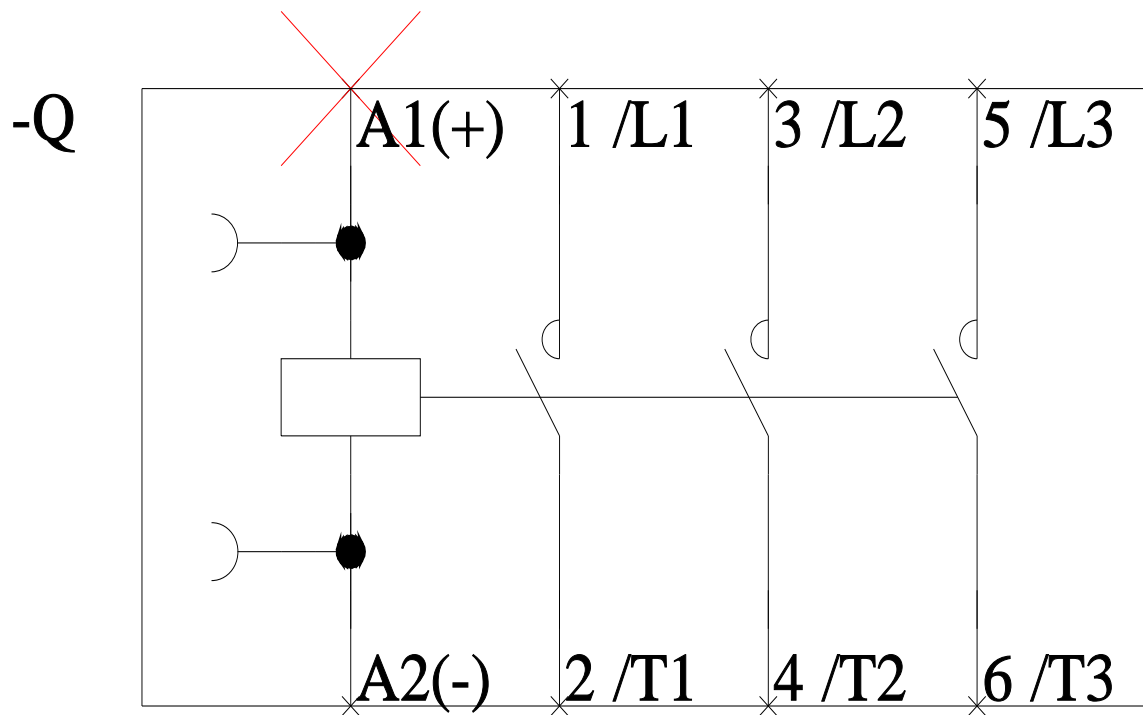

last modified:

11/21/2022 