



CAPACITOR SW. CONTACTOR, AC-6, 50KVAR/400V,
110V, 50HZ, 3-POLE, SIZE S3

Figure similar

General technical data:

Protection class IP		IP20
Equipment marking		
• acc. to DIN EN 61346-2		Q
• acc. to DIN EN 81346-2		Q

Main circuit:

Number of NC contacts for main contacts		0
Number of NO contacts for main contacts		3
Operating current		
• at AC-1		
— at 400 V Rated value	A	90

Control circuit/ Control:

Type of voltage		AC
Control supply voltage with AC		
• at 50 Hz Rated value	V	110 ... 110
Supply voltage frequency for auxiliary and control current circuit Rated value	Hz	50 ... 50

Auxiliary circuit:

Number of NC contacts		
• for auxiliary contacts		0
Number of NO contacts		
• for auxiliary contacts		1
Identification number and letter for switching elements		1

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
• Side-by-side mounting		Yes
Height	mm	167
Width	mm	70
Depth	mm	183

Connections/ Terminals:

Type of electrical connection		
• for main current circuit • for auxiliary and control current circuit		screw-type terminals screw-type terminals

Ambient conditions:

Ambient temperature		
• during operation	°C	-25 ... +60

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
 CCC	 EAC	 EG-Konf.
 CSA	 UL	Type Examination

Test Certificates	Shipping Approval	other
Special Test Certificate	 ABS	Confirmation
	 DNV	
	 GL	
	 RMRS	

other
Environmental Confirmations
other



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

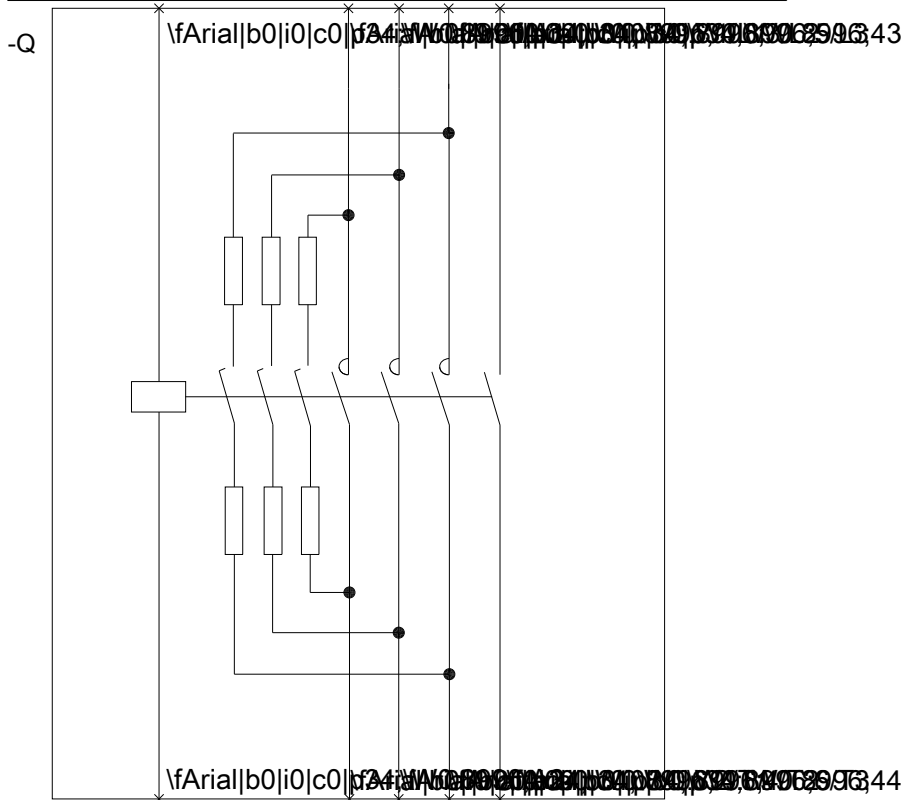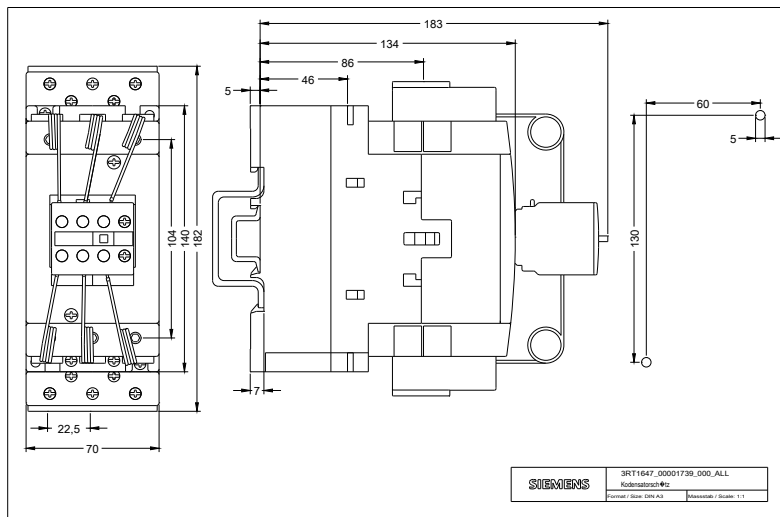

last modified:

11.03.2015